

Montage- und Bedienungsanleitung

Hera LED Linienleuchte 220-240 V ~ 50-60 Hz

Typ SlimLite® CS LED DIM HO+

Bestimmungsgemäße Verwendung

Drehbare LED Linienleuchte, universell geeignet. Auch als Lichtbandleuchte. Nur für den Betrieb im Innenbereich geeignet.




Funkentstört
dimmbar (1-10V / 1,5mA)



1. Die Montage und Demontage darf nur im spannungslosen Zustand durchgeführt werden!
2. Beim Austausch von defekten Teilen dürfen nur Originalteile verwendet werden.
3. Das Leuchtmittel besteht aus nicht-wechselbaren Leuchtdioden (LED). Die Leuchte nicht demontieren da das Licht der Leuchtdioden das menschliche Auge verletzen kann.
4. Die hohe Lebensdauer der Leuchtdioden (min. 30.000 Stunden bzw. ca. 3,5 Jahre bei ununterbrochener Leuchtdauer) macht einen Leuchtmittelwechsel nicht erforderlich.
5. Die Einbauabstände müssen eingehalten werden. Bei Nichtbeachtung besteht Überhitzungsgefahr.
6. Alle Steckverbindungen immer bis zum Anschlag einführen.
7. Ein fester Netzanschluß oder die Montage des beiliegenden Netzsteckers bzw. Netzklammer darf nur vom Fachmann erstellt werden. Wenn die äußere flexible Leitung dieser Leuchte beschädigt ist, darf sie nur durch eine spezielle Leitung oder durch eine Leitung ersetzt werden, die ausschließlich über den Hersteller oder seinen Servicevertreter erhältlich ist. Zu montierende Schraubklemmen müssen der EN 60998-2-1 entsprechen (z.B. Wieland Typ 21.310.0353.0)
8. max. zulässige Umgebungstemperatur: 35°C
9. Vor der Montage muß auf die Laufrichtung der Einspeisung geachtet werden. (IN -- OUT)
10. Die Dimmleitungen sind nicht austauschbar!
11. Beim Anschluß der Dimm-Steuerleitung an eine Steuereinheit ist auf die richtige Polung zu achten!
12. Die Leuchten können nicht mit einem Phasenan- oder -abschnittdimmer betrieben werden.

Montagemaße

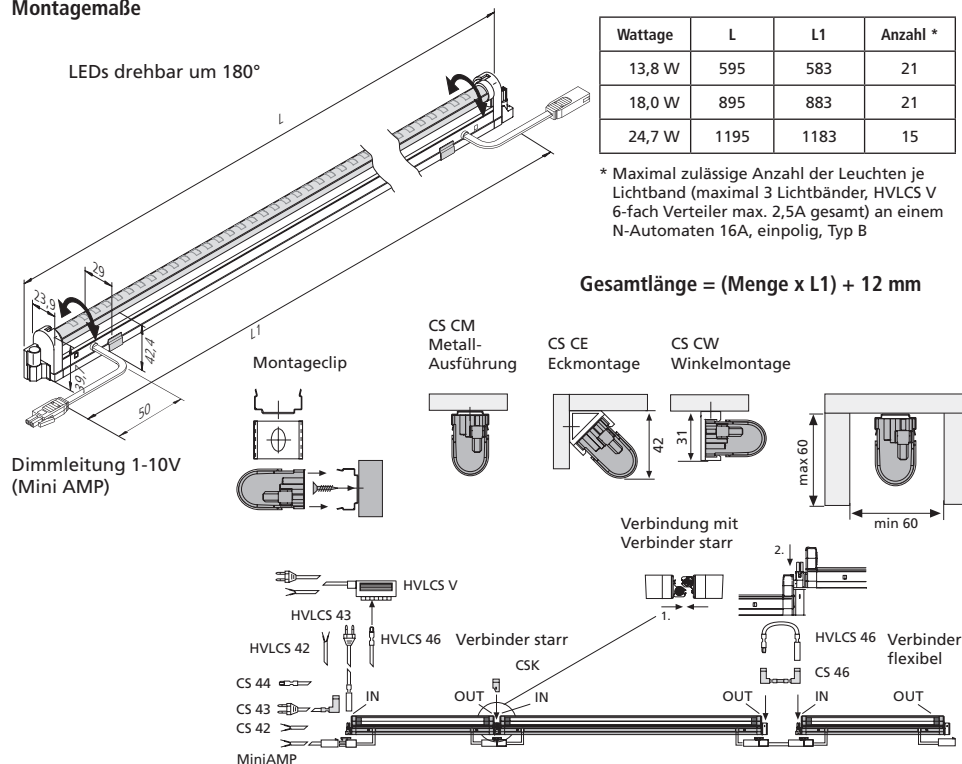

Bei Reinigung der Oberflächen nur milde Reinigungsmittel und weiche Lappen benutzen!



Entsorgen Sie elektrische Geräte nicht im Hausmüll, nutzen Sie die Sammelstellen in Ihrer Gemeinde. Wenn Sie das Gerät durch ein neues ersetzen, ist der Verkäufer gesetzlich verpflichtet, das alte mindestens kostenlos zur Entsorgung entgegenzunehmen.

Hera Hera GmbH & Co. KG
Dieselstraße 9
32130 Enger / Germany

Nachdruck auch auszugsweise verboten.

Assembly and operating Instructions

Hera LED Linear Luminaire 220-240 V ~ 50-60 Hz

Type SlimLite® CS LED DIM HO+



Radio-interference-suppressed
dimmbare (1-10V / 1,5mA)


Intended use

Swivel and tilt LED linear luminaire, designed for universal use; also suitable for use as a lighting row luminaire. This product is for indoor use only.



1. Disconnect from the mains supply before attempting to mount/ dismount the lighting fixture.
2. Faulty parts should only be replaced with original parts.
3. The light source of these luminaire are non-changeable light diodes (LED). Do not disassemble the luminaire as the light diode can cause damage to the eyes.
4. The luminaire is not provide for a bulb replacement because of the lifespan of the light diodes (min. 30.000 hours or approx. 3,5 years at continuous luminous period).
5. The specified installation distances must be maintained. This warning must be observed to avoid the risk of overheating.
6. Always fully insert all plug connections.
7. Permanent connection to the mains or the assembly of the enclosed mains plug or main terminal may only be carried out by a qualified electrician. If the external flexible cable or cord of this luminaire is damaged, it must be replaced by a special cord or cord exclusively available from the manufacturer or his service agent. The screw clamps must comply with EN 60998-2-1 (e.g. Wieland type 21.310.0353.0).
8. max. permitted ambient temperature: 35°C
9. The direction of the supply must be observed prior to installation (IN OUT).
10. The dimmer control cables are nonexchangeable!
11. Pay attention to correct poling when connecting the dimmer control line with a control unit!
12. The luminaires cannot be operated with a leading or trailing edge dimmer.

Assembly dimensions

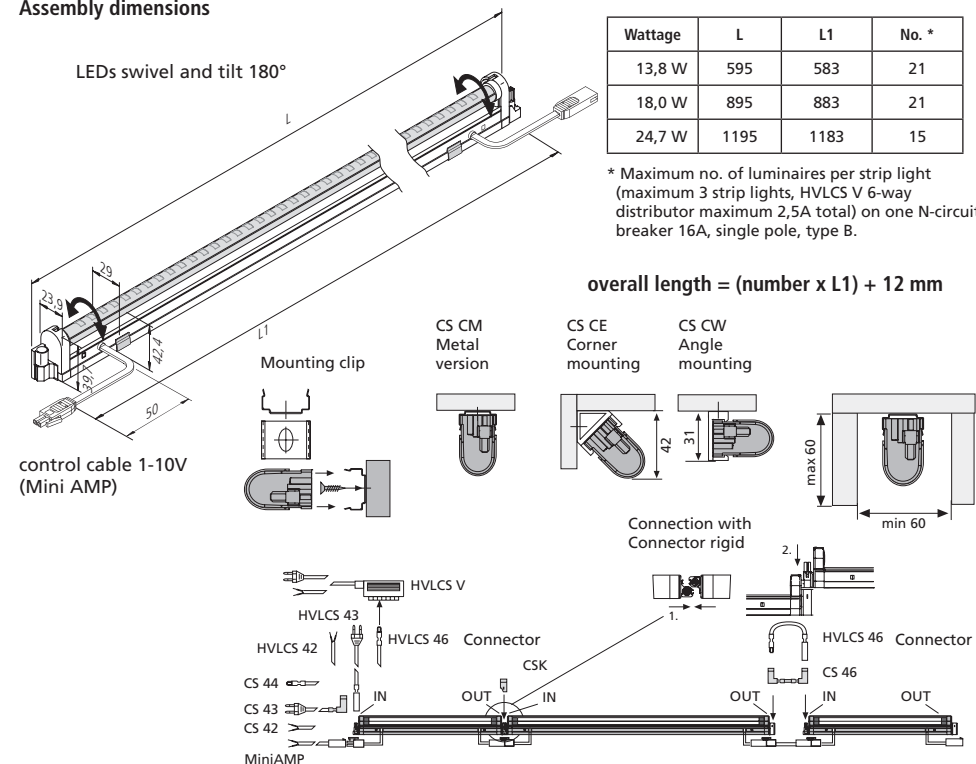

Only clean surfaces with a mild cleaning agent using a soft cloth!



Do not dispose of electrical appliances in household waste, use separate collection facilities. When replacing old appliances with new ones, the retailer is obliged by law to accept to take back your old appliance for disposal free of charge.

Reproduction of this document in whole or part is forbidden.

Hera Hera GmbH & Co. KG
Dieselstraße 9
32130 Enger / Germany