

connector domestic type - with hinged lid and increased contact protection (Shutter), System E Belgian/French standard




Product description	
BALS-Prd.-Nr	749109
EAN	4024941854061
Product category	Domestic connector, Domestic connector
Current	16A, 16A
Number of poles	3p, 3p
Arrangement of phases	2P+PE, 2P+PE
Voltage	250V~, 250V~

Product description	
Frequency	AC, AC
Protection degree	IP54, IP54
Colour code	grey RAL 7035, grey RAL 7035
Colour of appliance	Housing cover grey RAL 7035, Housing cover grey RAL 7035
Connection design	head-screw terminal, head-screw terminal
Maximum conductor size	4,0 qmm, 4,0 qmm
Cable entry	with cable gland, with cable gland
Height	123mm, 123mm
Width	52mm, 52mm
Depth	64mm, 64mm
Material of enclosure	Polyamide, Polyamide
Contacts	the contacts are brass nickel plated, The contact carrier is made of polyamide, the contacts are brass nickel plated, The contact carrier is made of polyamide

Additional technical properties	
	With increased contact protection (shutter), With increased contact protection (shutter)
	MULTI-GRIP cable gland with gasket and integrated strain relief, MULTI-GRIP cable gland with gasket and integrated strain relief
	With self-closing hinged lid, With self-closing hinged lid

Logistics data	
Weight/pcs	0.094 kg / Piece
Packaging	Bag
Content amount	1 ST
EAN	4024941854061
Length	64 mm
Width	52 mm
Height	123 mm
Weight	0.095 kg
Volume	409.344 ccm
Packaging	Carton
Content amount	20 ST
EAN	4024941324779
Length	245 mm
Width	177 mm
Height	185 mm
Weight	2.013 kg
Volume	7,140 ccm

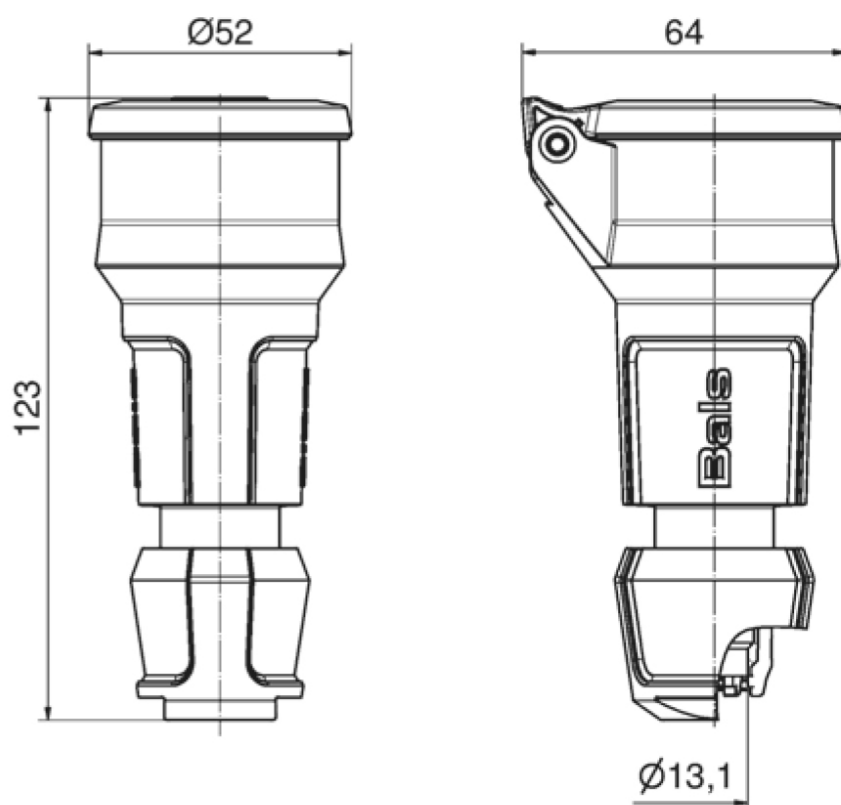

18 MB 120