


003-877 Instruction, Closet Connector Housing (CCH) 4U

003-877-QSG Instruction, 4U Closet Connector Housing (CCH) Quick Start Guide


1. Removing Standard Projection Mounting Brackets

- Step 1:** Press the buttons on each side of the housing to disengage the front section.
- Step 2:** Remove the front section of the housing.
- Step 3:** With a screwdriver, remove the screws holding the mounting and L-shaped brackets to each side of the front section of the housing.
- Step 4:** Remove and discard the standard projection mounting brackets and screws.

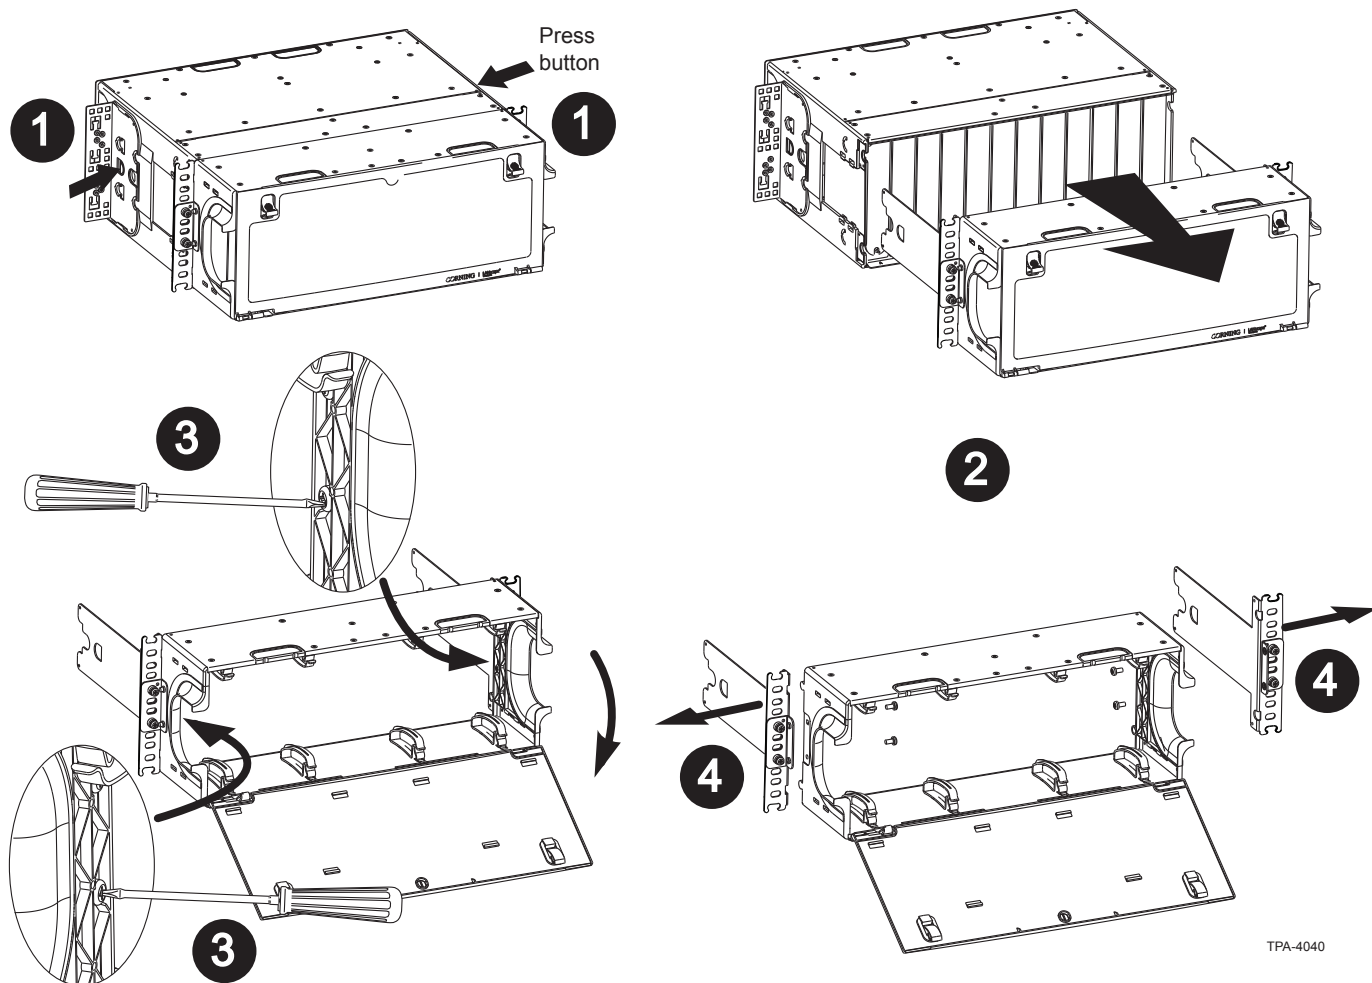


2. Installing Brackets for a 3-inch Projection




- Step 1:** Remove standard projection mounting brackets as described in Section 1. Attach mounting brackets from kit (p/n CCH4-3INCH-KIT-5) to each side of the housing with the screws provided in the kit.
- Step 2:** Slide mounting brackets back onto rear section of the housing until the button clicks into the opening in the bracket.
- Step 3:** Install the empty housing from the front of the rack as described in the instruction provided with the housing.

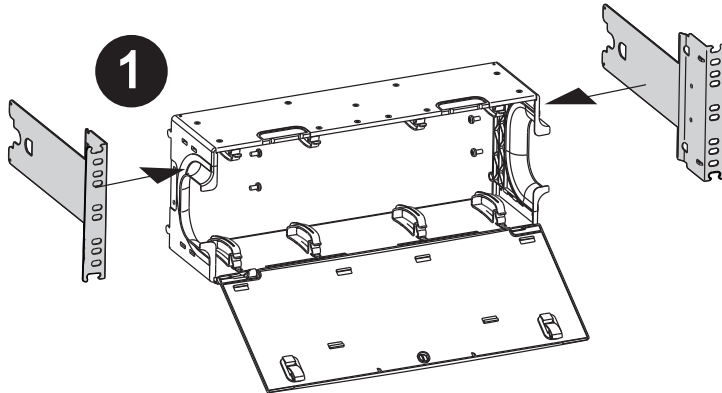


Brackets installed for 3-in projection from frame

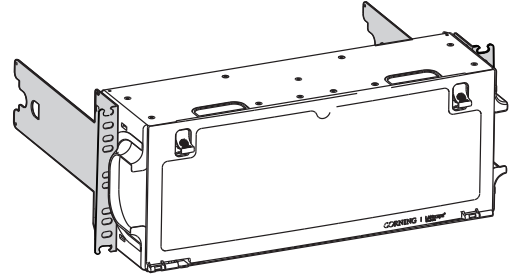

Housing ready for installation with a 3-in projection from frame

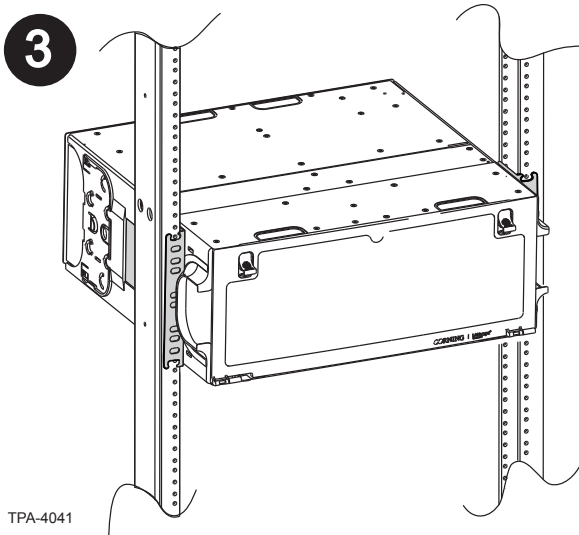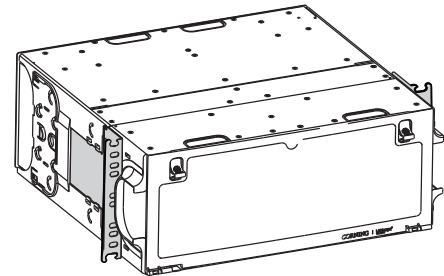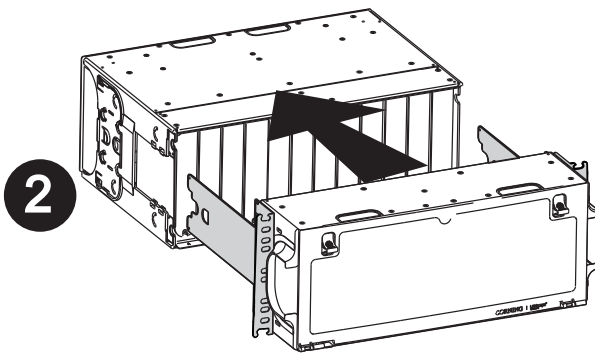


TPA-4041

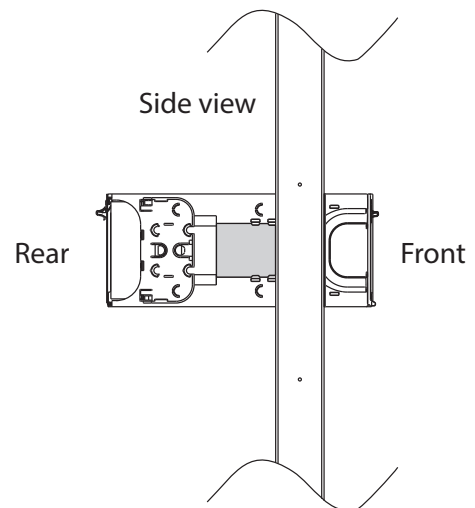


3. Installing Brackets for a Flush-mounted Application





- Step 1:** Remove standard projection mounting brackets as described in Section 1. Attach mounting brackets from kit (p/n CCH4-RECESS-KIT-5) to each side of the housing with the screws provided in the kit.
- Step 2:** Slide mounting brackets back onto rear section of the housing until the button clicks into the opening in the bracket.
- Step 3:** Install the empty housing from the front of the rack as described in the instruction provided with the housing.

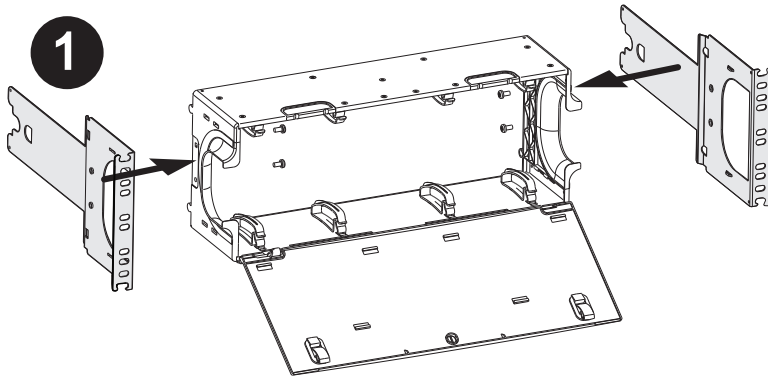

Brackets installed for flush-mount projection from frame

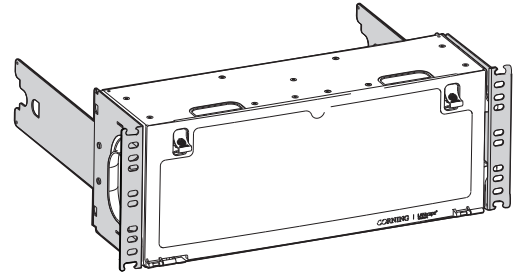

Housing ready for installation with a flush-mount projection from frame

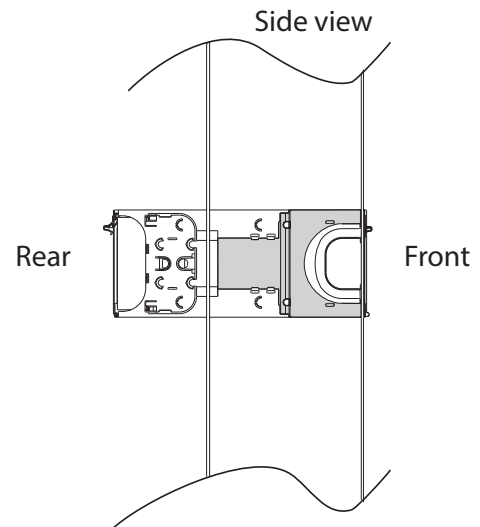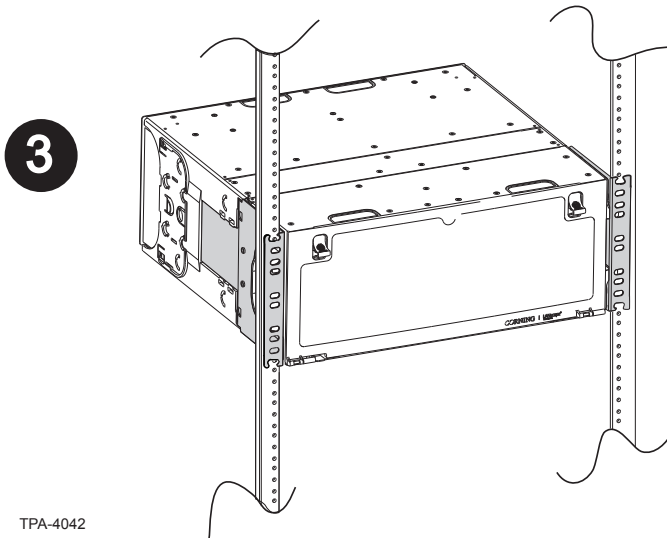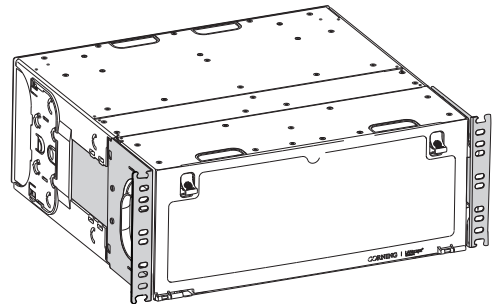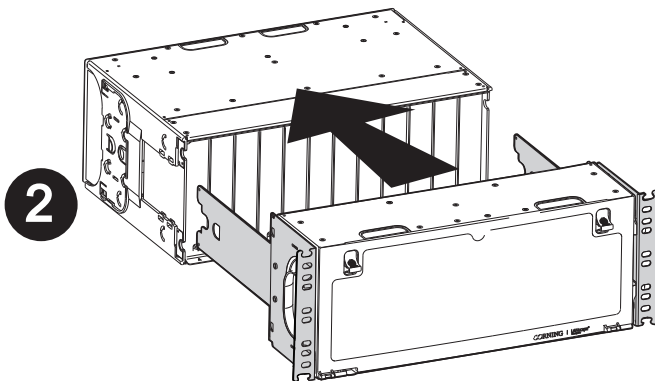

TPA-4042

Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA
800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

Corning Optical Communications reserves the right to improve, enhance, and modify the features and specifications of Corning Optical Communications products without prior notification. A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks. All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified. © 2012, 2015 Corning Optical Communications. All rights reserved.
