

CORNING

EDGE™ Solutions Single-Module Housing Expander

P/N 003-1079-AEN

Issue 1


[related literature](#) | Search corning.com/opcomm. Click on “Resources/Standard Recommended Procedures.”

003-1049-AEN

EDGE™ Solution Single Module Housing for Splicing

1.0 CARTON CONTENTS

Single-module housing (EDGE-SMH-XPDR)

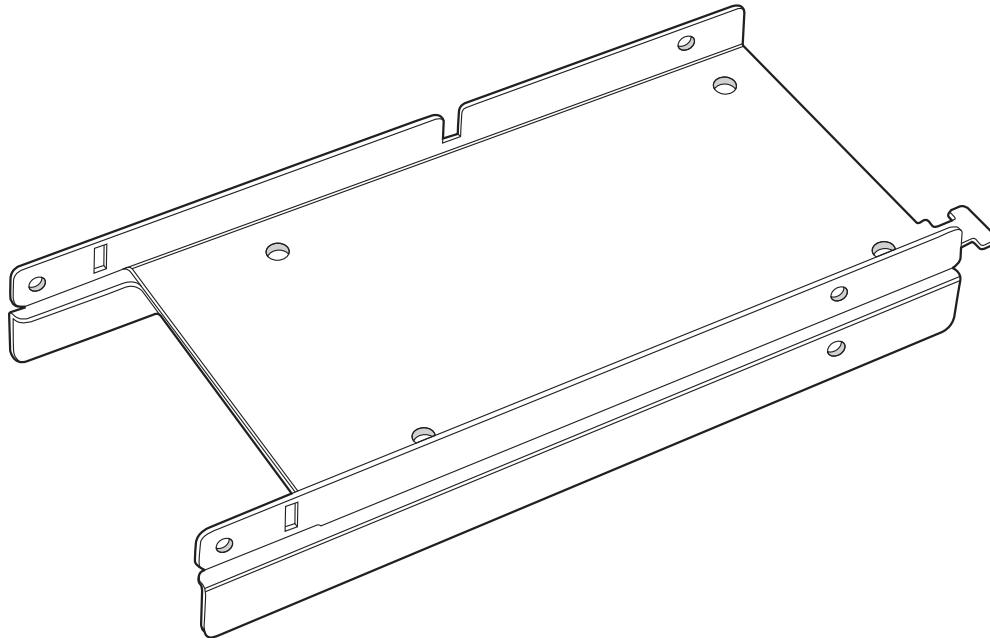

2.0 TOOLS AND MATERIALS


- Phillips screwdriver

Parts in Section 3.1 (ordered separately):


- MTP® connector module for EDGE-SMH-XPDR
(P/N ECM-UM12-05-93T - OM3 multimode;
ECM-UM12-05-93Q - OM4 multimode;
or ECM-UM12-04-89G - OS2 single-mode)

3.0 INSTALLATION


3.1 EDGE™ MTP® connector module into EDGE-SMH-XPDR

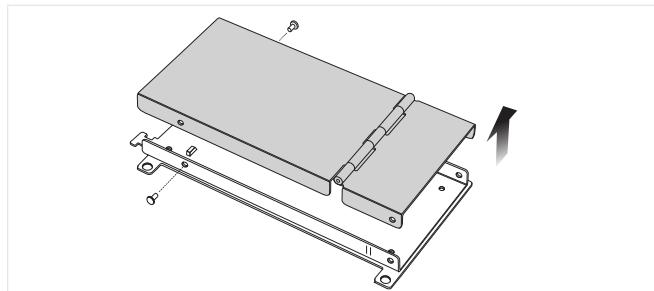


1 Remove screws. Lift cover off.

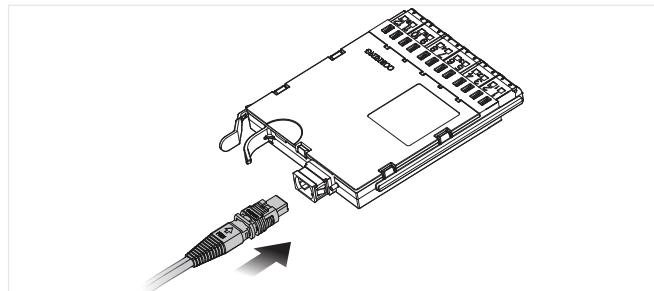


2 Clean and insert MTP connector into module.

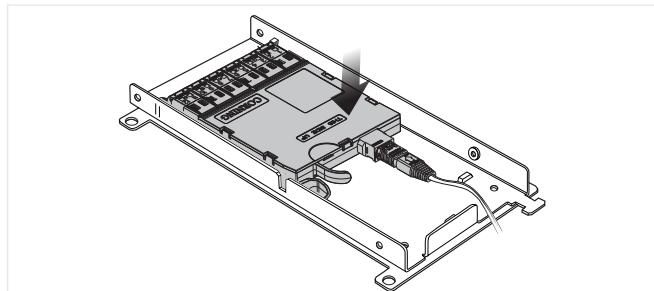


3 Install module into SMH.

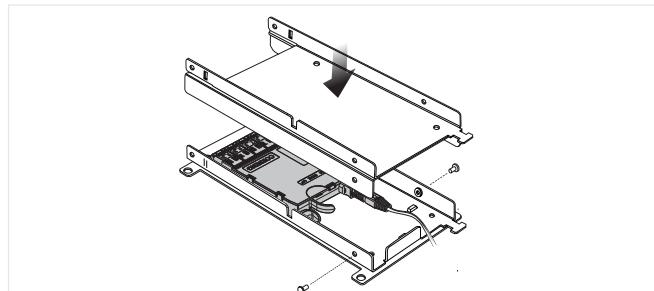


4 Use two screws to attach the EDGE-SMH-XPDR to the EDGE-SMH-SPLC Base.

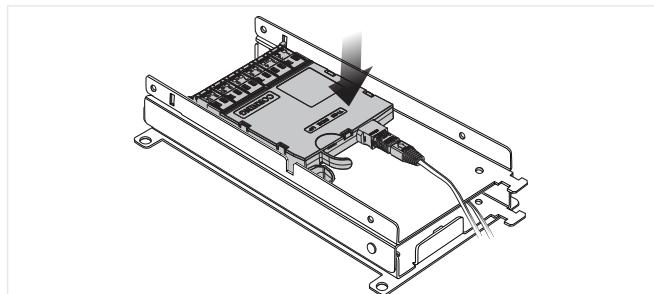


5 Install next module into the EDGE-SMH-XPDR.

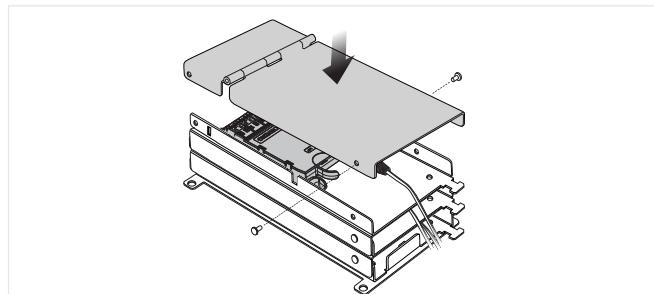

6 To add additional modules, repeat steps 4 and 5. If this is the final module, affix cover of EDGE-SMH-SPLC using two screws.

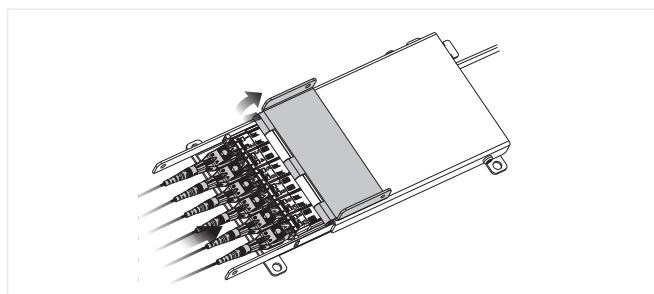

7 Open hinged lid. Clean and insert connectors into cleaned adapters.

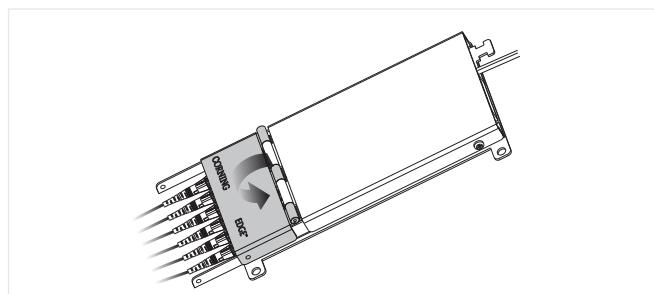

8 Close hinged lid.