


Han 4A-SC-F

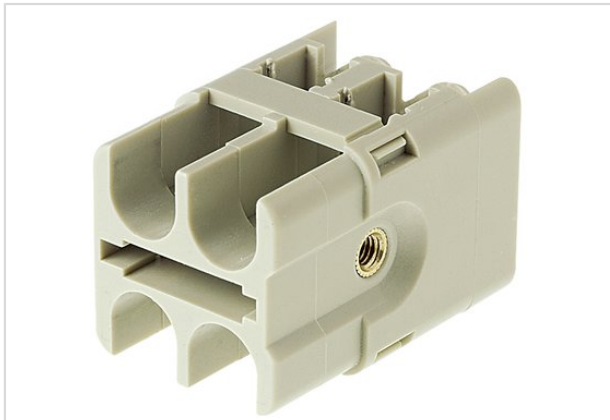

Part number	09 20 004 4711
Specification	Han 4A-SC-F
HARTING eCatalogue	https://b2b.harting.com/09200044711

Identification

Category	Inserts
Series	Han-Brid [®]
Identification	Han [®] 4 A SC

Description of the contact for FO

Version

Gender	Female
Size	3 A
Number of contacts	4
Details	Please order contacts separately.

Technical characteristics

Insulation resistance	$\geq 10^{10} \Omega$
Limiting temperature	-40 ... +85 °C
Mating cycles	≥ 500

Material properties

Material (insert)	Polycarbonate
Colour (insert)	RAL 7032 (pebble grey)
Material flammability class acc. to UL 94	V-0
RoHS	compliant with exemption
RoHS exemptions	6c: Copper alloy containing up to 4 % lead by weight
ELV status	compliant with exemption
China RoHS	50
REACH Annex XVII substances	No
REACH ANNEX XIV substances	No
REACH SVHC substances	Yes



Pushing Performance

Material properties

REACH SVHC substances	Lead
-----------------------	------

Specifications and approvals

UL / CSA	UL 1977 ECBT2.E235076
	CSA-C22.2 No. 182.3 ECBT8.E235076

Commercial data

Packaging size	1
Net weight	8.38 g
Country of origin	Germany
Customs tariff number	85366990