

Panel mounting socket outlet angled TN - flange 114x114 fixing centers 90x90



Product description

| | |
|---------------------------|---|
| BALS-Prd.-Nr | 12264 |
| EAN | 4024941122641 |
| Product category | TN panel mounting socket outlet, angled |
| Current | 125A |
| Number of poles | 5p |
| Arrangement of phases | 3p+N+PE |
| Position of earth contact | 2 h |
| Voltage | > 50V~ |

Product description


| | |
|--------------------------------|--|
| Frequency | > 300 - 500Hz |
| VG-type-no.: | VG 96919 BS 016 |
| Supply no.: | 5935-12-347-3942 |
| Protection degree | IP67 |
| Colour code | bronze-green RAL 6031-F9 |
| Colour of appliance | Bayonet ring bronze-green RAL 6031-F9, Hinged lid bronze-green RAL 6031-F9, Enclosure bronze-green RAL 6031-F9 |
| Connection design | screw terminal as box terminal with Kontex-contact |
| Maximum conductor size | 70.0 qmm (possible limitation by the used cable entry) |
| Cable entry | other |
| Height | 134mm |
| Width | 125mm |
| Depth | 173mm |
| Flange size vertical in mm | 114mm |
| Flange size horizontal in mm | 114mm |
| Drill hole dist. vertical mm | 90mm |
| Drill hole dist. horizontal mm | 90mm |
| Material of enclosure | Polyamide |
| Contacts | the contact carrier is made of high temperature resistant material, the contacts are brass nickel plated |

Additional technical properties

| | |
|--|--|
| | The inclination is 15°, with pilot contact |
| | With bayonet cover on strap |

Logistics data

| | |
|----------------|------------------|
| Weight/pcs | 1.045 kg / Piece |
| Packaging | Bag |
| Content amount | 1 ST |
| EAN | 4024941122641 |
| Length | 173 mm |
| Width | 125 mm |
| Height | 134 mm |
| Weight | 1.046 kg |
| Volume | 2,897.75 ccm |
| Packaging | Carton |
| Content amount | 5 ST |
| EAN | 4024941838894 |
| Length | 325 mm |
| Width | 217 mm |
| Height | 210 mm |
| Weight | 5.431 kg |
| Volume | 13,588.4 ccm |

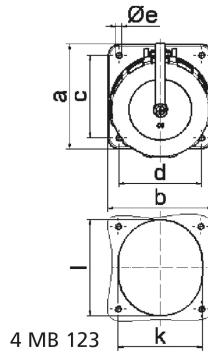

| Ampere Polzahl | 63 3 | 63 4 | 63 5 | 125 3 | 125 4 | 125 5 |
|----------------------------|---------|---------|---------|----------|----------|----------|
| a | 114,0 | 114,0 | 114,0 | 114,0 | 114,0 | 114,0 |
| b | 114,0 | 114,0 | 114,0 | 114,0 | 114,0 | 114,0 |
| c | 90,0 | 90,0 | 90,0 | 90,0 | 90,0 | 90,0 |
| d | 90,0 | 90,0 | 90,0 | 90,0 | 90,0 | 90,0 |
| e ø | 5,5 | 5,5 | 5,5 | 6,5 | 6,5 | 6,5 |
| f | 12,0 | 12,0 | 12,0 | 12,0 | 12,0 | 12,0 |
| h | 65,0 | 65,0 | 65,0 | 82,0 | 82,0 | 82,0 |
| i | 82,0 | 82,0 | 82,0 | 90,0 | 90,0 | 90,0 |
| k | 92,0 | 92,0 | 92,0 | 92,0 | 92,0 | 92,0 |
| l | 92,0 | 92,0 | 92,0 | 105,0 | 105,0 | 105,0 |
| α | 15° | 15° | 15° | 15° | 15° | 15° |
| Leiter mm ² min | 6,0 | 6,0 | 6,0 | 25,0 | 25,0 | 25,0 |
| Leiter mm ² max | 25,0 | 25,0 | 25,0 | 70,0 | 70,0 | 70,0 |

4 MB 123