

## Panel mounting socket outlet angled - flange 100x92 fixing centers 85x77




| Product description       |                                                       |
|---------------------------|-------------------------------------------------------|
| BALS-Prd.-Nr              | 120274                                                |
| EAN                       | 4024941146845                                         |
| Product category          | TE panel mounting socket outlet QUICK-CONNECT, angled |
| Current                   | 63A                                                   |
| Number of poles           | 5p                                                    |
| Arrangement of phases     | 3p+N+PE                                               |
| Position of earth contact | 6 h                                                   |
| Voltage                   | 200/346 - 240/415V~                                   |

| Product description            |                                                                                                          |
|--------------------------------|----------------------------------------------------------------------------------------------------------|
| Frequency                      | 50/60Hz                                                                                                  |
| Protection degree              | IP67                                                                                                     |
| Colour code                    | red RAL 3000                                                                                             |
| Colour of appliance            | Hinged lid red RAL 3000, Bayonet ring grey RAL 7035, Enclosure grey RAL 7035                             |
| Connection design              | screwless spring terminal with box terminals and kontekst-contact                                        |
| Maximum conductor size         | 25.0 qmm                                                                                                 |
| Cable entry                    | other                                                                                                    |
| Height                         | 120mm                                                                                                    |
| Width                          | 111mm                                                                                                    |
| Depth                          | 168mm                                                                                                    |
| Flange size vertical in mm     | 100mm                                                                                                    |
| Flange size horizontal in mm   | 92mm                                                                                                     |
| Drill hole dist. vertical mm   | 85mm                                                                                                     |
| Drill hole dist. horizontal mm | 77mm                                                                                                     |
| Material of enclosure          | Polyamide                                                                                                |
| Contacts                       | the contact carrier is made of high temperature resistant material, the contacts are brass nickel plated |

| Additional technical properties |                        |
|---------------------------------|------------------------|
|                                 | The inclination is 15° |

| Logistics data |                  |
|----------------|------------------|
| Weight/pcs     | 0.645 kg / Piece |
| Packaging      | Bag              |
| Content amount | 1 ST             |
| EAN            | 4024941146845    |
| Length         | 168 mm           |
| Width          | 111 mm           |
| Height         | 120 mm           |
| Weight         | 0.646 kg         |
| Volume         | 2,237.76 ccm     |
| Packaging      | Carton           |
| Content amount | 10 ST            |
| EAN            | 4024941949941    |
| Length         | 295 mm           |
| Width          | 185 mm           |
| Height         | 215 mm           |
| Weight         | 6.614 kg         |
| Volume         | 9,975 ccm        |

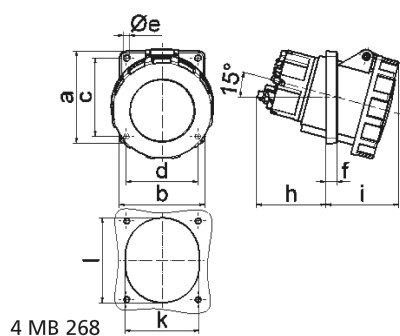

|                            |       |       |  |  |  |  |
|----------------------------|-------|-------|--|--|--|--|
| Ampere                     | 63    | 63    |  |  |  |  |
| Polzahl                    | 4     | 5     |  |  |  |  |
| a                          | 100,0 | 100,0 |  |  |  |  |
| b                          | 92,0  | 92,0  |  |  |  |  |
| c                          | 85,0  | 85,0  |  |  |  |  |
| d                          | 77,0  | 77,0  |  |  |  |  |
| e ø                        | 6,5   | 6,5   |  |  |  |  |
| f                          | 12,0  | 12,0  |  |  |  |  |
| h                          | 74,0  | 74,0  |  |  |  |  |
| i                          | 80,0  | 80,0  |  |  |  |  |
| k                          | 80,0  | 80,0  |  |  |  |  |
| l                          | 92,0  | 92,0  |  |  |  |  |
| Leiter mm <sup>2</sup> min | 6     | 6     |  |  |  |  |
| Leiter mm <sup>2</sup> max | 25    | 25    |  |  |  |  |
|                            |       |       |  |  |  |  |