


## Panel mounting socket outlet straight - flange 107x100 fixing centers 85x77

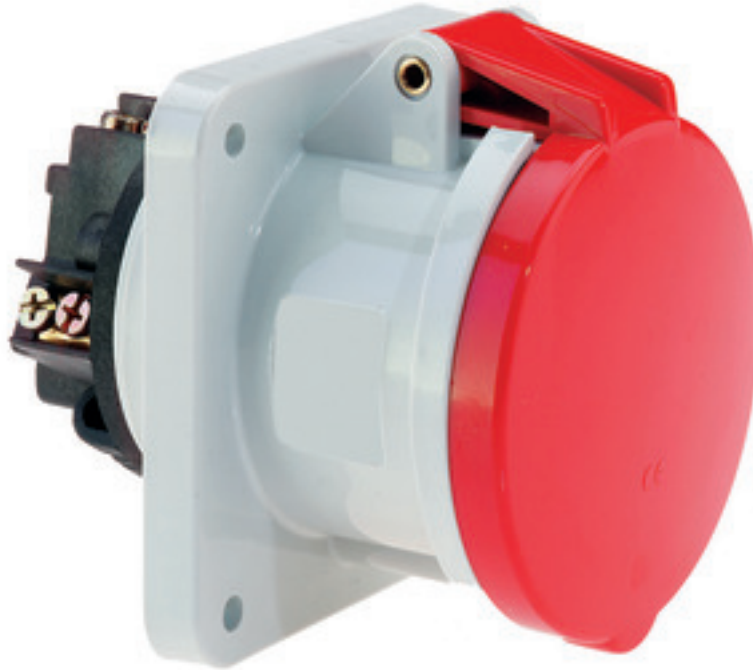


| Product description       |   |
|---------------------------|---|
| BALS-Prd.-Nr              | 13343                                     |
| EAN                       | 4024941133432                             |
| Product category          | TE panel mounting socket outlet, straight |
| Current                   | 63A                                       |
| Number of poles           | 5p  |
| Arrangement of phases     | 3p+N+PE                                   |
| Position of earth contact | 6 h                                       |
| Voltage                   | 200/346 - 240/415V~                       |

| Product description            |  |
|--------------------------------|--|
| Frequency                      | 50/60Hz  |
| Protection degree              | IP44   |
| Colour code                    | red RAL 3000   |
| Colour of appliance            | Hinged lid red RAL 3000, Enclosure grey RAL 7035   |
| Connection design              | screw terminal as box terminal with Kontex-contact   |
| Maximum conductor size         | 25.0 qmm   |
| Cable entry                    | other  |
| Height                         | 114mm  |
| Width                          | 100mm  |
| Depth                          | 134mm  |
| Flange size vertical in mm     | 107mm  |
| Flange size horizontal in mm   | 100mm  |
| Drill hole dist. vertical mm   | 85mm   |
| Drill hole dist. horizontal mm | 77mm   |
| Material of enclosure          | Polyamide  |
| Contacts                       | the contact carrier is made of high temperature resistant material, the contacts are brass nickel plated |

| Logistics data |                 |
|----------------|-----------------|
| Weight/pcs     | 0.63 kg / Piece |
| Packaging      | Bag             |
| Content amount | 1 ST            |

| Logistics data |               |
|----------------|---------------|
| EAN            | 4024941133432 |
| Length         | 134 mm        |
| Width          | 100 mm        |
| Height         | 114 mm        |
| Weight         | 0.631 kg      |
| Volume         | 1,527.6 ccm   |
| Packaging      | Carton        |
| Content amount | 5 ST          |
| EAN            | 4024941831321 |
| Length         | 295 mm        |
| Width          | 185 mm        |
| Height         | 215 mm        |
| Weight         | 3.314 kg      |
| Volume         | 9,975 ccm     |

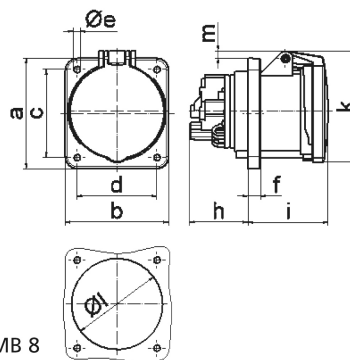

4 MB 8

| Ampere                     | 63    | 63    | 63    |  |  |  |
|----------------------------|-------|-------|-------|--|--|--|
| Polzahl                    | 3     | 4     | 5     |  |  |  |
| a                          | 107,0 | 107,0 | 107,0 |  |  |  |
| b                          | 100,0 | 100,0 | 100,0 |  |  |  |
| c                          | 85,0  | 85,0  | 85,0  |  |  |  |
| d                          | 77,0  | 77,0  | 77,0  |  |  |  |
| e ø                        | 6,5   | 6,5   | 6,5   |  |  |  |
| f                          | 12,0  | 12,0  | 12,0  |  |  |  |
| h                          | 56,5  | 56,5  | 56,5  |  |  |  |
| i                          | 77,0  | 77,0  | 77,0  |  |  |  |
| k                          | 110,0 | 110,0 | 110,0 |  |  |  |
| l ø                        | 88,0  | 88,0  | 88,0  |  |  |  |
| m                          | 7,0   | 7,0   | 7,0   |  |  |  |
| Leiter mm <sup>2</sup> min | 6     | 6     | 6     |  |  |  |
| Leiter mm <sup>2</sup> max | 25    | 25    | 25    |  |  |  |