

Plug - with screwless terminals for harsh applications



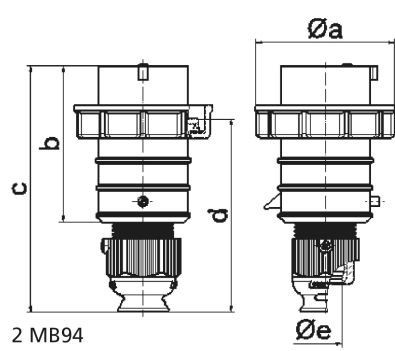
Product description	
BALS-Prd.-Nr	21239
EAN	4024941212397
Product category	QUICK-CONNECT TE plug
Current	16A
Number of poles	5p
Arrangement of phases	3p+N+PE
Position of earth contact	6 h
Voltage	200/346 - 240/415V~
Frequency	50/60Hz

Product description	
Protection degree	IP67
Colour code	red RAL 3000
Colour of appliance	Housing cover red RAL 3000, Collar red RAL 3000, Cable gland grey RAL 7035
Connection design	screwless spring-clamp technology
Maximum conductor size	2,5 qmm
Cable entry	with cable gland
Height	154mm
Width	87mm
Depth	87mm
Material of enclosure	Polyamide
Contacts	the contact carrier is made of high temperature resistant material, the contacts are brass nickel plated

Additional technical properties	
	For cable diameter from 10 up to max. 21 mm, MULTI-GRIP cable gland with gasket, integrated cable clamp and additional water evacuation openings

Logistics data	
Weight/pcs	0.214 kg / Piece
Packaging	Bag
Content amount	1 ST
EAN	4024941212397

Logistics data	
Length	87 mm
Width	87 mm
Height	154 mm
Weight	0.215 kg
Volume	1,165.626 ccm
Packaging	Carton
Content amount	10 ST
EAN	4024941958103
Length	258 mm
Width	183 mm
Height	212 mm
Weight	2.292 kg
Volume	8,750 ccm

 2 MB94	<table> <tr> <th>Ampere</th><th>16</th><th>16</th><th>16</th><th>32</th><th>32</th><th>32</th></tr> <tr> <th>Polzahl</th><th>3</th><th>4</th><th>5</th><th>3</th><th>4</th><th>5</th></tr> <tr> <td>a ø</td><td>70,0</td><td>78,0</td><td>86,0</td><td>94,0</td><td>94,0</td><td>101,0</td></tr> <tr> <td>b</td><td>95,0</td><td>95,0</td><td>97,0</td><td>118,0</td><td>118,0</td><td>117,0</td></tr> <tr> <td>c</td><td>145,0</td><td>145,0</td><td>152,0</td><td>178,0</td><td>178,0</td><td>181,0</td></tr> <tr> <td>d</td><td>111,0</td><td>111,0</td><td>119,0</td><td>136,0</td><td>136,0</td><td>138,5</td></tr> <tr> <td>e ø</td><td>18,0</td><td>18,0</td><td>21,0</td><td>23,0</td><td>23,0</td><td>27,0</td></tr> <tr> <td>Leiter mm² min</td><td>1</td><td>1</td><td>1</td><td>2,5</td><td>2,5</td><td>2,5</td></tr> <tr> <td>Leiter mm² max</td><td>2,5</td><td>2,5</td><td>2,5</td><td>6</td><td>6</td><td>6</td></tr> <tr><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td><td> </td></tr> </table>						Ampere	16	16	16	32	32	32	Polzahl	3	4	5	3	4	5	a ø	70,0	78,0	86,0	94,0	94,0	101,0	b	95,0	95,0	97,0	118,0	118,0	117,0	c	145,0	145,0	152,0	178,0	178,0	181,0	d	111,0	111,0	119,0	136,0	136,0	138,5	e ø	18,0	18,0	21,0	23,0	23,0	27,0	Leiter mm² min	1	1	1	2,5	2,5	2,5	Leiter mm² max	2,5	2,5	2,5	6	6	6																												
Ampere	16	16	16	32	32	32																																																																																											
Polzahl	3	4	5	3	4	5																																																																																											
a ø	70,0	78,0	86,0	94,0	94,0	101,0																																																																																											
b	95,0	95,0	97,0	118,0	118,0	117,0																																																																																											
c	145,0	145,0	152,0	178,0	178,0	181,0																																																																																											
d	111,0	111,0	119,0	136,0	136,0	138,5																																																																																											
e ø	18,0	18,0	21,0	23,0	23,0	27,0																																																																																											
Leiter mm² min	1	1	1	2,5	2,5	2,5																																																																																											
Leiter mm² max	2,5	2,5	2,5	6	6	6																																																																																											