

Wall mounting socket outlet - 7 poles housing dimensions 126x83




| Product description | |
|---------------------------|-----------------------------|
| BALS-Prd.-Nr | 11482 |
| EAN | 4024941114820 |
| Product category | Wall mounting socket outlet |
| Current | 32A |
| Number of poles | 7p |
| Arrangement of phases | 6p+PE |
| Position of earth contact | 9 h |
| Voltage | 230V~ |

| Product description | |
|------------------------|---|
| Frequency | 50/60Hz |
| Protection degree | IP44 |
| Colour code | blue RAL 5015 |
| Colour of appliance | Hinged lid blue RAL 5015, Housing bottom grey RAL 7035, Housing top grey RAL 7035, Collar grey RAL 7035 |
| Connection design | with screw terminal |
| Maximum conductor size | 10,0 qmm |
| Cable entry | 1xM25 top, 2xM25 bottom |
| Height | 157mm |
| Width | 83mm |
| Depth | 136mm |
| Dimension of enclosure | 126x83 mm (HxW) |
| Material of enclosure | Polyamide |
| Contacts | the contact carrier is made of high temperature resistant material, the contacts are brass |

| Additional technical properties | |
|---------------------------------|---|
| | The cable entry is one at top open and two at bottom closed |
| | Lower part of housing rotatable by 180° |
| | 4 cut out fixing holes in the lower part of housing |

| Logistics data | |
|----------------|------------------|
| Weight/pcs | 0.453 kg / Piece |
| Packaging | Bag |
| Content amount | 1 ST |
| EAN | 4024941114820 |
| Length | 136 mm |
| Width | 83 mm |
| Height | 157 mm |
| Weight | 0.454 kg |
| Volume | 1,772.216 ccm |
| Packaging | Carton |
| Content amount | 10 ST |
| EAN | 4024941959018 |
| Length | 330 mm |
| Width | 216 mm |
| Height | 260 mm |
| Weight | 4.756 kg |
| Volume | 17,062.5 ccm |

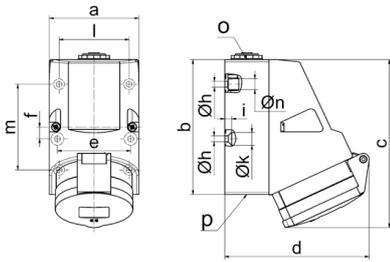

1 MB 124

| Ampere | 16 | 32 | | | | |
|----------------------------|---------|---------|--|--|--|--|
| Polzahl | 7 | 7 | | | | |
| a | 83,0 | 83,0 | | | | |
| b | 126,0 | 126,0 | | | | |
| c | 155,0 | 155,0 | | | | |
| d | 130,0 | 136,0 | | | | |
| e | 68,0 | 68,0 | | | | |
| f | 11,0 | 11,0 | | | | |
| h ø | 5,5 | 5,5 | | | | |
| i | 6,5 | 6,5 | | | | |
| k ø | 12,0 | 12,0 | | | | |
| l | 65,0 | 65,0 | | | | |
| m | 80,0 | 80,0 | | | | |
| n ø | 10,0 | 10,0 | | | | |
| o | M25 | M25 | | | | |
| p | 2 x M25 | 2 x M25 | | | | |
| Leiter mm ² min | 1,5 | 2,2 | | | | |
| Leiter mm ² max | 4 | 10 | | | | |

