

## Wall mounting socket outlet fused - housing dimensions 225x118 with fuse base D 0




| Product description       |                                                  |
|---------------------------|--------------------------------------------------|
| BALS-Prd.-Nr              | 1589                                             |
| EAN                       | 4024941015899                                    |
| Product category          | QUICK-CONNECT wall mounting socket outlet, fused |
| Current                   | 32A                                              |
| Number of poles           | 5p                                               |
| Arrangement of phases     | 3p+N+PE                                          |
| Position of earth contact | 6 h                                              |
| Voltage                   | 200/346 - 240/415V~                              |

| Product description    |                                                                                                                                              |
|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|
| Frequency              | 50/60Hz                                                                                                                                      |
| Protection degree      | IP44                                                                                                                                         |
| Colour code            | red RAL 3000                                                                                                                                 |
| Colour of appliance    | Operating window smoky topaz, Hinged lid red RAL 3000, Housing screws grey RAL 7035, Housing bottom grey RAL 7035, Housing top grey RAL 7035 |
| Connection design      | screwless spring terminals with KONTEX-contact                                                                                               |
| Maximum conductor size | 10,0 qmm                                                                                                                                     |
| Cable entry            | top entry M25/M25 bottom entry M25                                                                                                           |
| Height                 | 251mm                                                                                                                                        |
| Width                  | 118mm                                                                                                                                        |
| Depth                  | 141mm                                                                                                                                        |
| Dimension of enclosure | 225x118 mm (HxW)                                                                                                                             |
| Material of enclosure  | Polycarbonate                                                                                                                                |
| Contacts               | the contact carrier is made of polyamide, the contacts are brass nickel plated                                                               |

| Additional technical properties |                                                                                        |
|---------------------------------|----------------------------------------------------------------------------------------|
|                                 | The cable entry is one at top open, one at top is closed, and two at bottom are closed |
|                                 | With fuse base 3 pole D02                                                              |

| Logistics data |                  |
|----------------|------------------|
| Weight/pcs     | 1.146 kg / Piece |

| Logistics data |               |
|----------------|---------------|
| Packaging      | Carton        |
| Content amount | 1 ST          |
| EAN            | 4024941015899 |
| Length         | 275 mm        |
| Width          | 175 mm        |
| Height         | 137 mm        |
| Weight         | 1.271 kg      |
| Volume         | 5,737.5 ccm   |

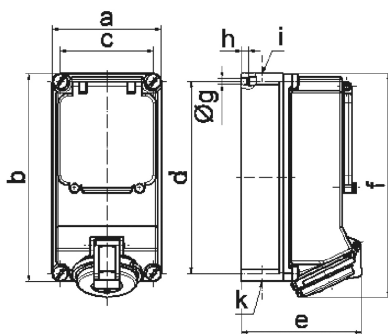

14 MB 13

| Ampere  | 16      | 16      | 32      | 32      | 32      |  |
|---------|---------|---------|---------|---------|---------|--|
| Polzahl | 4       | 5       | 3       | 4       | 5       |  |
| a       | 118,0   | 118,0   | 118,0   | 118,0   | 118,0   |  |
| b       | 225,0   | 225,0   | 225,0   | 225,0   | 225,0   |  |
| c       | 101,0   | 101,0   | 101,0   | 101,0   | 101,0   |  |
| d       | 208,0   | 208,0   | 208,0   | 208,0   | 208,0   |  |
| e       | 123,0   | 130,0   | 134,0   | 134,0   | 141,0   |  |
| f       | 242,0   | 242,0   | 250,0   | 250,0   | 250,0   |  |
| g       | 6,5     | 6,5     | 6,5     | 6,5     | 6,5     |  |
| h ø     | 8,0     | 8,0     | 8,0     | 8,0     | 8,0     |  |
| i       | 2 x M25 | 2 x M25 | 2 x M25 | 2 x M25 | 2 x M25 |  |
| k       | 2 x M25 | 2 x M25 | 2 x M25 | 2 x M25 | 2 x M25 |  |
|         |         |         |         |         |         |  |
|         |         |         |         |         |         |  |