
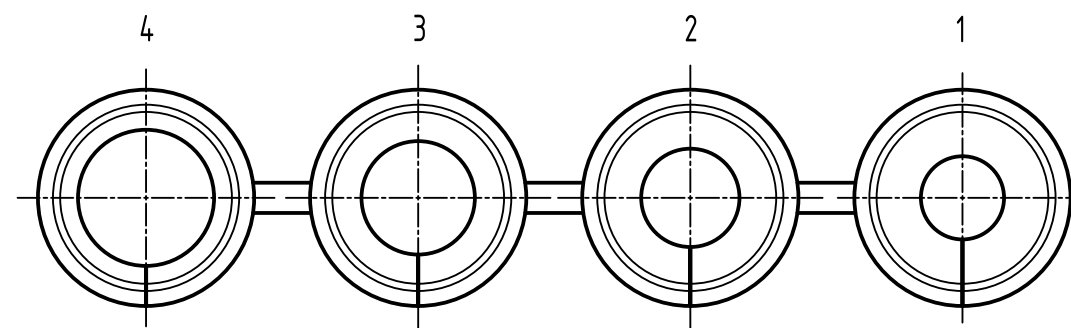
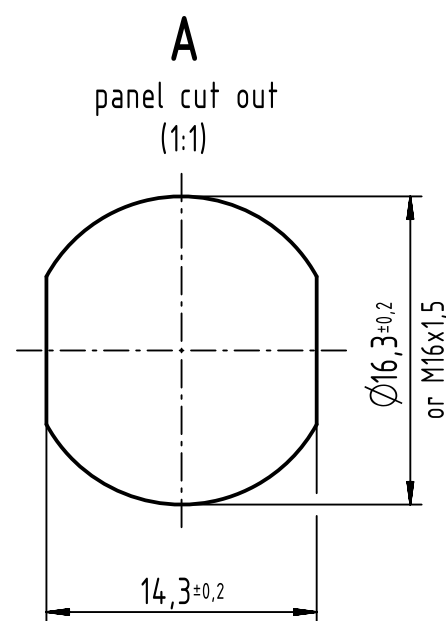
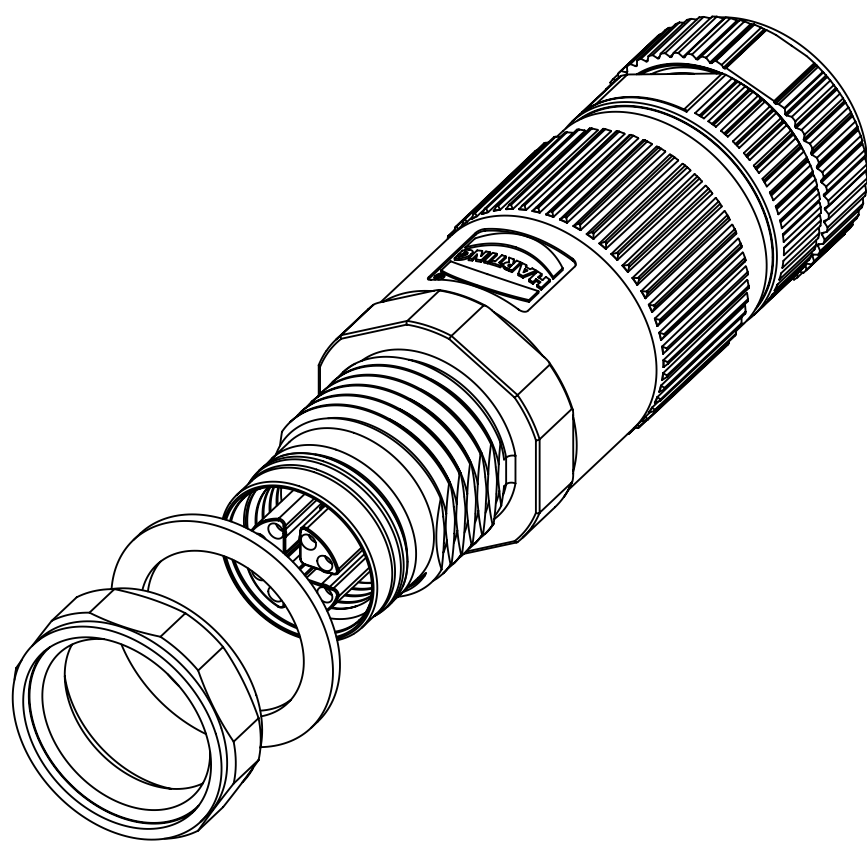
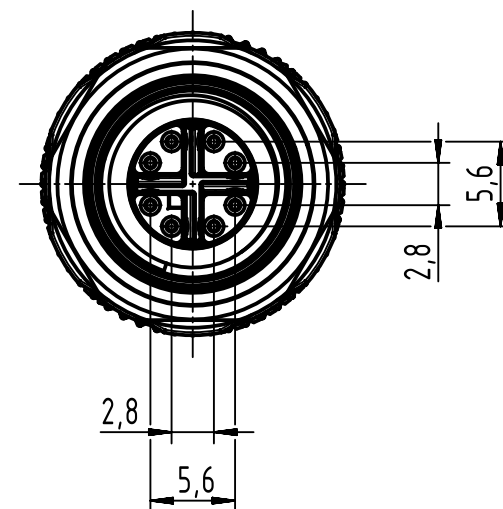


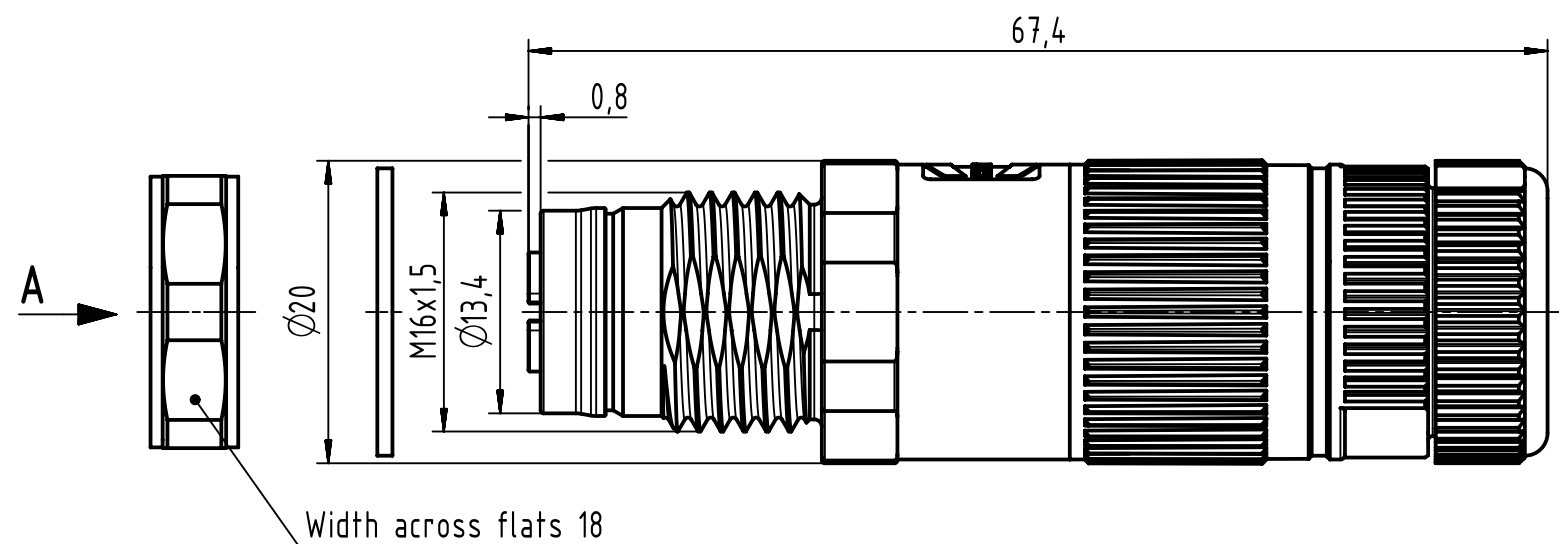


Sealing (1) - cable diameter 5.0-6.5 mm
 Sealing (2) - cable diameter 6.0-7.5 mm
 Sealing (3) - cable diameter 7.5-8.5 mm
 Sealing (4) - cable diameter 8.5-9.5 mm

This set includes the shown M12 enclosure parts and the M12 insert.

Usable preLink termination blocks are:

- 20 82 000 0001 (8-pole AWG 22/23, yellow)
- 20 82 000 0003 (8-pole AWG 26/27, transparent)
- 20 82 000 0005 (XL) (4-pole AWG 22/23, black)

Depending of the used data cable the copper foil p/n 0945 800 0200 can be useful.

	All Dimensions in mm Original Size DIN A3		Scale 2:1	Free size tol.		Ref.
	All rights reserved		Created by BALSAN	Inspected by PRIESTER	Standardisation HOFFMANN	Sub.
Department EL PD		Title preLink M12 cable jack X-cod. 8-pole		Date 2019-05-14	State Final Release	
HARTING Electronics GmbH D-32339 Espelkamp		Type TB	Number 20820062001		Doc-Key / ECM-Nr. 100726741/UGD/000/C 500000151156	Page 1/1