



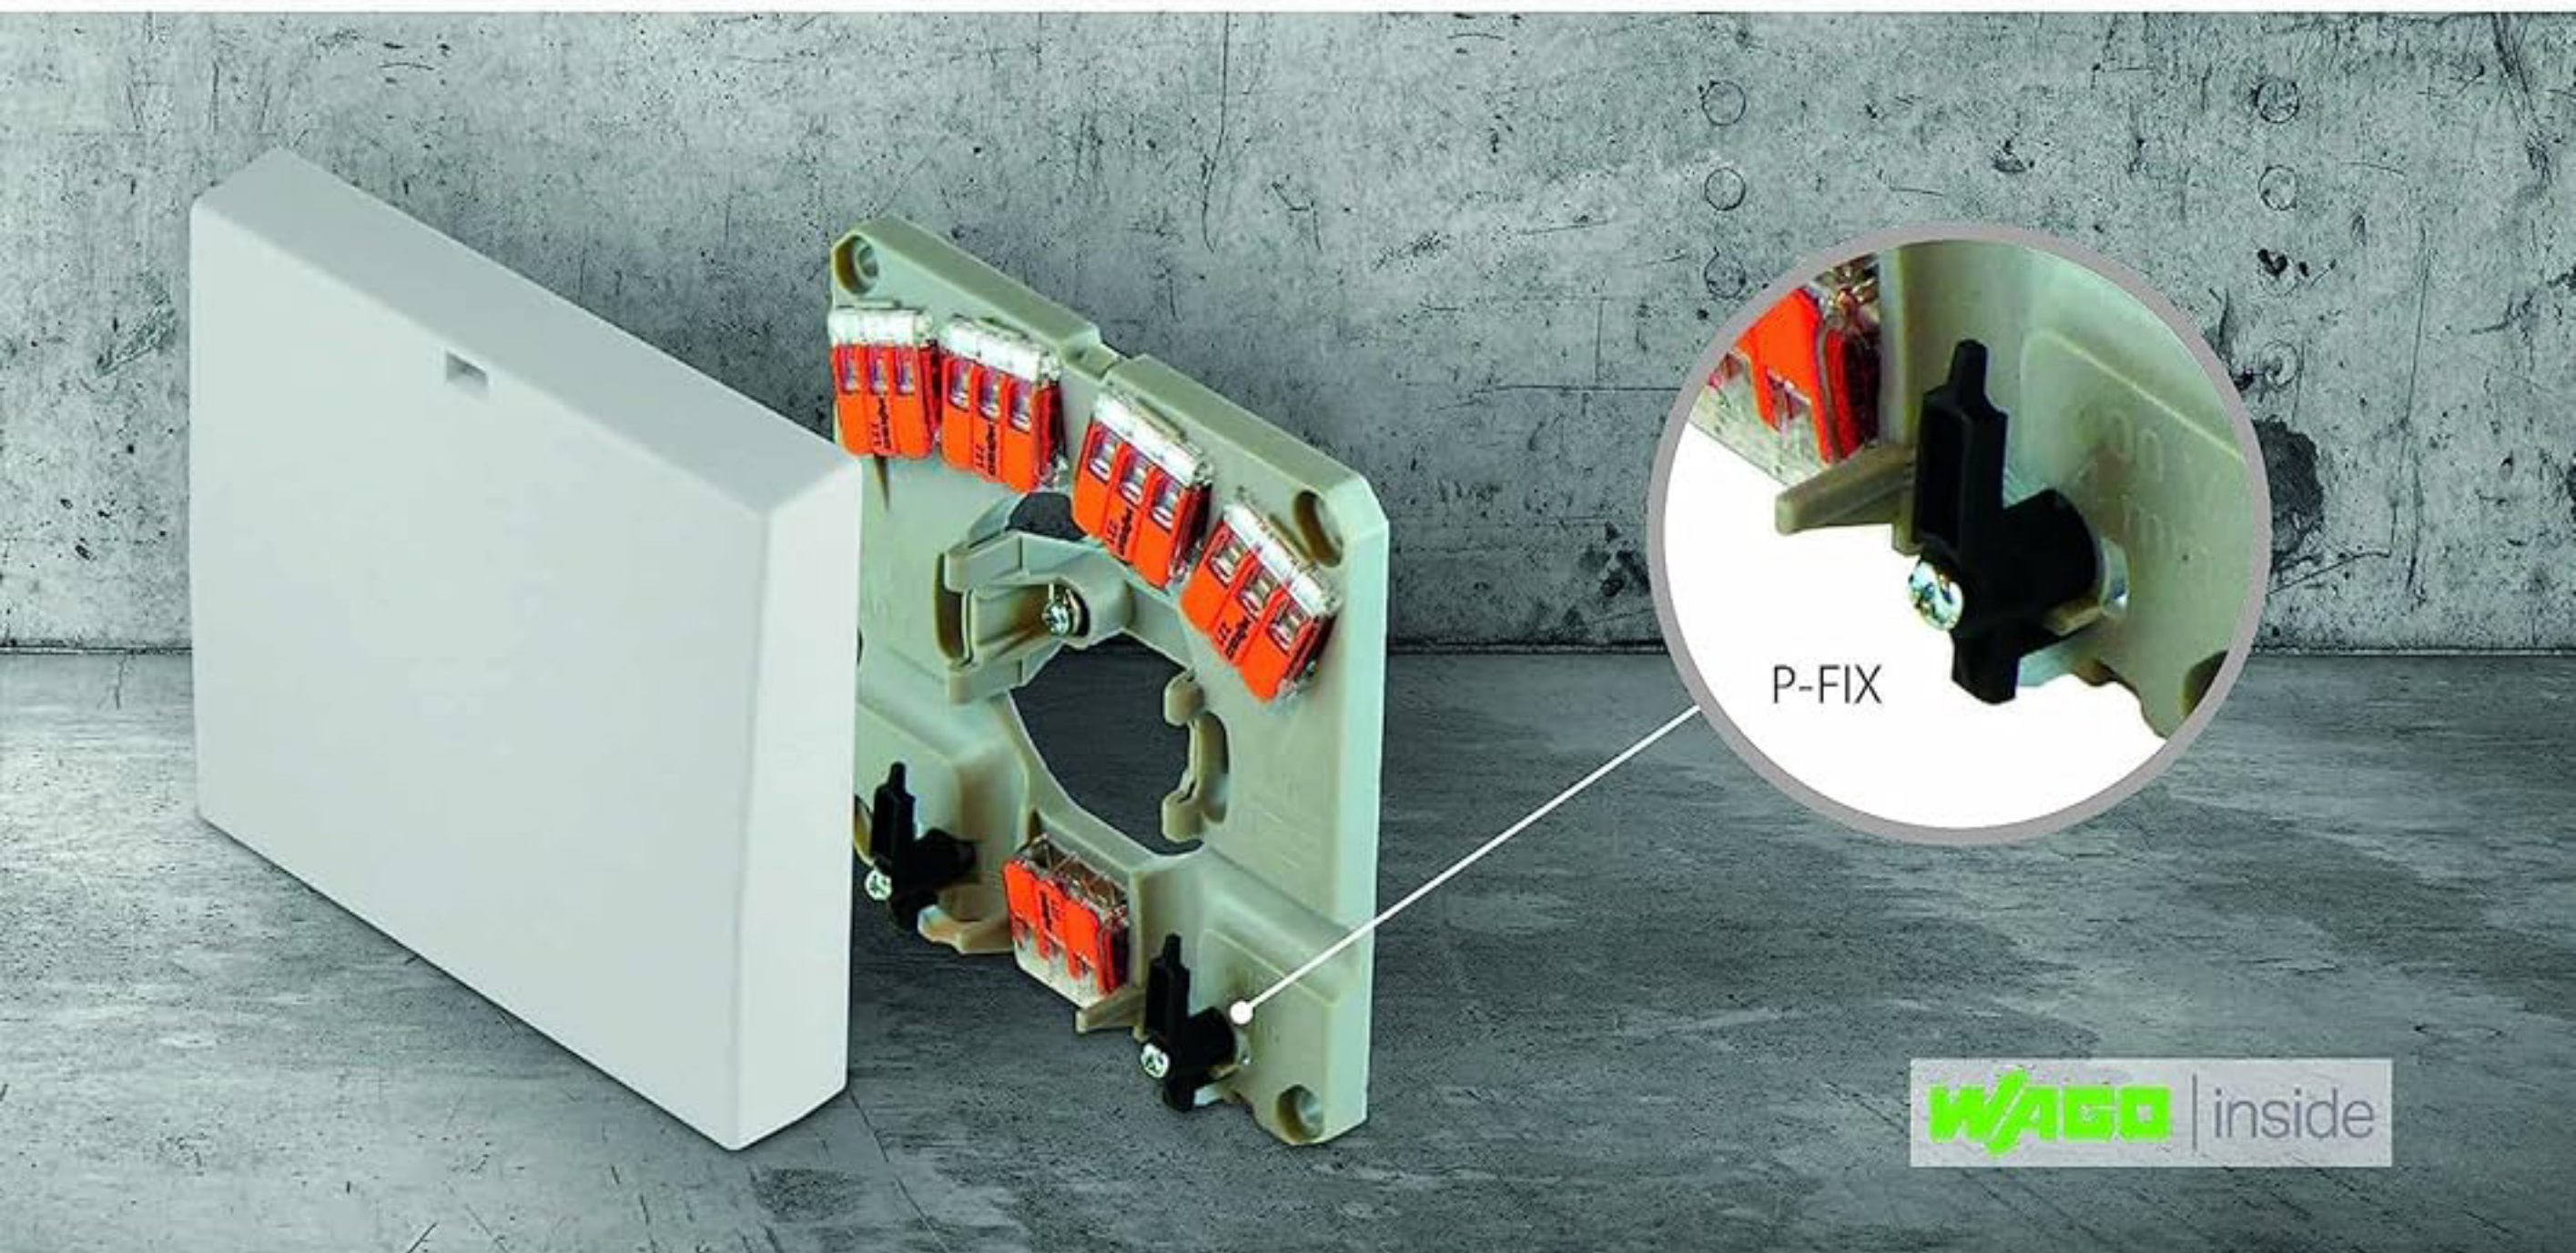

WAGO | inside

HAD 4-S

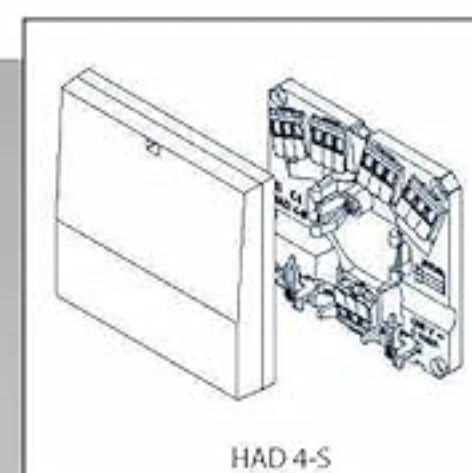

HAD 4-S

Herdanschlussdose HAD 4-S Anwendung Auf- und Unterputz, IP 20

- Schraubenlose Klemmstellen bis 6 mm² Rundleiter
- P-FIX – schwenkbare Zugentlastung (Lieferzustand offen)
- Doppel-Kabelabgang (5 × 2,5 mm², 3 × 4 mm²)
- Schnappdeckel

connection box HAD 4-S surface und flush mounting, IP 20

- screwless terminals rated 6 mm² solid
- P-FIX – hinged strain relief (delivered open)
- two-way cable outlet (5 × 2,5 mm², 3 × 4 mm²)
- snap-on cover

boîtes de raccordement HAD 4-S montage saillie et encastré, IP 20

- bornes sans vis jusqu' à 6 mm² rigide
- P-FIX – serre-câble pivotant (ouvert à la livraison)
- double sortie de câble (5 × 2,5 mm², 3 × 4 mm²)
- couvercle clipsé

Produktbezeichnung
description
description du produit

HAD 4-S

Artikel-Nr.
code no.
N° article

304 01 24

VPE
p.u.
unité

1

Querschnitt
cross section
section

5 × 2,5 mm², 3 × 4 mm²