

O-Ring

3xx G

O-Ring

Nitrilkautschuk NBR

Eigenschaften


Temperaturbereich

- zur besseren Abdichtung am Anschlussgewinde
- ozon-geprüft

-30 °C
+100 °C

Hinweis

montierter O-Ring ermöglicht höhere Schutzart

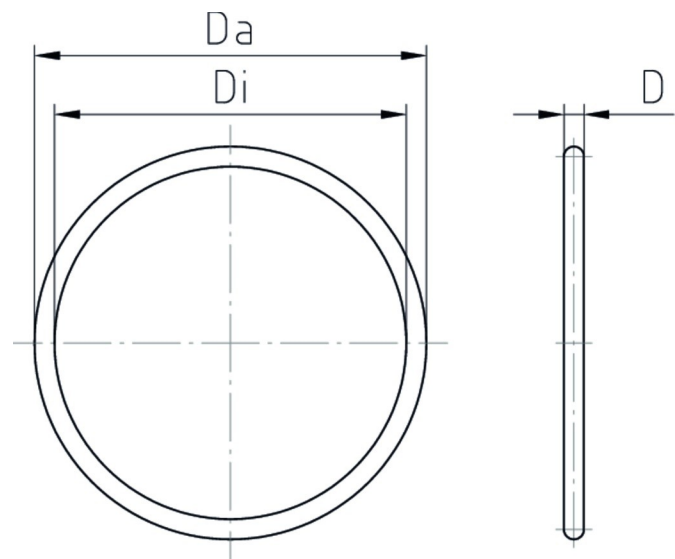

Merkmale

Größe	D	Da	Di	 VPE	Art.-Nr.
Pg 7	1,5	13	10	100	307 G
Pg9	1,5	16	13	100	309 G/1.5
Pg 9	2	17	13	100	309 G
Pg 11	1,5	19	16	100	311 G/1.5
Pg 11	2	20	15	100	311 G
Pg 13,5	1,5	21	18	100	313 G/1.5
Pg 13,5	2	22	18	100	313 G
Pg 16	1,5	23	20	50	316 G/1.5
Pg 16	2	24	20	50	316 G
Pg 21	1,5	27	24	50	321 G/1.5
Pg 21	2	28	24	50	321 G
Pg 29	2	37	33	25	329 G
Pg 36	2,5	47	42	10	336 G
Pg 42	2,5	53	48	5	342 G

Größe	D	Da	Di	 VPE	Art.-Nr.
Pg 48	3	60	54	5	348 G

Auf Anfrage auch als Dichteinsatz Ethylen-Propylenkautschuk EPDM oder Fluorkautschuk FKM