


wall mounting socket outlet - INNOLINQ lead-free, with QUICK-CONNECT

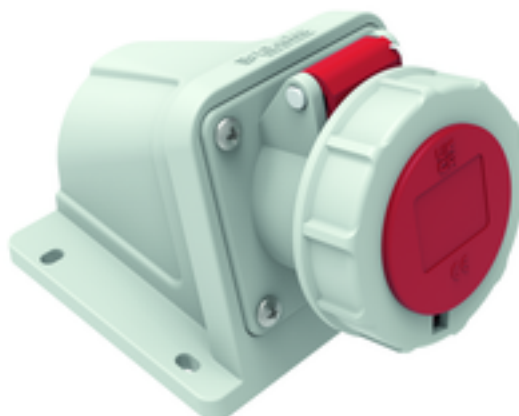

Product description	
BALS-Prd.-Nr	112014
EAN	4024941440691
Product category	Wall mounting socket outlet INNOLINQ QC
Current	16A
Number of poles	4p
Arrangement of phases	3P+PE
Position of earth contact	6 h
Voltage	380 - 415V~

Product description	
Frequency	50/60Hz
Protection degree	IP67/69
Colour code	red RAL 3000
Colour of appliance	Enclosure grey RAL 7035, Collar grey RAL 7035, Hinged lid red RAL 3000, Bayonet ring grey RAL 7035
Connection design	screwless spring terminals with Kontex-Kontakt
Maximum conductor size	4,0 qmm
Cable entry	top entry M25
Height	106mm
Width	115mm
Depth	154mm
Dimension of enclosure	110x115 mm (HxW)
Material of enclosure	Polyamide
Contacts	The contact carrier is made of polyamide, The contacts are brass

Additional technical properties	
	This product is without any lead, The cable entry is one at top open

