


Article-No: 9128630

Surface Luminaires

## KATLA SKII REMADE DALI 1745mm PCO 1x39W 120°wide 4600lm



The first industrial luminaire with 100% recycled plastics. Sustainable damp proof surface luminaire with REMADE luminaire housing. (Recyclat made of post-industrial and post-consumer waste). IPP ? Dense, thanks to ageing resistant seals. Comfortable and fast installation due to 2 spacious rooms of power supply and easy mounting due to variable mounting distances thanks to the PRACHT-CLIP-SYSTEM made of stainless steel. With highly efficient LEDs, wide angled light distribution with ceiling illumination. Screwed together components ? therefore sustainably exchangeable. Suitable for ceiling and horizontal wall mounting, accessories for pendant and mounting rail installation available for order. Attention: PRACHT MANUFACTORY! Do you need a different color temperature, housing color or through-wiring? Specific challenges? No problem. We deliver customized solutions.

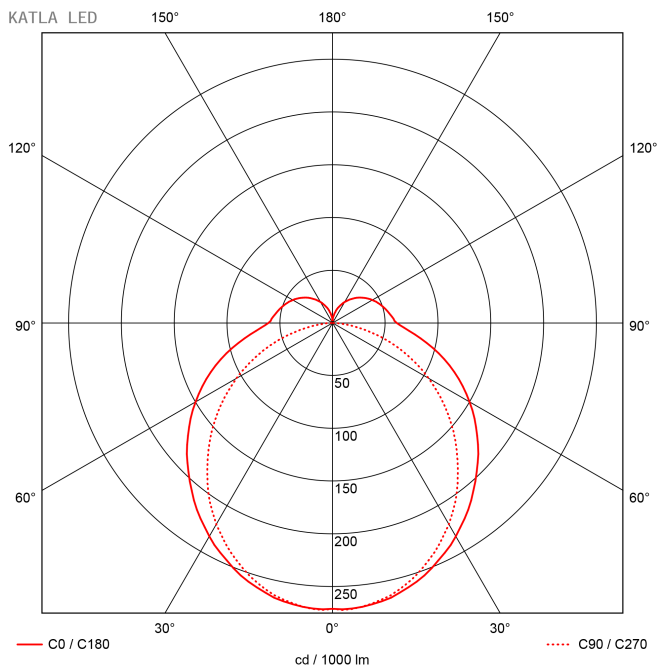

EAN 4018098352600

Statistical product number 94054039

## LAMP

Product type	LED
Number of lamps /LED-rows	1
Color temperature K	4.000
Color rendering index	>90
Amount LED	240
Color tolerance (initial MacAdam)	4

## POWER

Luminous flux lm	4600
Systempower W	39
Efficacy lm/W	118

## LIGHT ENGINEERING

Light distribution	wide beam
Light distribution angle in °	120
Unified Glare Rating UGR 4H 8H C0 C90	24,9 / 24,2

## TECHNICAL DATA

Nominal voltage	220-240V 0/50/60 Hz
Protection class SK	II
Ballast	LED-converter DIM DALI
Through-wiring mm <sup>2</sup>	2x1,5+2x1,5
Glow wire test	850 °C - 5 sec.
D-rating	yes
Type of voltage	AC/DC
Circuit breaker B10A	8
Circuit breaker B16A	15
Circuit breaker C10A	15
Circuit breaker C16A	25
Voltage spike protection U (L-N)	4
Voltage spike protection U (L-PE)	4

## CAPACITY

IK-Impact resistance	07
Warranty (years)	5
L80/B10 Lebensdauer bei 25°C	64000
L70/B50 Life expectancy at 25°C	70000
Unprotected outdoor areas	not suitable
max. lowest temperature in °C	-25
max. highest temperature in °C	35
Ingress protection class	66
Agricultural use	unsuitable

## DIMENSIONS AND WEIGHT

Length mm	1745
Width mm	59
Height mm	62
Weight netto in kg	1.5

## PACKAGING

Length m VPE	1.75
Width VPE in m	0.068
Height VPE in m	0.072
Weight incl. packaging kg	1.7

## ASSEMBLY AND MAINTENANCE

Standard installation	Ceiling, horizontal wall
Optional installation	Pendulum, Rail installation
exchangeable LED board	possible

## MATERIAL

Case color	opal
Renewable resources possible	no
Housing material	Recyclat
Cover material	PC-OPAL Recyclat

*The right of error and later technical developments is reserved.  
State: 14.05.2020*