



Article-No: 9128639

Surface Luminaires

KATLA SKII REMADE DALI 1465mm PCO 1x37W 120°wide 4300lm

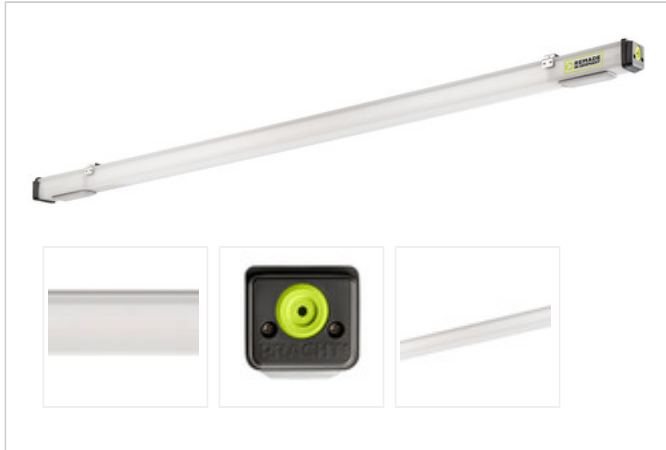

The first industrial luminaire with 100% recycled plastics. Sustainable damp proof surface luminaire with REMADE luminaire housing. (Recyclat made of post-industrial and post-consumer waste). IPP ? Dense, thanks to ageing resistant seals. Comfortable and fast installation due to 2 spacious rooms of power supply and easy mounting due to variable mounting distances thanks to the PRACHT-CLIP-SYSTEM made of stainless steel. With highly efficient LEDs, wide angled light distribution with ceiling illumination. Screwed together components ? therefore sustainably exachangeable. Suitable for ceiling and horizontal wall mounting, accessories for pendant and mounting rail installation available for order. Attention: PRACHT MANUFACTORY! Do you need a different color temperature, housing color or through-wiring? Specific challenges? No problem. We deliver customized solutions.

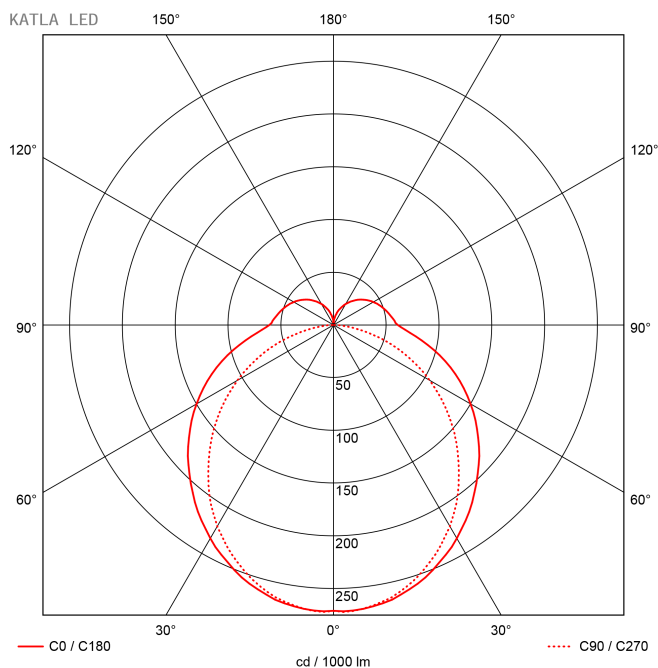

EAN	4018098352587
-----	---------------

Statistical product number	94054039
----------------------------	----------

LAMP

Product type	LED
Number of lamps /LED-rows	1
Color temperature K	4.000
Color rendering index	>90
Amount LED	192
Color tolerance (initial MacAdam)	4

POWER

Luminous flux lm	4300
Systempower W	37
Efficacy lm/W	116

LIGHT ENGINEERING

Light distribution	wide beam
Light distribution angle in °	120
Unified Glare Rating UGR 4H 8H C0 C90	25,5 / 24,7

TECHNICAL DATA

Nominal voltage	220-240V 0/50/60 Hz
Protection class SK	II
Ballast	LED-converter DIM DALI
Through-wiring mm²	2x1,5+2x1,5
Glow wire test	850 °C - 5 sec.
D-rating	yes
Type of voltage	AC/DC
Circuit breaker B10A	8
Circuit breaker B16A	15
Circuit breaker C10A	15
Circuit breaker C16A	25
Voltage spike protection U (L-N)	4
Voltage spike protection U (L-PE)	4

CAPACITY

IK-Impact resistance	07
Warranty (years)	5
L80/B10 Lebensdauer bei 25°C	62000
L70/B50 Life expectancy at 25°C	70000
Unprotected outdoor areas	not suitable
max. lowest temperature in °C	-25
max. highest temperature in °C	35
Ingress protection class	66
Agricultural use	unsuitable

DIMENSIONS AND WEIGHT

Length mm	1465
Width mm	59
Height mm	62
Weight netto in kg	1.3

PACKAGING

Length m VPE	1.505
Width VPE in m	0.068
Height VPE in m	0.072
Weight incl. packaging kg	1.5

ASSEMBLY AND MAINTENANCE

Standard installation	Ceiling, horizontal wall
Optional installation	Pendulum, Rail installation
exchangeable LED board	possible

MATERIAL

Case color	opal
Renewable resources possible	no
Housing material	Recyclat
Cover material	PC-OPAL Recyclat

The right of error and later technical developments is reserved.

State: 14.05.2020