

Brillant 1504 ... 1804 LED CG-S

Exit Sign Panel Luminaires



Brillant 1504 ... 1804 LED CG-S

- Exit sign panel luminaire in LED technology
- Special LED converter, with integrated monitoring module for single luminaire monitoring
- Minimum service requirement due to high service life of the LEDs (up to 50,000 hours)
- Shortened inspection effort due to CEWA GUARD technology
- Automatic function monitoring of up to 20 luminaires per circuit
- Reduced installation expenditures by STAR technology
- Freely programmable mixed operation of the switching modes per luminaire in one circuit

1504 LED CG-S



1604 LED CG-S



1704 LED CG-S



1804 LED CG-S




Viewing distance	28 m
Luminous flux Φ_E/Φ_N at the end of rated operating time	100 %
Housing material	Aluminium, sheet steel
Weight incl. panel	2.7 kg (1504 LED CG-S) 2.5 kg (1604 LED CG-S) 2.2 kg (1704 LED CG-S) 3.3 kg (1804 LED CG-S)
Housing colour	White
Type of mounting	Wall mounting (1504 LED CG-S, 1604 LED CG-S) Ceiling surface, suspended, chain mounting (1704 LED CG-S) Ceiling recessed mounting (1804 LED CG-S)
Connection terminals	Plug in terminals 2.5 mm ²
Connection voltage	220 – 240 V AC, 50/60 Hz 176 – 275 V DC
Current consumption - battery operation (220 V)	17 mA
Power consumption mains operation (apparent power / effective power)	7.1 VA / 4.1 W
Inrush current	1.5 A
Permissible ambient temperature	-10 °C to +40 °C
Light source	LED batten

Ordering details

Type	Scope of supply	Order No.
1504 LED CG-S	Panel luminaire with CEWA GUARD monitoring and 20 digit address switches; with wall bracket for parallel wall mounting, without panel; design: white, RAL 9010	40071350903
1604 LED CG-S	Panel luminaire with CEWA GUARD monitoring and 20 digit address switches; with wall bracket, without panel; design: white, RAL 9010	40071350904
1704 LED CG-S	Panel luminaires with CEWA GUARD monitoring and 20 digit address switches; for surface ceiling mounting, suitable for chain and pendant mounting (not included), without panel; design: white, RAL 9010	40071350905
1804 LED CG-S	Panel luminaires with CEWA GUARD monitoring and 20 digit address switches; for recessed ceiling mounting, without panel; design: plastic shield white, RAL 9010	40071350678

Please note: Phase-out in Q4-2021!

Panel PL/PR




Ordering details

Type	Scope of supply	Order No.
Panel PL/PR acc. to ISO 7010	Two-sided pictogram panel	40071354630
Panel PU/PU acc. to ISO 7010	Two-sided pictogram panel	40071354631
Panel PU/BL acc. to ISO 7010	Two-sided pictogram panel	40071354632


Ordering details

Type	Order No.
Bezel for 1804	metal shield white, RAL 9010
Concrete mounting box for 1804 ...	for installation in concrete ceilings
Mounting kit for 1804 ...	for installation in concrete recessing box
Suspension set 0.5 m	white canopy and aluminium pendulum tube
Suspension set 1.5 m	white canopy and aluminium pendulum tube
Chain suspension metal	Chain fastening for 1704


Please note: Phase-out in Q4-2021!

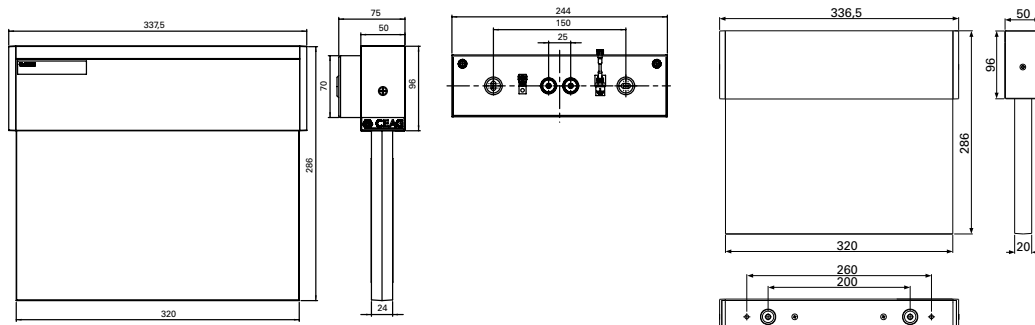


1504 LED CG-S

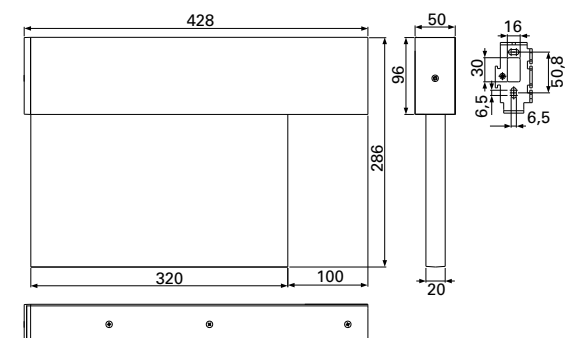

1604 LED CG-S



1704 LED CG-S

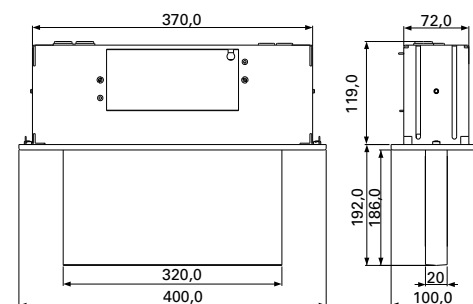

1804 LED CG-S

Ceiling cut-out
387^(+2.5) x 75^(+2.5)