
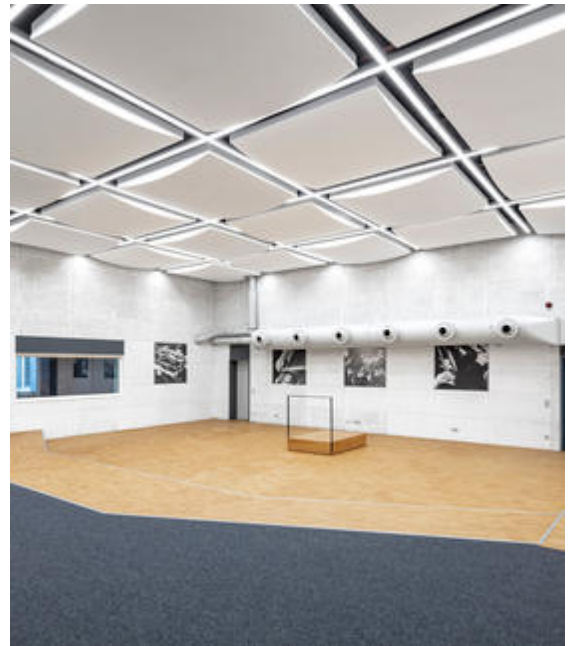


## Matric-A3

Surface mounted light-line - Direct light distribution

Article code: LA3OEL-830H-L1475

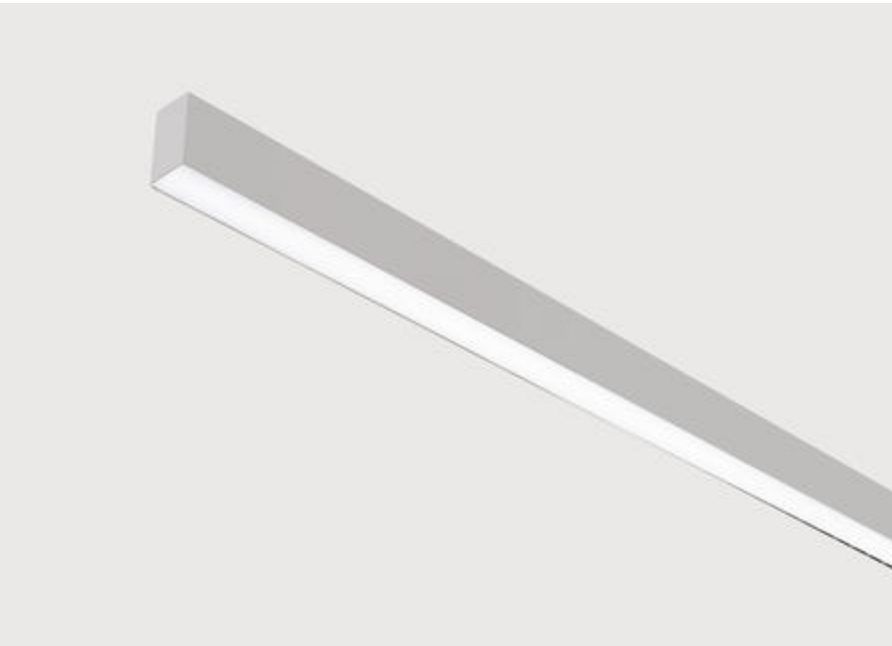

Illustrations may only be similar and serve as an orientation.

Matric-A3. LED. Wall or ceiling mounted light-line.  
Luminaire body made of high-quality aluminum profile.  
Surface finish Silver Anodised. Direct only light distribution.  
Colour temperature: 3000K (Warm White). Colour  
Rendering Index (CRI): >80. Opal diffuser for enhanced  
light transmission and perfect uniform illumination.  
Dimmable DALI. LxWxH (rectangular). L=1475mm. W=  
55mm. H=75mm. High-power

current. 4189lm. 37W. 3,7kg. Binning initial <= MacAdam 3.  
IP20. Protection class I. CE, UKCA marking. Prüfzeichen:  
ENEC. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous  
flux reduction up to 0,4%/1.000 operating hours. Nominal  
failure rate: 0,2%/1.000 operating hours. L80B10 (tq 25°C) =  
50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO  
9001:2015 certificated

## Matric-A3

Surface mounted light-line - Direct light distribution

Article code: LA3OEL-830H-L1475

Customer / Project: \_\_\_\_\_

Note: \_\_\_\_\_

Productname	Matric-A3
Lamp	LED
Installation Type	Surface mounted light-line
Surface finish	Silver Anodised
Light characteristics	Direct light distribution
Colour temperature	3000K
Colour Rendering Index (CRI)	CRI>80
Optical system	Opal diffuser
Control	Dimmable (DALI)
Length L/Diameter D (mm)	L=1475mm
Width W (mm)	W=55mm
Height H (mm)	H=75mm
Current/Power	High-Power
Luminous Flux	4189lm
Power consumption	37W
Degree of protection	IP20
Certification	Prüfzeichen: ENEC
LED lifetime	L80B10 (tq 25°C) = 50.000h
Photometric code	8 30 / 3 3 9
Photobiological class	RG0 (EN62471)
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (kg)	3,7kg

