
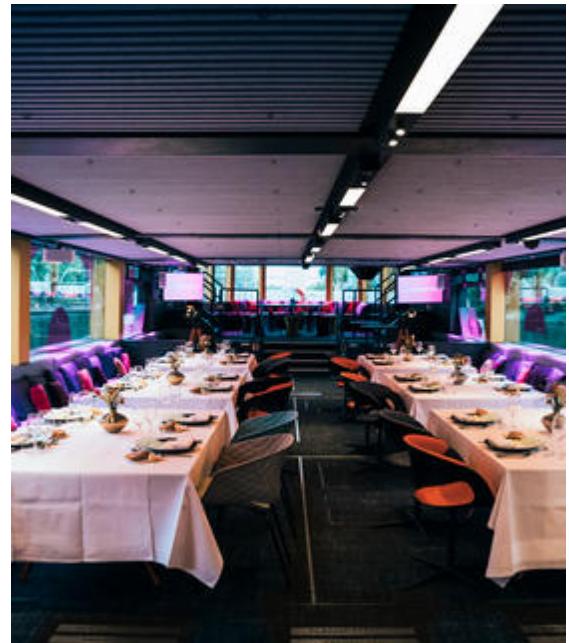


Matric-A5

Surface mounted light-line - Direct light distribution

Article code: LA5OEE-830M-L1182

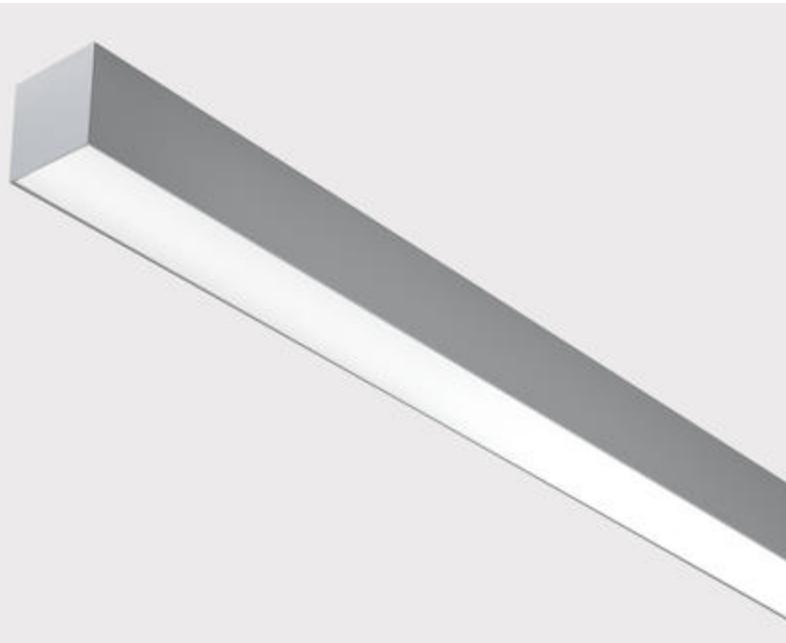

Illustrations may only be similar and serve as an orientation.

Matric-A5. LED. Wall or ceiling mounted light-line.
Luminaire body made of high-quality aluminum profile.
Surface finish Silver Anodised. Direct only light distribution.
Colour temperature: 3000K (Warm White). Colour
Rendering Index (CRI): >80. Opal diffuser for enhanced
light transmission and perfect uniform illumination.
Switchable. LxWxH (rectangular). L=1182mm. W=81mm.
H=81mm. Medium-power current.

3086lm. 26W. 4kg. Binning initial <= MacAdam 3. IP20.
Protection class I. CE, UKCA marking. Prüfzeichen: ENEC.
IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux
reduction up to 0,3%/1.000 operating hours. Nominal failure
rate: 0,2%/1.000 operating hours. L85B10 (tq 25°C) =
50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO
9001:2015 certificated

lightnet

Matric-A5


Surface mounted light-line - Direct light distribution

Article code: LA5OEE-830M-L1182

Customer / Project: _____

Note: _____

Productname	Matric-A5
Lamp	LED
Installation Type	Surface mounted light-line
Surface finish	Silver Anodised
Light characteristics	Direct light distribution
Colour temperature	3000K
Colour Rendering Index (CRI)	CRI>80
Optical system	Opal diffuser
Control	Switchable
Length L/Diameter D (mm)	L=1182mm
Width W (mm)	W=81mm
Height H (mm)	H=81mm
Current/Power	Medium-Power
Luminous Flux	3086lm
Power consumption	26W
Degree of protection	IP20
Certification	Prüfzeichen: ENEC
LED lifetime	L85B10 (tq 25°C) = 50.000h
Photometric code	8 30 / 3 3 9
Photobiological class	RG0 (EN62471)
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (kg)	4kg

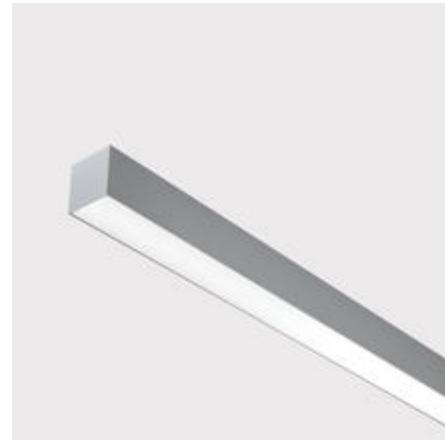

IP20 -220V 50-60 Hz IK 02 RG0 ≤3 LOW POWER MEDIUM POWER HIGH POWER CE UKCA

