


## Matric-AX

Surface mounted light-line - Direct light distribution

Article code: LAXGEE-830M-L890

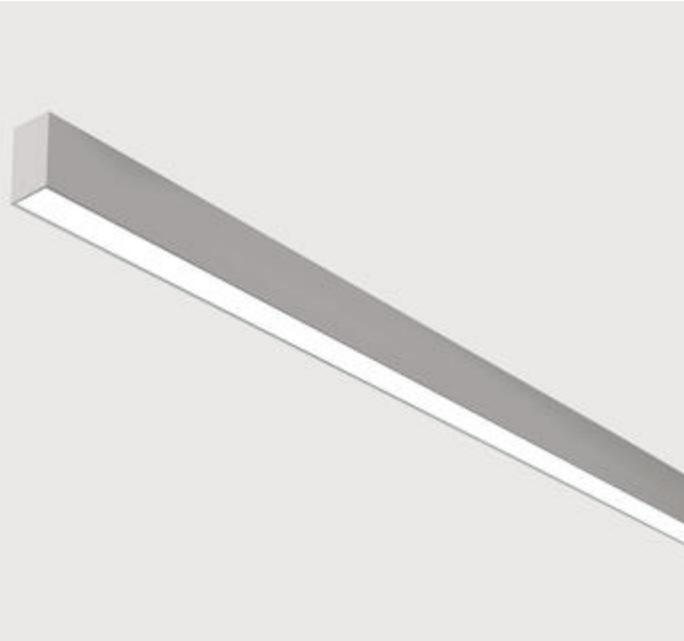

Illustrations may only be similar and serve as an orientation.

Matric-AX. LED. Wall or ceiling mounted light-line.  
Luminaire body made of high-quality aluminum profile.  
Surface finish Silver Anodised. Direct only light distribution.  
Colour temperature: 3000K (Warm White). Colour  
Rendering Index (CRI): >80. Wall-Washer for asymmetrical  
light distribution. Switchable. LxWxH (rectangular). L= 890mm. W=40mm. H=65mm. Medium-power current.  
1178lm. 15W. 1,9kg. Binning

initial <= MacAdam 3. IP20. Protection class I. CE, UKCA  
marking. Prüfzeichen: ENEC. IK02. 220-240V. 50-60 Hz. RG0  
(EN62471). Luminous flux reduction up to 0,3%/1.000  
operating hours. Nominal failure rate: 0,2%/1.000 operating  
hours. L85B10 (tq 25°C) = 50.000h. 5 years warranty.  
Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated

# lightnet

## Matric-AX


Surface mounted light-line - Direct light distribution

Article code: LAXGEE-830M-L890

Customer / Project: \_\_\_\_\_

Note: \_\_\_\_\_

Productname	Matric-AX
Lamp	LED
Installation Type	Surface mounted light-line
Surface finish	Silver Anodised
Light characteristics	Direct light distribution
Colour temperature	3000K
Colour Rendering Index (CRI)	CRI>80
Optical system	Wall-Washer
Control	Switchable
Length L/Diameter D (mm)	L=890mm
Width W (mm)	W=40mm
Height H (mm)	H=65mm
Current/Power	Medium-Power
Luminous Flux	1178lm
Power consumption	15W
Degree of protection	IP20
Certification	Prüfzeichen: ENEC
LED lifetime	L85B10 (tq 25°C) = 50.000h
Photometric code	8 30 / 3 3 9
Photobiological class	RG0 (EN62471)
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (kg)	1,9kg

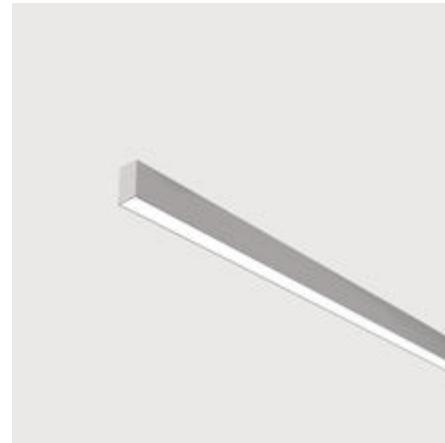

IP20 ~220-240V 50-60Hz IK02 RG0  $\leq 3$  MEDIUM POWER L85B10 50.000h HIGH POWER L80B10 50.000h CE UKCA

