

Basic-X1


Surface mounted luminaire - Direct/indirect light distribution



Illustrations may only be similar and serve as an orientation.

Basic-X1. LED. Wall or ceiling mounted luminaire. Luminaire body with distance-spacer. Luminaire body made of high-quality aluminum profile. Surface finish Radiant Silver. Direct light distribution and indirect lighting corona. Colour temperature: 4000K (Cool White). Colour Rendering Index (CRI): >80. Microprismatic screen for uniform illumination and reduced luminance in office areas. UGR<=19. Dimmable DALI. DxH (round). D=600mm. H=55+25mm.

Medium-power current. 12900lm. 87W. 7,8kg. Binning initial <= MacAdam 3. Protection class: IP40. Protection class I. CE Declaration of Conformity. ENEC-Certification. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,3%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L85B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated

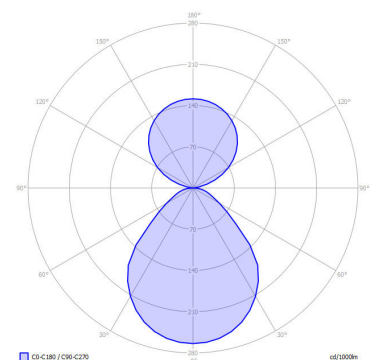

Basic-X1

Surface mounted luminaire - Direct/indirect light distribution

Customer / Project: _____

Note: _____



Productname	Basic-X1	Weight (kg)	7,8kg
Lamp	LED		
Installation Type	Surface mounted luminaire		
Surface finish	Radiant Silver		
Light characteristics	Direct/indirect light distribution		
Colour temperature	4000K		
Colour Rendering Index (CRI)	CRI>80		
Optical system	Microprismatic screen		
Control	Dimmable (DALI)		
Length L/Diameter D (mm)	D=600mm		
Height H (mm)	H=55+25mm		
Current/Power	Medium-Power		
Luminous Flux	12900lm		
Watt	87W		
Degree of protection	IP40		
Certification	ENEC		
LED lifetime	L85B10 (tq 25°C) = 50.000h		
UGR	UGR<=19		
Photometric code	8 40 / 3 3 9		
Photobiological class	RG0 (EN62471)		
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C		

