


Matric-AX

Surface mounted light-line - Direct light distribution

Article code: LAXLEL-840H-L1987-A

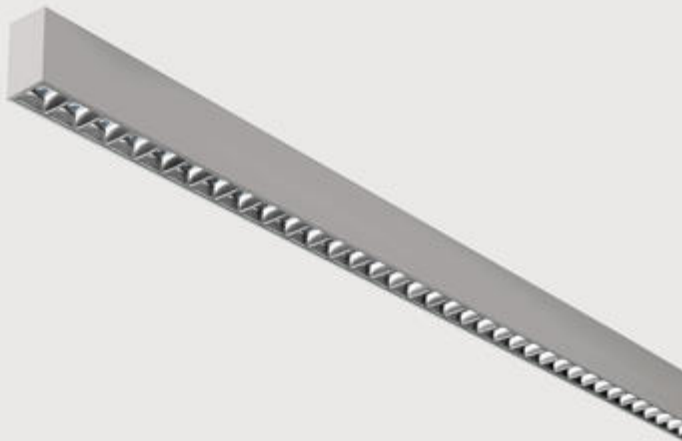

Illustrations may only be similar and serve as an orientation.

Matric-AX. LED. Wall or ceiling mounted light-line.
Luminaire body made of high-quality aluminum profile.
Surface finish Silver Anodised. Direct only light distribution..
~HY Colour temperature: 4000K (Cool White). Colour
Rendering Index (CRI): >80. Lens Louvre: precision lenses with
louvre for wide and symmetrical light distribution. High glare
limitation, compatible for office applications. UGR<=19.
Reflector: Satin Silver. Dimmable DALI. LxWxH

(rectangular). L=1987mm. W=40mm. H=65mm. High-power
current. 6150lm. 47W. 3,7kg. Binning initial <= MacAdam 3.
IP20. Protection class I. CE, UKCA marking. Prüfzeichen:
ENEC. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous
flux reduction up to 0,4%/1.000 operating hours. Nominal
failure rate: 0,2%/1.000 operating hours. L80B10 (tq 25°C) =
50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO
9001:2015 certificated

Matric-AX

Surface mounted light-line - Direct light distribution

Article code: LAXLEL-840H-L1987-A

Customer / Project: _____

Note: _____

Productname	Matric-AX
Lamp	LED
Installation Type	Surface mounted light-line
Surface finish	Silver Anodised
Light characteristics	Direct light distribution
Colour temperature	4000K
Colour Rendering Index (CRI)	CRI>80
Optical system	Lens Louvre
Reflector Colour Inside	Reflector: Satin Silver
Control	Dimmable (DALI)
Length L/Diameter D (mm)	L=1987mm
Width W (mm)	W=40mm
Height H (mm)	H=65mm
Current/Power	High-Power
Luminous Flux	6150lm
Power consumption	47W
Degree of protection	IP20
Certification	Prüfzeichen: ENEC
LED lifetime	L80B10 (tq 25°C) = 50.000h
UGR	UGR<=19
Photometric code	8 40 / 3 3 9
Photobiological class	RG0 (EN62471)
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (kg)	3,7kg

