lightnet

Cubic-F1

Free standing luminaire - Direct/indirect light distribution

Article code: CF1ABX-840H-L900-U-A

Illustrations may only be similar and serve as an orientation.

Cubic-F1. LED. Free standing luminaire. Luminaire head with 25mm minimalist overall height. Luminaire body made of high-quality aluminum profile. Surface finish Jet Black. Direct/indirect light distribution. Colour temperature: 4000K (Cool White). Colour Rendering Index (CRI): >80. Microprismatic screen for uniform illumination and reduced luminance in office areas. UGR<=19. Dimmable. LxWxH (luminaire head, rectangular/Stand). L=900mm. W=200mm. H=2000/25mm. High-power current. 16000lm. 114W. 20,1kg. Binning initial <= MacAdam 3. U-formed floor base matching luminaire`s outer surface colour. Plug Schuko CEE 7/7 (Type E+F). IP20. Protection class I. CE, UKCA marking. IK02. 220-240V. 50-60 Hz. Luminous flux reduction up to 0,4%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L80B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated

© Lightnet GmbH, Zollstockgürtel 65, D-50969 Köln, Tel. +49 (0) 221 22 25 26-0, Fax +49 (0) 221 22 25 26-99, info@lightnet.de, www.lightnet.de
We reserve the right to make mistakes or modifications. Illustrations may only be similar and serve as an orientation. Kindly always check you are working with current version of mounting instruction.

Date: 18.07.2023

lightnet

Cubic-F1

Free standing luminaire - Direct/indirect light distribution

Article code: CF1ABX-840H-L900-U-A

Customer / Project:

Note:

IP20 ~220-240V 50-60 Hz IK 02 ≤3 MacAdam MEDIUM POWER L85B10 50.000h HIGH POWER L80B10 50.000h CE UK CA

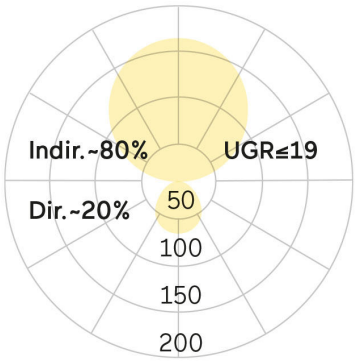

Productname	Cubic-F1
Lamp	LED
Installation Type	Free standing luminaire
Surface finish	Jet Black
Light characteristics	Direct/indirect light distribution
Colour temperature	4000K
Colour Rendering Index (CRI)	CRI>80
Optical system	Microprismatic screen
Control	Separately dimmable
Length L/Diameter D (mm)	L=900mm
Width W (mm)	W=200mm
Height H (mm)	H=2000/25mm
Current/Power	High-Power
Luminous Flux	16000lm
Power consumption	114W
Base-Type	U-base
Plug	Schuko CEE 7/7 (E+F)
Degree of protection	IP20
LED lifetime	L80B10 (tq 25°C) = 50.000h
UGR	UGR<=19
Photometric code	8 40 / 3 3 9
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (kg)	20,1kg

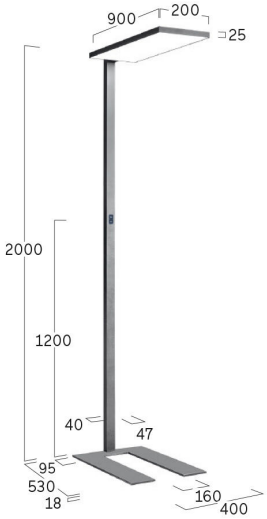

© Lightnet GmbH, Zollstockgürtel 65, D-50969 Köln, Tel. +49 (0) 221 22 25 26-0, Fax +49 (0) 221 22 25 26-99, info@lightnet.de, www.lightnet.de
We reserve the right to make mistakes or modifications. Illustrations may only be similar and serve as an orientation. Kindly always check you are working with current version of mounting instruction.

Date: 18.07.2023