


lightnet

Cubic-F2

Free standing luminaire - Direct/indirect light distribution

Article code: CF2AEM-840M-L600-U-A

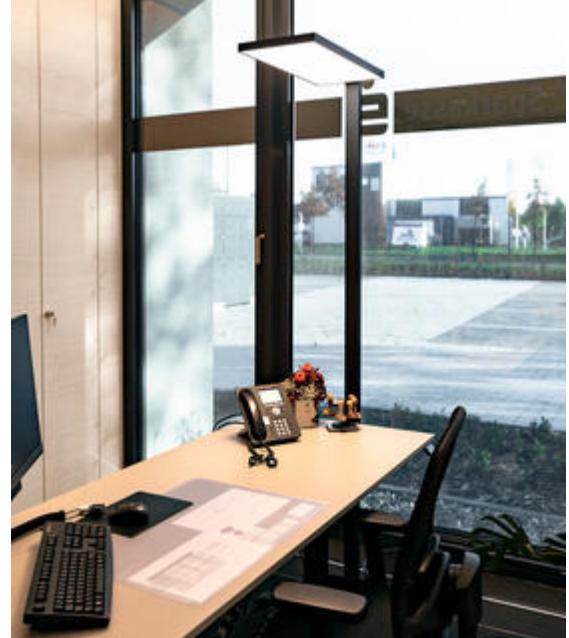

Illustrations may only be similar and serve as an orientation.

Cubic-F2. LED. Free standing luminaire. Luminaire head with 25mm minimalist overall height. Luminaire body made of high-quality aluminum profile. Surface finish Silver Anodised. Direct/indirect light distribution. Colour temperature: 4000K (Cool White). Colour Rendering Index (CRI): >80. Microprismatic screen for reduced luminance in office areas. UGR<=19. Continuously dimmable multisensor as stand-alone-version. LxWxH (luminaire head, rectangular/Stand). L=600mm. W=300mm. H=

2000/25mm. Medium-power current. 11100lm. 68W. 19,5kg. Binning initial <= MacAdam 3. U-formed floor base matching luminaire's outer surface colour. Plug Schuko CEE 7/7 (Type E+F). IP20. Protection class I. CE, UKCA marking. Prüfzeichen: ENEC. IK02. 220-240V. 50-60 Hz. Luminous flux reduction up to 0,3%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L85B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated

lightnet

Cubic-F2

Free standing luminaire - Direct/indirect light distribution

Article code: CF2AEM-840M-L600-U-A

Customer / Project: _____

Note: _____

Productname	Cubic-F2
Lamp	LED
Installation Type	Free standing luminaire
Surface finish	Silver Anodised
Light characteristics	Direct/indirect light distribution
Colour temperature	4000K
Colour Rendering Index (CRI)	CRI>80
Optical system	Microprismatic screen
Control	Dim-Multisensor
Length L/Diameter D (mm)	L=600mm
Width W (mm)	W=300mm
Height H (mm)	H=2000/25mm
Current/Power	Medium-Power
Luminous Flux	11100lm
Power consumption	68W
Base-Type	U-base
Plug	Schuko CEE 7/7 (E+F)
Degree of protection	IP20
Certification	Prüfzeichen: ENEC
LED lifetime	L85B10 (tq 25°C) = 50.000h
UGR	UGR<=19
Photometric code	8 40 / 3 3 9
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (kg)	19,5kg



IP20 ~220-240V 50-60 Hz IK 02 ≤ 3 L85B10 50.000h HIGH POWER UGR B10 CE UKCA EEC

