

Basic-A5


Surface mounted luminaire - Direct light distribution



Illustrations may only be similar and serve as an orientation.

Basic-A5. LED. Surface mounted luminaire for wall or ceiling mounting with minimalist edge. Luminaire body made of high-quality aluminum profile. Surface finish Radiant Silver. Direct only light distribution. Colour temperature: 3000K (Warm White). Colour Rendering Index (CRI): >80. Opal diffuser for enhanced light transmission and perfect uniform illumination. Switchable. DxH (round). D=400mm. H=38mm. Medium-

power current. 1543lm. 12W. 4,3kg. Binning initial <= MacAdam 3. Protection class: IP40. Protection class I. CE Declaration of Conformity. ENEC-Certification. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,3%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L85B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated

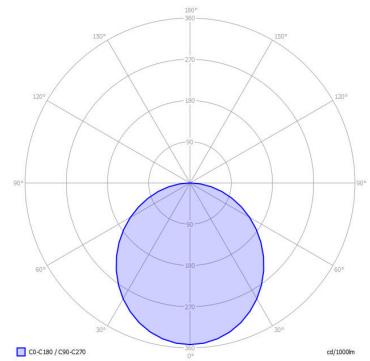

Article code: BA5OSE-830M-D400

Basic-A5

Surface mounted luminaire - Direct light distribution

Customer / Project: _____

Note: _____



IP40  ~220-240V 50-60Hz  IK02 RG0  ≤3  EN62471 MacAdam  CE 

| | |
|------------------------------|--------------------------------|
| Productname | Basic-A5 |
| Lamp | LED |
| Installation Type | Surface mounted luminaire |
| Surface finish | Radiant Silver |
| Light characteristics | Direct light distribution |
| Colour temperature | 3000K |
| Colour Rendering Index (CRI) | CRI>80 |
| Optical system | Opal diffuser |
| Control | Switchable |
| Length L/Diameter D (mm) | D=400mm |
| Height H (mm) | H=38mm |
| Current/Power | Medium-Power |
| Luminous Flux | 1543lm |
| Watt | 12W |
| Degree of protection | IP40 |
| Certification | ENEC |
| LED lifetime | L85B10 (tq 25°C) = 50.000h |
| Photometric code | 8 30 / 3 3 9 |
| Photobiological class | RG0 (EN62471) |
| Indoor/Outdoor | Indoor: ta [ambient] max. 25°C |
| Weight (kg) | 4,3kg |

