


## Cubic-A9

Surface mounted luminaire - Direct light distribution

Article code: CA9OEE-830M-Q400

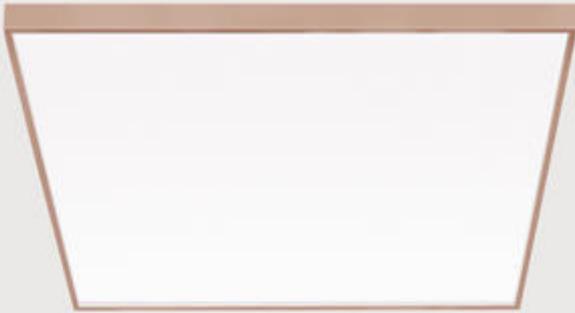

Illustrations may only be similar and serve as an orientation.

Cubic-A9. LED. Surface mounted luminaire for wall or ceiling mounting. Luminaire body made of high-quality aluminum profile. Surface finish Silver Anodised. Direct only light distribution. Colour temperature: 3000K (Warm White). Colour Rendering Index (CRI): >80. Opal diffuser for enhanced light transmission and perfect uniform illumination. Switchable. LxWxH (square). L=400mm. W=400mm. H=35mm. Medium-

power current. 1786lm. 16W. 4,2kg. Binning initial <= MacAdam 3. IP20. Protection class I. CE, UKCA marking. Prüfzeichen: ENEC. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,3%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L85B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated

# lightnet

## Cubic-A9

Surface mounted luminaire - Direct light distribution

Article code: CA9OEE-830M-Q400

Customer / Project: \_\_\_\_\_

Note: \_\_\_\_\_

|                              |                                |
|------------------------------|--------------------------------|
| Productname                  | Cubic-A9                       |
| Lamp                         | LED                            |
| Installation Type            | Surface mounted luminaire      |
| Surface finish               | Silver Anodised                |
| Light characteristics        | Direct light distribution      |
| Colour temperature           | 3000K                          |
| Colour Rendering Index (CRI) | CRI>80                         |
| Optical system               | Opal diffuser                  |
| Control                      | Switchable                     |
| Length L/Diameter D (mm)     | L=400mm                        |
| Width W (mm)                 | W=400mm                        |
| Height H (mm)                | H=35mm                         |
| Current/Power                | Medium-Power                   |
| Luminous Flux                | 1786lm                         |
| Power consumption            | 16W                            |
| Degree of protection         | IP20                           |
| Certification                | Prüfzeichen: ENEC              |
| LED lifetime                 | L85B10 (tq 25°C) = 50.000h     |
| Photometric code             | 8 30 / 3 3 9                   |
| Photobiological class        | RG0 (EN62471)                  |
| Indoor/Outdoor               | Indoor: ta [ambient] max. 25°C |
| Weight (kg)                  | 4,2kg                          |

