


## Cubic-X2

Surface mounted luminaire - Direct/indirect light distribution

Article code: CX2OEL-830H-Q530

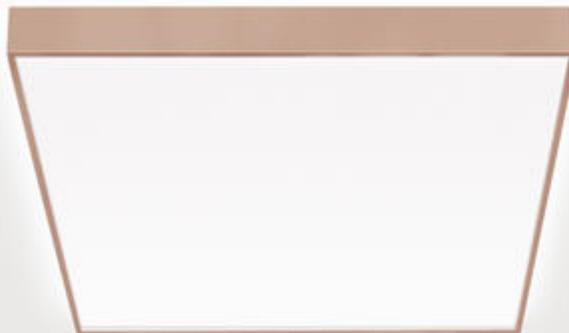

Illustrations may only be similar and serve as an orientation.

Cubic-X2. LED. Wall or ceiling mounted luminaire. Luminaire body with distance-spacer. Luminaire body made of high-quality aluminum profile. Surface finish Silver Anodised. Direct light distribution and indirect lighting corona. Colour temperature: 3000K (Warm White). Colour Rendering Index (CRI): >80. Opal diffuser for enhanced light transmission and perfect uniform illumination. Dimmable DALI. LxWxH (square). L=530mm. W=530mm. H=75mm.

High-power current. 10631lm. 78W. 7,6kg. Binning initial <= MacAdam 3. IP20. Protection class I. CE, UKCA marking. Prüfzeichen: ENEC. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,4%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L80B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated

# lightnet

## Cubic-X2


Surface mounted luminaire - Direct/indirect light distribution

Article code: CX2OEL-830H-Q530

Customer / Project: \_\_\_\_\_

Note: \_\_\_\_\_

Productname	Cubic-X2
Lamp	LED
Installation Type	Surface mounted luminaire
Surface finish	Silver Anodised
Light characteristics	Direct/indirect light distribution
Colour temperature	3000K
Colour Rendering Index (CRI)	CRI>80
Optical system	Opal diffuser
Control	Dimmable (DALI)
Length L/Diameter D (mm)	L=530mm
Width W (mm)	W=530mm
Height H (mm)	H=75mm
Current/Power	High-Power
Luminous Flux	10631lm
Power consumption	78W
Degree of protection	IP20
Certification	Prüfzeichen: ENEC
LED lifetime	L80B10 (tq 25°C) = 50.000h
Photometric code	8 30 / 3 3 9
Photobiological class	RG0 (EN62471)
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (kg)	7,6kg

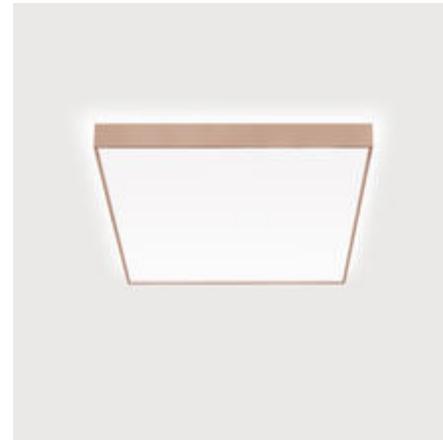

IP20 -220-240V 50-60 Hz IK 02 RG0 ≤3 MEDIUM POWER L80B10 50000h HIGH POWER L80B10 50000h CE UK CA

