


Matric-A3

Surface mounted light-line - Direct light distribution




Illustrations may only be similar and serve as an orientation.

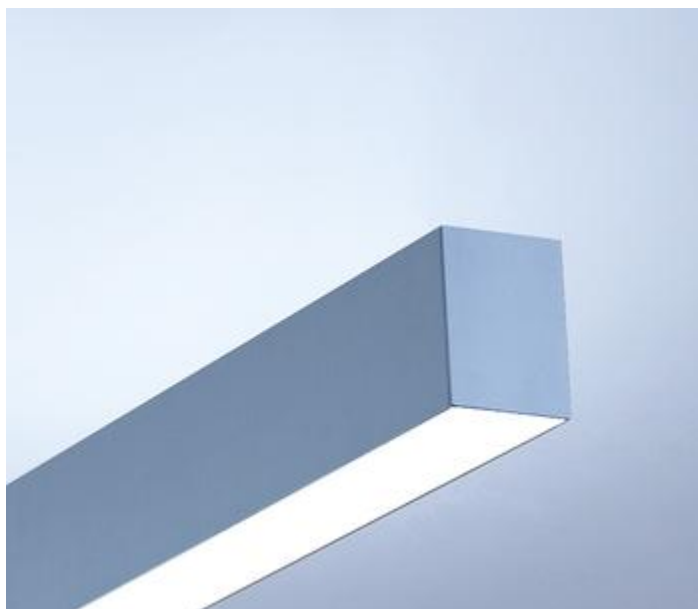

Matric-A3. LED. Wall or ceiling mounted light-line.
Luminaire body made of high-quality aluminum profile.
Surface finish Silver Anodised. Direct only light distribution.
Colour temperature: 4000K (Cool White). Colour
Rendering Index (CRI): >80. Opal diffuser for enhanced
light transmission and perfect uniform illumination.
Switchable. LxWxH (light line). L=1475mm. W=55mm. H=
75mm. Medium-power current. 3470lm.

29W. 3,5kg. Binning initial $\leq$ MacAdam 3. Protection
class: IP20. Protection class I. CE Declaration of
Conformity. IK02. 220-240V. 50-60 Hz. RG0 (EN62471).
Luminous flux reduction up to 0,3%/1.000 operating hours.
Nominal failure rate: 0,2%/1.000 operating hours. L85B10
(t_q 25°C) = 50.000h. 5 years warranty. Manufacturer:
Lightnet GmbH, ISO 9001:2015 certificated

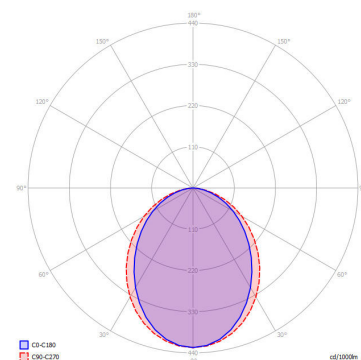


Matric-A3

Surface mounted light-line - Direct light distribution

Customer / Project: _____

Note: _____

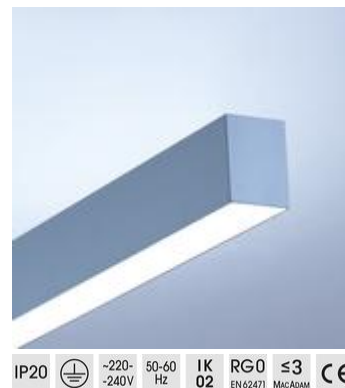

Productname	Matric-A3
Lamp	LED
Installation Type	Surface mounted light-line
Surface finish	Silver Anodised
Light characteristics	Direct light distribution
Colour temperature	4000K
Colour Rendering Index (CRI)	CRI>80
Optical system	Opal diffuser
Control	Switchable
Length L/Diameter D (mm)	L=1475mm
Width W (mm)	W=55mm
Height H (mm)	H=75mm
Current/Power	Medium-Power
Luminous Flux	3470lm
Watt	29W
Degree of protection	IP20
LED lifetime	L85B10 (tq 25°C) = 50.000h
Photometric code	8 40 / 3 3 9
Photobiological class	RG0 (EN62471)
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (kg)	3,5kg

