


## Basic-X1

Surface mounted luminaire - Direct/indirect light distribution

Article code: BX1ASE-840M-D600

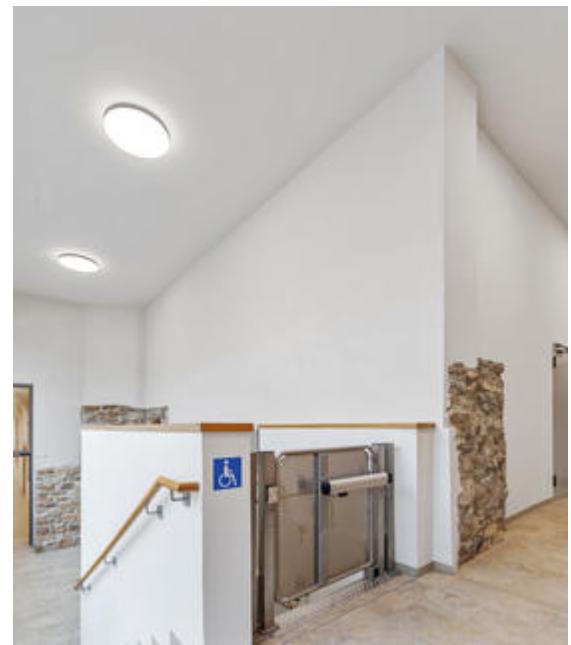

Illustrations may only be similar and serve as an orientation.

Basic-X1. LED. Wall or ceiling mounted luminaire. Luminaire body with distance-spacer. Luminaire body made of high-quality aluminum profile. Surface finish Radiant Silver. Direct light distribution and indirect lightingcorona. Colour temperature: 4000K (Cool White). Colour Rendering Index (CRI): >80. Microprismatic screen for uniform illumination and reduced luminance in office areas. UGR<=19. Switchable. DxH (round). D=600mm. H=55+

25mm. Medium-power current. 12100lm. 80W. 7,8kg. Binning initial <= MacAdam 3. IP40. Protection class I. CE, UKCA marking. Prüfzeichen: ENEC. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,3%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L85B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated

# lightnet

## Basic-X1

Surface mounted luminaire - Direct/indirect light distribution

Article code: BX1ASE-840M-D600

Customer / Project: \_\_\_\_\_

Note: \_\_\_\_\_

Productname	Basic-X1
Lamp	LED
Installation Type	Surface mounted luminaire
Surface finish	Radiant Silver
Light characteristics	Direct/indirect light distribution
Colour temperature	4000K
Colour Rendering Index (CRI)	CRI>80
Optical system	Microprismatic screen
Control	Switchable
Length L/Diameter D (mm)	D=600mm
Height H (mm)	H=55+25mm
Current/Power	Medium-Power
Luminous Flux	12100lm
Power consumption	80W
Degree of protection	IP40
Certification	Prüfzeichen: ENEC
LED lifetime	L85B10 (tq 25°C) = 50.000h
UGR	UGR<=19
Photometric code	8 40 / 3 3 9
Photobiological class	RG0 (EN62471)
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (kg)	7,8kg



IP40 -220-240V 50-60 Hz IK 02 RG0  $\leq 3$  MacAdam LOW POWER L85B10 50.000h MEDIUM POWER L85B10 50.000h CE UKCA EEC

