


lightnet

Cubic-A9

Surface mounted luminaire - Direct light distribution

Article code: CA9AEE-840M-Q400

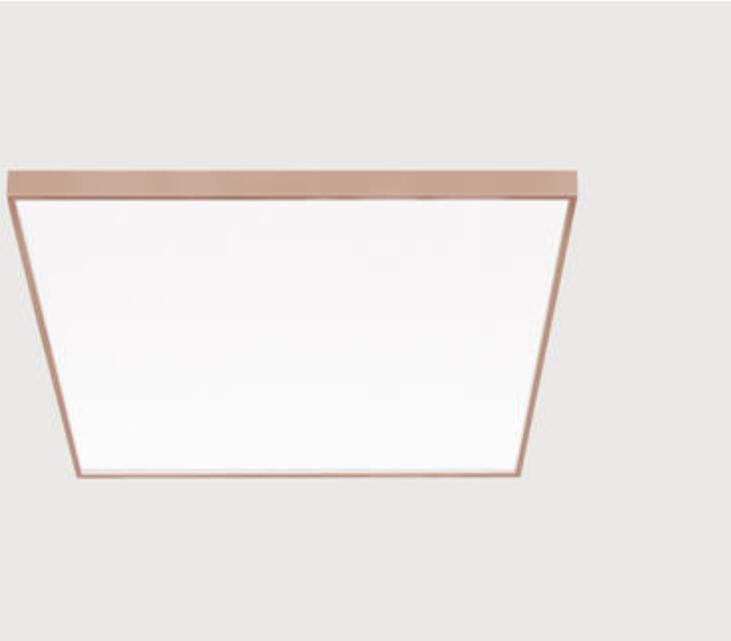

Illustrations may only be similar and serve as an orientation.

Cubic-A9. LED. Surface mounted luminaire for wall or ceiling mounting. Luminaire body made of high-quality aluminum profile. Surface finish Silver Anodised. Direct only light distribution. Colour temperature: 4000K (Cool White). Colour Rendering Index (CRI): >80. Microprismatic screen for uniform illumination and reduced luminance in office areas. UGR<=19. Switchable. LxWxH (square). L=400mm. W=400mm. H=

35mm. Medium-power current. 1960lm. 16W. 4,2kg. Binning initial <= MacAdam 3. IP20. Protection class I. CE, UKCA marking. Prüfzeichen: ENEC. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,3%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L85B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated

lightnet

Cubic-A9


Surface mounted luminaire - Direct light distribution

Article code: CA9AEE-840M-Q400

Customer / Project: _____

Note: _____

Productname	Cubic-A9
Lamp	LED
Installation Type	Surface mounted luminaire
Surface finish	Silver Anodised
Light characteristics	Direct light distribution
Colour temperature	4000K
Colour Rendering Index (CRI)	CRI>80
Optical system	Microprismatic screen
Control	Switchable
Length L/Diameter D (mm)	L=400mm
Width W (mm)	W=400mm
Height H (mm)	H=35mm
Current/Power	Medium-Power
Luminous Flux	1960lm
Power consumption	16W
Degree of protection	IP20
Certification	Prüfzeichen: ENEC
LED lifetime	L85B10 (tq 25°C) = 50.000h
UGR	UGR<=19
Photometric code	8 40 / 3 3 9
Photobiological class	RG0 (EN62471)
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (kg)	4,2kg

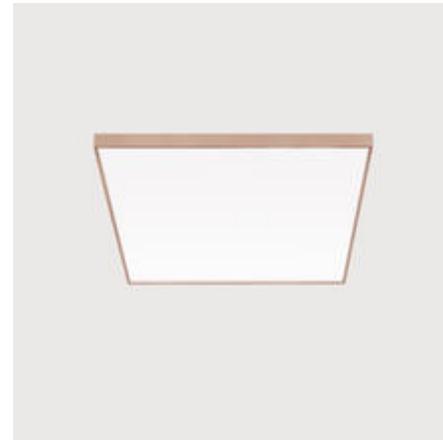

IP20 -220-240V 50-60 Hz IK 02 RG0 ≤ 3 MEDIUM POWER L85B10 50000h HIGH POWER UGR B10 50000h CE UKCA EEC

