
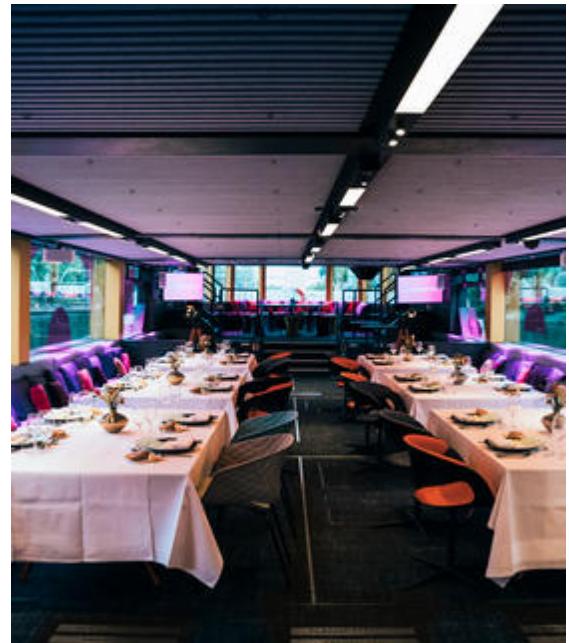


Matric-A5

Surface mounted light-line - Direct light distribution

Article code: LA5ABE-840E-L600

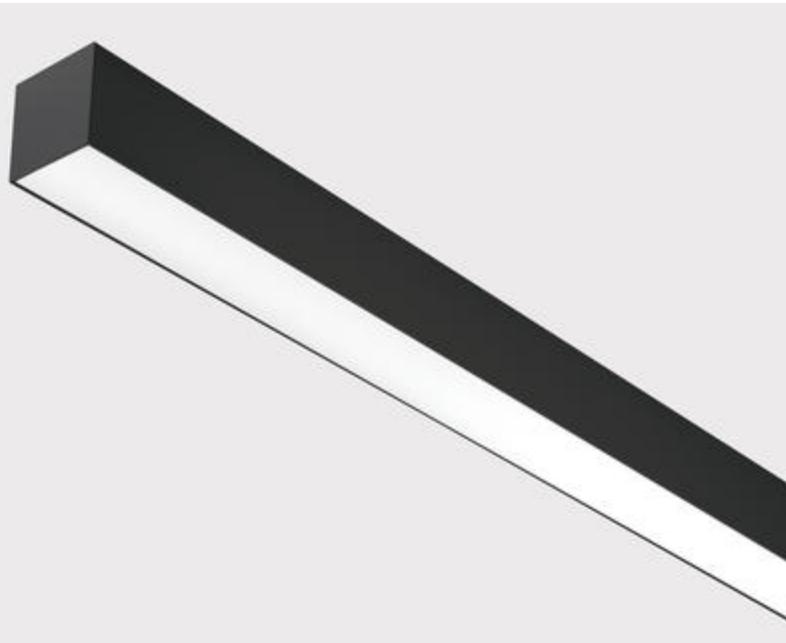

Illustrations may only be similar and serve as an orientation.

Matric-A5. LED. Wall or ceiling mounted light-line.
Luminaire body made of high-quality aluminum profile.
Surface finish Jet Black. Direct only light distribution. Colour
temperature: 4000(Cool White). Colour Rendering Index
(CRI): >80. Microprismatic screen for uniform illumination
and reduced luminance in office areas. UGR<=19.
Switchable. LxWxH (rectangular). L=600mm. W=81mm. H=
81mm. Low-power

current. 1000lm. 11W. 2,4kg. Binning initial <= MacAdam 3.
IP20. Protection class I. CE, UKCA marking. Prüfzeichen:
ENEC. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous
flux reduction up to 0,2%/1.000 operating hours. Nominal
failure rate: 0,2%/1.000 operating hours. L90B10 (tq 25°C) =
50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO
9001:2015 certificated

lightnet

Matric-A5


Surface mounted light-line - Direct light distribution

Article code: LA5ABE-840E-L600

Customer / Project: _____

Note: _____

Productname	Matric-A5
Lamp	LED
Installation Type	Surface mounted light-line
Surface finish	Jet Black
Light characteristics	Direct light distribution
Colour temperature	4000K
Colour Rendering Index (CRI)	CRI>80
Optical system	Microprismatic screen
Control	Switchable
Length L/Diameter D (mm)	L=600mm
Width W (mm)	W=81mm
Height H (mm)	H=81mm
Current/Power	Low-Power
Luminous Flux	1000lm
Power consumption	11W
Degree of protection	IP20
Certification	Prüfzeichen: ENEC
LED lifetime	L90B10 (tq 25°C) = 50.000h
UGR	UGR<=19
Photometric code	8 40 / 3 3 9
Photobiological class	RG0 (EN62471)
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (kg)	2,4kg

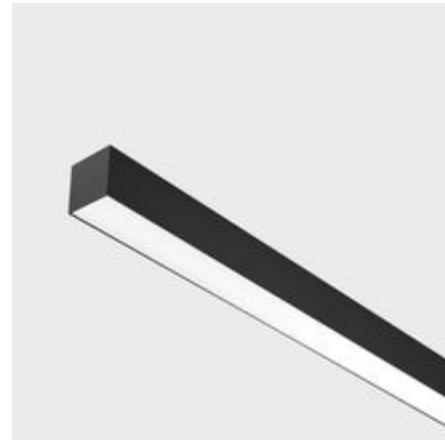

IP20 -220-240V 50-60 Hz IK 02 RG0 ≤3 L90B10 LOW POWER MEDIUM POWER HIGH POWER UGR10 UGR15 UGR18 UGR20 CE UKCA

