

Basic-M4


Recessed mounted luminaire for ceilings, mounting brackets incl - Direct light distribution



Illustrations may only be similar and serve as an orientation.

Basic-M4. LED. Recessed mounted luminaire with surrounding frame for installation in ceilings with cut-out openings. Mounting brackets included. Luminaire body made of high-quality aluminum profile. Surface finish Snow White. Direct only light distribution. Colour temperature: 3000K (Warm White). Colour Rendering Index (CRI): >80. Opal diffuser for enhanced light transmission and perfect uniform illumination. Dimmable DALI. DxH (round). D=420mm. H=100mm.

Medium-power current. 3553lm. 29W. 3,2kg. Binning initial <= MacAdam 3. Protection class: IP20. Protection class I. CE Declaration of Conformity. ENEC-Certification. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,3%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L85B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated

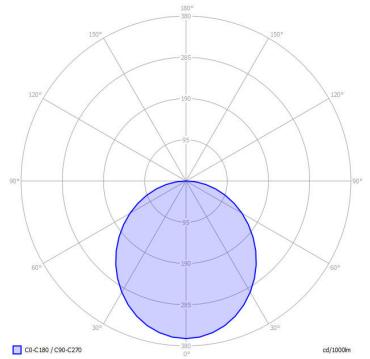

Article code: BM4OWL-830M-D420

Basic-M4

Recessed mounted luminaire for ceilings, mounting brackets incl - Direct light distribution




Customer / Project: _____

Note: _____

IP20 ~220-240V 50-60Hz IK02 RG0 EN62471 MacAdam CE

Productname	Basic-M4	Weight (kg)	3,2kg
Lamp	LED		
Installation Type	Recessed mounted luminaire for ceilings, mounting brackets incl		
Surface finish	Snow White		
Light characteristics	Direct light distribution		
Colour temperature	3000K		
Colour Rendering Index (CRI)	CRI>80		
Optical system	Opal diffuser		
Control	Dimmable (DALI)		
Length L/Diameter D (mm)	D=420mm		
Height H (mm)	H=100mm		
Current/Power	Medium-Power		
Luminous Flux	3553lm		
Watt	29W		
Degree of protection	IP20		
Certification	ENEC		
LED lifetime	L85B10 (tq 25°C) = 50.000h		
Photometric code	8 30 / 3 3 9		
Photobiological class	RG0 (EN62471)		
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C		

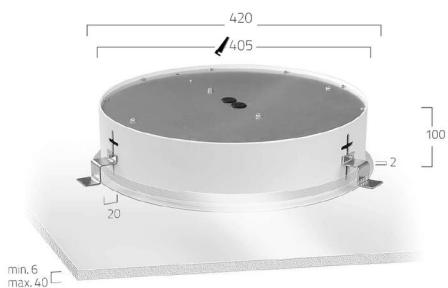

Date: 24.05.2022