
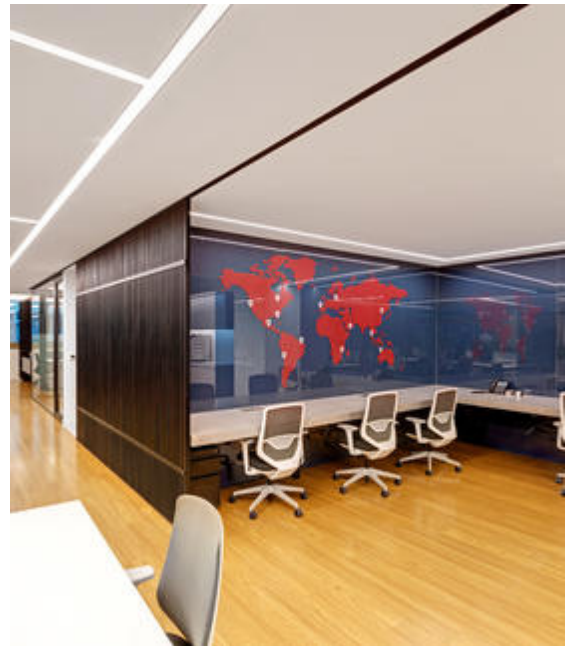


## Matric-F3

Recessed mounted light line, mounting brackets incl - Direct light distribution

Article code: LF3OEE-840M-L2075

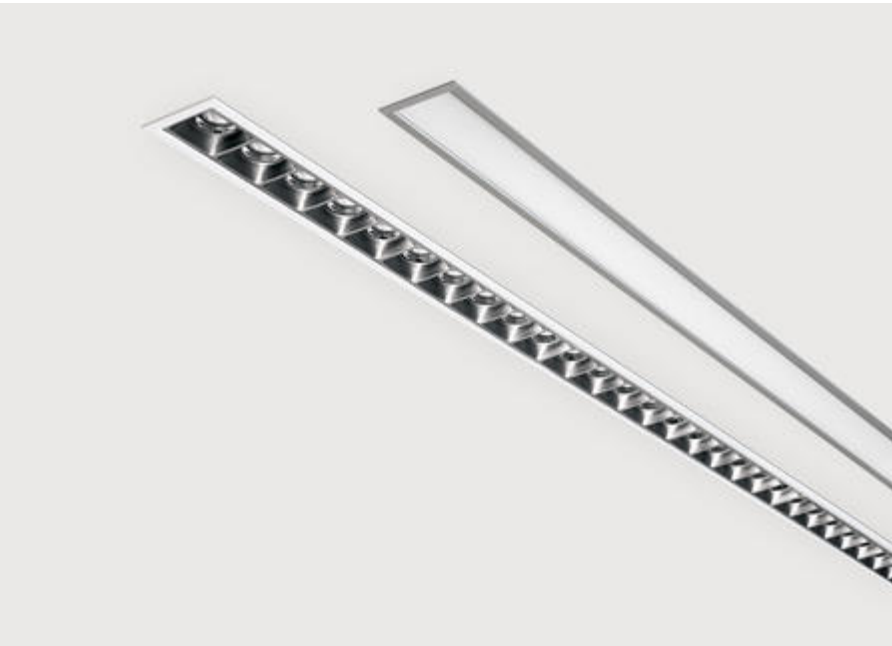

Illustrations may only be similar and serve as an orientation.

Matric-F3. LED. Recessed mounted light line with surrounding frame for installation in sawn wall and ceiling with cut-out openings. Mounting brackets included. Luminaire body made of high-quality aluminum profile. Surface finish Silver Anodised. Direct only light distribution. Colour temperature: 4000K (Cool White). Colour Rendering Index (CRI): >80. Opal diffuser for enhanced light transmission and perfect uniform illumination. Switchable.

LxWxH (rectangular). L=2075mm. W=70mm. H=75mm. Medium-power current. 4430lm. 38W. 5,2kg. Binning initial <= MacAdam 3. IP20. Protection class I. CE, UKCA marking. Prüfzeichen: ENEC. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,3%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L85B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated

## Matric-F3

Recessed mounted light line, mounting brackets incl - Direct light distribution

Article code: LF3OEE-840M-L2075

Customer / Project: \_\_\_\_\_

Note: \_\_\_\_\_

|                              |                                                     |
|------------------------------|-----------------------------------------------------|
| Productname                  | Matric-F3                                           |
| Lamp                         | LED                                                 |
| Installation Type            | Recessed mounted light line, mounting brackets incl |
| Surface finish               | Silver Anodised                                     |
| Light characteristics        | Direct light distribution                           |
| Colour temperature           | 4000K                                               |
| Colour Rendering Index (CRI) | CRI>80                                              |
| Optical system               | Opal diffuser                                       |
| Control                      | Switchable                                          |
| Length L/Diameter D (mm)     | L=2075mm                                            |
| Width W (mm)                 | W=70mm                                              |
| Height H (mm)                | H=75mm                                              |
| Current/Power                | Medium-Power                                        |
| Luminous Flux                | 4430lm                                              |
| Power consumption            | 38W                                                 |
| Degree of protection         | IP20                                                |
| Certification                | Prüfzeichen: ENEC                                   |
| LED lifetime                 | L85B10 (tq 25°C) = 50.000h                          |
| Photometric code             | 8 40 / 3 3 9                                        |
| Photobiological class        | RG0 (EN62471)                                       |
| Indoor/Outdoor               | Indoor: ta [ambient] max. 25°C                      |
| Weight (kg)                  | 5,2kg                                               |

