
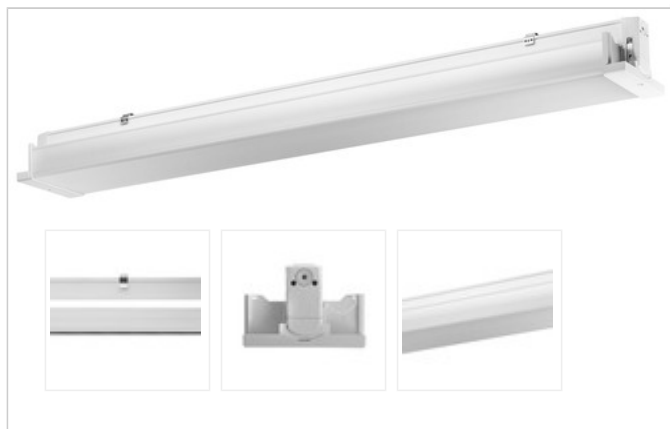


Article-No: 74832750

Recessed Luminaires

**TAUNUS SKII DALI 185 1546mm
PC 1x63W 100° 8200lm**

LED luminaire for flush-mounted installation. With cover made of PRACHTOPAL (PO, IK06) and housing made of white GFK-polyester. With MID-power LEDs, converter integrated in luminaire, with short ageing-resistant silicone seals, suitable for ceiling mounting, recess frame for built-in optionally available. Attention: PRACHT MANUFACTORY! Do you need a different color temperature, housing color or through-wiring? Specific challenges? No problem. We deliver customized solutions.

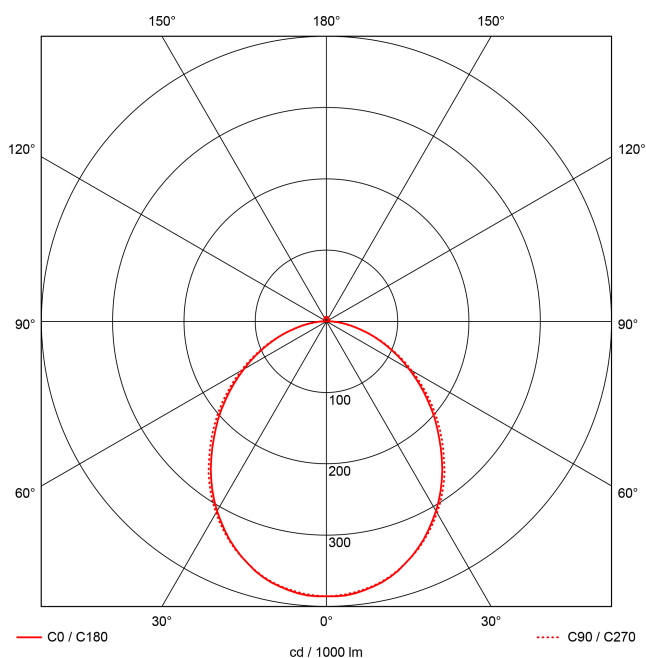

EAN	4018098356363
-----	---------------

Statistical product number	94054039
----------------------------	----------

LAMP

Product type	LED
Number of lamps /LED-rows	1
Color temperature K	4.000
Color rendering index	>90
Amount LED	240
Color tolerance (initial MacAdam)	3

POWER

Luminous flux lm	8200
Systempower W	63
Efficacy lm/W	130

LIGHT ENGINEERING

Light distribution	wide beam
Light distribution angle in °	100

TECHNICAL DATA

suitable for emergency lighting (EL)	yes
Nominal voltage	220-240V 0/50/60 Hz
Protection class SK	II
Ballast	LED-converter DIM DALI
Through-wiring mm²	5x2,5+2x1,5
Glow wire test	650 °C - 5 sec.
D-rating	yes
Type of voltage	AC/DC
Circuit breaker B10A	15
Circuit breaker B16A	24
Circuit breaker C10A	24
Circuit breaker C16A	40
Voltage spike protection U (L-N)	4
Voltage spike protection U (L-PE)	4

CAPACITY

IK-Impact resistance	08
Warranty (years)	5
L80/B10 Lebensdauer bei 25°C	62000
L70/B50 Life expectancy at 25°C	70000
Unprotected outdoor areas	not suitable
max. lowest temperature in °C	-25
max. highest temperature in °C	35
Ingress protection class	65
Agricultural use	
Attribute	Überspannungsschutz, Einschaltstrombegrenzer

DIMENSIONS AND WEIGHT

Length mm	1546
Width mm	192
Height mm	137
Weight netto in kg	4.8

PACKAGING

Length m VPE	1.64
Width VPE in m	0.2
Height VPE in m	0.175
Weight incl. packaging kg	5.1

ASSEMBLY AND MAINTENANCE

Standard installation	Ceiling mounting
Optional installation	Ceiling mounting
exchangeable LED board	not possible

MATERIAL

Case color	white
Renewable resources possible	no
Housing material	Fiberglass
Cover material	PC

The right of error and later technical developments is reserved.

State: 14.05.2020