



Article-No: 74833720

Recessed Luminaires

TAUNUS SKII DALI 185 1546mm PC 1x32W A060° 4200lm

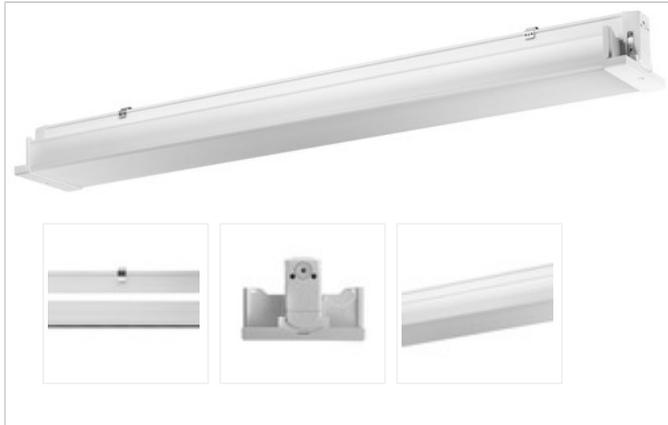

LED luminaire for flush-mounted installation. With cover made of PRACHTOPAL (PO, IK06) and housing made of white GFK-polyester. With MID-power LEDs, converter integrated in luminaire, with short ageing-resistant silicone seals, suitable for ceiling mounting, recess frame for built-in optionally available. Attention: PRACHT MANUFACTORY! Do you need a different color temperature, housing color or through-wiring? Specific challenges? No problem. We deliver customized solutions.

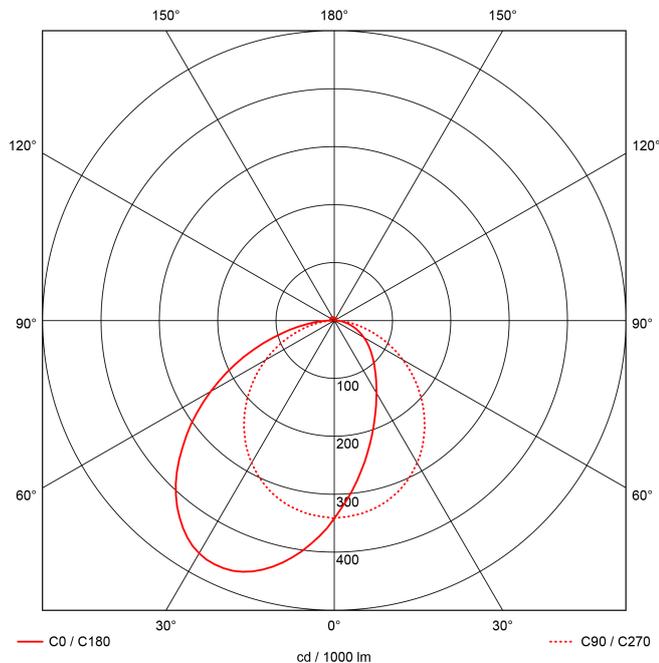

EAN 4018098355885

Statistical product number 94054039

LAMP

| | |
|-----------------------------------|-------|
| Product type | LED |
| Number of lamps /LED-rows | 1 |
| Color temperature K | 4.000 |
| Color rendering index | >90 |
| Amount LED | 240 |
| Color tolerance (initial MacAdam) | 3 |

POWER

| | |
|------------------|------|
| Luminous flux lm | 4200 |
| Systempower W | 32 |
| Efficacy lm/W | 132 |

LIGHT ENGINEERING

| | |
|-------------------------------|------------|
| Light distribution | asymmetric |
| Light distribution angle in ° | 60 |

TECHNICAL DATA

| | |
|--------------------------------------|------------------------|
| suitable for emergency lighting (EL) | yes |
| Nominal voltage | 220-240V 0/50/60 Hz |
| Protection class SK | II |
| Ballast | LED-converter DIM DALI |
| Through-wiring mm ² | 5x2,5+2x1,5 |
| Glow wire test | 650 °C - 5 sec. |
| D-rating | yes |
| Type of voltage | AC/DC |
| Circuit breaker B10A | 15 |
| Circuit breaker B16A | 24 |
| Circuit breaker C10A | 24 |
| Circuit breaker C16A | 40 |
| Voltage spike protection U (L-N) | 4 |
| Voltage spike protection U (L-PE) | 4 |

CAPACITY

| | |
|---------------------------------|--|
| IK-Impact resistance | 08 |
| Warranty (years) | 5 |
| L80/B10 Lebensdauer bei 25°C | 70000 |
| L70/B50 Life expectancy at 25°C | 70000 |
| Unprotected outdoor areas | not suitable |
| max. lowest temperature in °C | -25 |
| max. highest temperature in °C | 35 |
| Ingress protection class | 65 |
| Agricultural use | |
| Attribute | Überspannungsschutz, Einschaltstrombegrenzer |

DIMENSIONS AND WEIGHT

| | |
|--------------------|------|
| Length mm | 1546 |
| Width mm | 192 |
| Height mm | 137 |
| Weight netto in kg | 4.8 |

PACKAGING

| | |
|---------------------------|-------|
| Length m VPE | 1.64 |
| Width VPE in m | 0.2 |
| Height VPE in m | 0.175 |
| Weight incl. packaging kg | 5.1 |

ASSEMBLY AND MAINTENANCE

| | |
|------------------------|------------------|
| Standard installation | Ceiling mounting |
| Optional installation | Ceiling mounting |
| exchangeable LED board | not possible |

MATERIAL

| | |
|------------------------------|------------|
| Case color | white |
| Renewable resources possible | no |
| Housing material | Fiberglass |
| Cover material | PC |

*The right of error and later technical developments is reserved.
State: 14.05.2020*