


Ringo Star-P3

Pendant luminaire - Direct/indirect light distribution

Article code: RP3ASE-840M-D1200-K

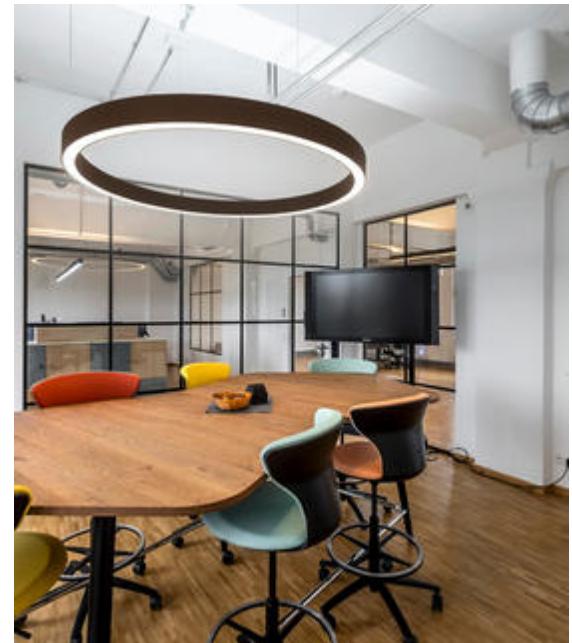

Illustrations may only be similar and serve as an orientation.

Ringo Star-P3. LED. Pendant luminaire. Luminaire body made of aluminium profile with 60mm track width. Surface finish Radiant Silver. Direct/indirect light distribution. Colotemperature: 4000K (Cool White). Colour Rendering Index (CRI): >80. Microprismatic screen for uniform illumination and reduced luminance in office areas. UGR<=19. Switchable. DxHxW (round). D=1200mm. W=60mm. H=85mm. Cord suspension for parallel installation with power supply cable and ceiling rose (Set). Pendant length max

4000mm. Power supply: transparent. Ceiling rose: Matching luminaire's surface colour. Medium-power current. 13980lm. 134W. 12,2kg. Binning initial <= MacAdam 3. IP20. Protection class I. CE, UKCA marking. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,3%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L85B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated

Ringo Star-P3

Pendant luminaire - Direct/indirect light distribution

Article code: RP3ASE-840M-D1200-K

Customer / Project: _____

Note: _____

Productname	Ringo Star-P3
Lamp	LED
Installation Type	Pendant luminaire
Surface finish	Radiant Silver
Light characteristics	Direct/indirect light distribution
Colour temperature	4000K
Colour Rendering Index (CRI)	CRI>80
Optical system	Microprismatic screen
Control	Switchable
Length L/Diameter D (mm)	D=1200mm
Width W (mm)	W=60mm
Height H (mm)	H=85mm
Current/Power	Medium-Power
Luminous Flux	13980lm
Power consumption	134W
Suspension	Parallel susp. (Set)
Ceiling rose colour	Ceiling rose: Matching luminaire's surface colour
Pendant length (mm)	Pendant length max 4000mm
Degree of protection	IP20
Cable Colour	Power supply: transparent
LED lifetime	L85B10 (tq 25°C) = 50.000h
UGR	UGR<=19
Photometric code	8 40 / 3 3 9
Photobiological class	RG0 (EN62471)
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (kg)	12,2kg



IP20 ~220-240V 50-60Hz IK02 RG0 ≤ 3 MEDIUM POWER L85B10 50.000h HIGH POWER U80B10 50.000h CE UK

