


Matric-WX

Wall mounted luminaire - Direct/indirect light distribution

Article code: LWXOEE-830M-L600

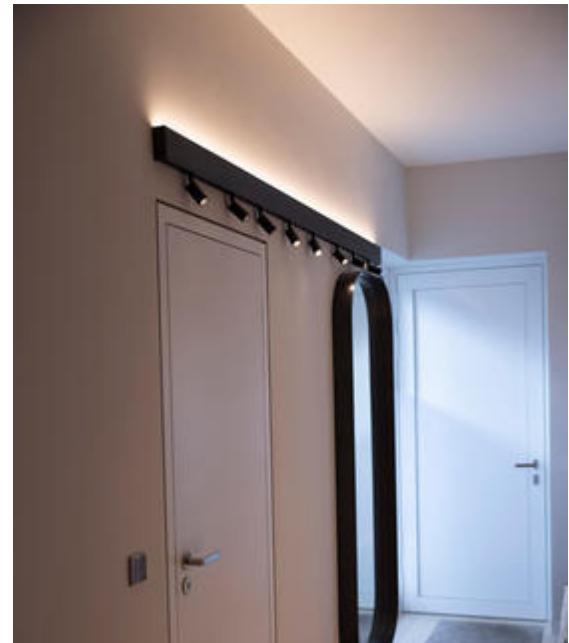

Illustrations may only be similar and serve as an orientation.

Matric-WX. LED. Wall mounted luminaire. Luminaire body made of high-quality aluminum profile. Surface finish Silver Anodised. Direct/indirect light distribution. Colour temperatur 3000K (Warm White). Colour Rendering Index (CRI): >80. Opal diffuser for enhanced light transmission and perfect uniform illumination. Switchable. LxWxH (rectangular). L=600mm. W=41mm. H=100mm. Medium-power current. 2309lm. 20W.

2,2kg. Binning initial <= MacAdam 3. IP20. Protection class I. CE, UKCA marking. Prüfzeichen: ENEC. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,3%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L85B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated

lightnet

Matric-WX

Wall mounted luminaire - Direct/indirect light distribution

Article code: LWXOEE-830M-L600

Customer / Project: _____

Note: _____

Productname	Matric-WX
Lamp	LED
Installation Type	Wall mounted luminaire
Surface finish	Silver Anodised
Light characteristics	Direct/indirect light distribution
Colour temperature	3000K
Colour Rendering Index (CRI)	CRI>80
Optical system	Opal diffuser
Control	Switchable
Length L/Diameter D (mm)	L=600mm
Width W (mm)	W=41mm
Height H (mm)	H=100mm
Current/Power	Medium-Power
Luminous Flux	2309lm
Power consumption	20W
Degree of protection	IP20
Certification	Prüfzeichen: ENEC
LED lifetime	L85B10 (tq 25°C) = 50.000h
Photometric code	8 30 / 3 3 9
Photobiological class	RG0 (EN62471)
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (kg)	2,2kg



IP20 -220V 50-60 Hz IK 02 RG0 ≤3 MacAdam LOW POWER 10000h MEDIUM POWER 50000h HIGH POWER 80000h CE UK

