


## Matric-WX

Wall mounted luminaire - Direct/indirect light distribution

Article code: LWXYEE-840H-L1185

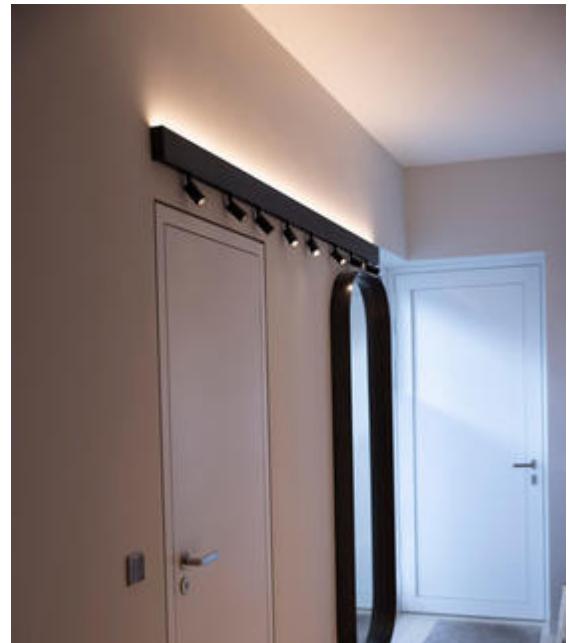

Illustrations may only be similar and serve as an orientation.

Matric-WX. LED. Wall mounted luminaire. Luminaire body made of high-quality aluminum profile. Surface finish Silver Anodised. Direct/indirect light distribution. Colour temperature 4000K (Cool White). Colour Rendering Index (CRI): >80. Asymmetrical optics for homogeneous illumination extending into the depth of the room. Switchable. LxWxH (rectangular). L=1185mm. W=41mm. H=100mm. High-power current.

4400lm. 53W. 4,1kg. Binning initial <= MacAdam 3. IP20. Protection class I. CE, UKCA marking. Prüfzeichen: ENEC. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,4%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L80B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated

# lightnet

## Matric-WX

Wall mounted luminaire - Direct/indirect light distribution

Article code: LWXYEE-840H-L1185

Customer / Project: \_\_\_\_\_

Note: \_\_\_\_\_



IP20 -220-240V 50-60 Hz IK 02 RG0 ≤3 MacAdam LOW POWER 8000h MEDIUM POWER 8000h HIGH POWER 8000h

Productname	Matric-WX
Lamp	LED
Installation Type	Wall mounted luminaire
Surface finish	Silver Anodised
Light characteristics	Direct/indirect light distribution
Colour temperature	4000K
Colour Rendering Index (CRI)	CRI>80
Optical system	Asymmetrical
Control	Switchable
Length L/Diameter D (mm)	L=1185mm
Width W (mm)	W=41mm
Height H (mm)	H=100mm
Current/Power	High-Power
Luminous Flux	4400lm
Power consumption	53W
Degree of protection	IP20
Certification	Prüfzeichen: ENEC
LED lifetime	L80B10 (tq 25°C) = 50.000h
Photometric code	8 40 / 3 3 9
Photobiological class	RG0 (EN62471)
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (kg)	4,1kg

