

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: SPL

Supplier's address: Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

Model identifier: LF024070501

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	Ba22d		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	6	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	400 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 500
On-mode power (P_{on}), expressed in W	5,5	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	93
Outer dimensions without separate control gear, light-	Height	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width		
	Depth		

ing control parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,481 0,407	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	55	Survival factor	0,96	
the lumen maintenance factor	0,96			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,90	Colour consistency in McAdam ellipses	6	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,1	Stroboscopic effect metric (SVM)	0,3	

(a) '-': not applicable;

(b) '-': not applicable;

SPL Spectrum Test Report

Sample : 5-5
 Specification : LF024070501
 Sample No. : LF024070501 03
 Manufacturer : SPL


Date : 2018-01-10 11:53:40
 Sam. Status :
 Instrument : HaasSuite(EVERFINE)
 Test by :
 Assessor : damin

Test Condition

Temperature : 25.3Deg
 WL Range : 380nm-780nm
 Test Mode : Fast Test

RH : 65.0%
 IP : 52028 (79%)
 T : 40 ms
 Sensitivity : High

Spectrum

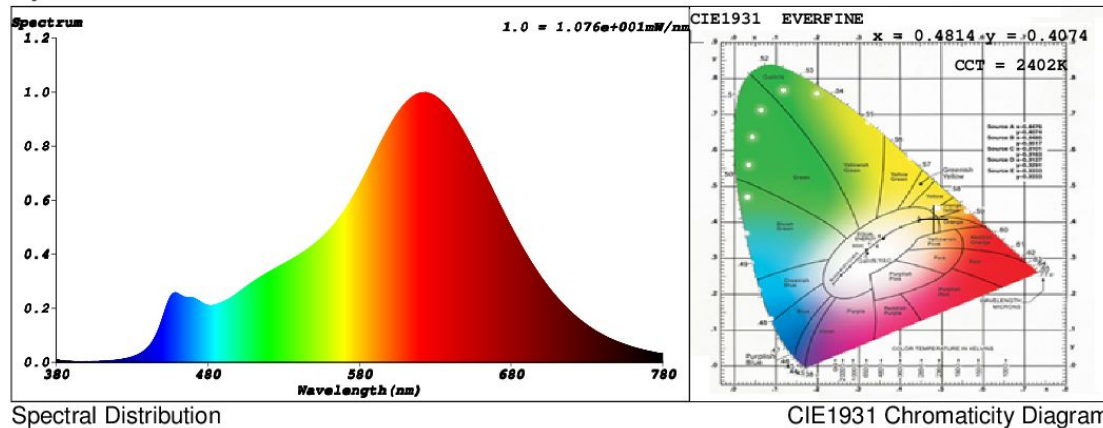

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.4814$ $y = 0.4074$ / $u' = 0.2780$ $v' = 0.5294$ ($duv = -2.33e-03$)

CCT= 2402K Prcp WL: $L_d = 586.6nm$ Purity=66.8%

Peak WL: $L_p = 624nm$ FWHM: $=118.8nm$ Ratio: R=29.7% G=67.7% B=2.6%

Render Index: $R_a = 91.0$

R1 =95 R2 =98 R3 =92 R4 =93 R5 =97 R6 =92 R7 =86
 R8 =76 R9 =55 R10=96 R11=96 R12=84 R13=98 R14=96 R15=89

LEVEL:OUT WHITE:OUT

Photometric & Radiometric Parameters

Flux = 433.46 lm Eff. : 77.51 lm/W $F_e = 1.5894 W$

Electrical parameters

V = 230.1 V I = 0.02800 A P = 5.593 W PF = 0.8681

Schiefer Professional Lighting

www.professional-lighting.eu