

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** SPL

**Supplier's address:** Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

**Model identifier:** L561925927

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Ba15d		
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	Yes	Dimmable:	Only with specific dimmers

## Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

### General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	9	Energy efficiency class	G
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	400 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power ( $P_{on}$ ), expressed in W	9,0	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	92
Outer dimensions without separate control gear, light-	Height	55	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	70	
	Depth	70	
			See image in last page

ing control parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,461 0,412
<b>Parameters for directional light sources:</b>			
Peak luminous intensity (cd)	1 300	Beam angle in degrees, or the range of beam angles that can be set	24
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	86	Survival factor	1,00
the lumen maintenance factor	0,72		

(a) : not applicable;

(b) : not applicable;


**SPL Spectrum Test Report**

Sample :	Date :	2021-07-19 13:06:58
Specification : L561925927	Sam. Status :	
Sample No. :	Instrument :	HaasSuite(EVERFINE)
Manufacturer :	Test by :	Renee
	Assessor :	damin

**Test Condition**

Temperature :	25.3Deg	RH :	65.0%
WL Range :	380nm-780nm	IP :	47718 (73%)
Test Mode :	Fast Test	T :	40 ms
		Sensitivity :	High

**Spectrum**

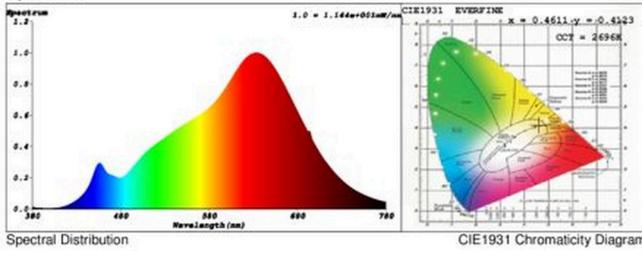

**Colorimetric Parameters**

Chromaticity Coordinate:  $x = 0.4611$   $y = 0.4123$  /  $u' = 0.2625$   $v' = 0.5282$  ( $duv=5.23e-04$ )  
 CCT= 2696K Prcp WL: Ld=584.1nm Purity=62.2%  
 Peak WL: Lp=633nm FWHM: =150.7nm Ratio:R=27.2% G=70.2% B=2.6%

Render Index: Ra = 98.1

R1 =100 R2 =100 R3 =98 R4 =100 R5 =99 R6 =98 R7 =97  
 R8 =94 R9 =86 R10=98 R11=97 R12=90 R13=100 R14=98 R15=97  
 LEVEL:OUT WHITE:ANSI\_2700K

**Photometric & Radiometric Parameters**

Flux = 490.50 lm Eff. : 90.70 lm/W  $F_e = 1.8684$  W

**Electrical parameters**

V = 11.96 V I = 0.4917 A P = 5.408 W PF = 0.9198