

## panel mounting socket outlet, angled - flange 75x75, fixing centers 60x60




| Product description       |                                                            |
|---------------------------|------------------------------------------------------------|
| BALS-Prd.-Nr              | 1220011                                                    |
| EAN                       | 4024941379458                                              |
| Product category          | Panel mounting socket outlet INNOLINQ QUICK-CONNECT angled |
| Current                   | 16A                                                        |
| Number of poles           | 5p                                                         |
| Arrangement of phases     | 3p+N+PE                                                    |
| Position of earth contact | 6 h                                                        |
| Voltage                   | 200/346 - 240/415V~                                        |


| Product description            |                                                                                            |
|--------------------------------|--------------------------------------------------------------------------------------------|
| Frequency                      | 50/60Hz                                                                                    |
| Protection degree              | IP54                                                                                       |
| Colour code                    | red RAL 3000                                                                               |
| Colour of appliance            | Hinged lid red RAL 3000, Enclosure grey RAL 7035                                           |
| Connection design              | screwless spring terminals with KONTEX-ULTRA contact                                       |
| Maximum conductor size         | 4,0 qmm                                                                                    |
| Cable entry                    | other                                                                                      |
| Height                         | 95mm                                                                                       |
| Width                          | 75mm                                                                                       |
| Depth                          | 97mm                                                                                       |
| Flange size vertical in mm     | 75mm                                                                                       |
| Flange size horizontal in mm   | 75mm                                                                                       |
| Drill hole dist. vertical mm   | 60mm                                                                                       |
| Drill hole dist. horizontal mm | 60mm                                                                                       |
| Material of enclosure          | Polyamide                                                                                  |
| Contacts                       | The contacts are brass, The contact carrier is made of high temperature resistant material |

| Additional technical properties |                                                          |
|---------------------------------|----------------------------------------------------------|
|                                 | The inclination is 20°, This product is without any lead |

| Logistics data |                  |
|----------------|------------------|
| Weight/pcs     | 0.141 kg / Piece |
| Packaging      | Bag              |
| Content amount | 1 ST             |
| EAN            | 4024941379458    |
| Length         | 97 mm            |
| Width          | 75 mm            |
| Height         | 95 mm            |
| Weight         | 0.142 kg         |
| Volume         | 691.125 ccm      |
| Packaging      | Carton           |
| Content amount | 10 ST            |
| EAN            | 4024941390323    |
| Length         | 245 mm           |
| Width          | 177 mm           |
| Height         | 185 mm           |
| Weight         | 1.543 kg         |
| Volume         | 7,140 ccm        |

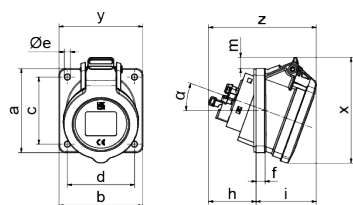

Einbauöffnung



4MB508

|        |      |
|--------|------|
| Ampere | 16   |
| Poles  | 5    |
| a      | 75,0 |
| b      | 75,0 |
| c      | 60,0 |
| d      | 60,0 |
| Øe     | 5,5  |
| f      | 8,0  |
| h      | 43,0 |
| i      | 54,0 |
| Øl     | 70,0 |
| m      | 11,0 |
| x      | 95,0 |
| y      | 75,0 |
| z      | 97,0 |

