

panel mounting appliance inlet - without closure cap




Product description	
BALS-Prd.-Nr	26055
EAN	4024941260558
Product category	TE surface mounting appliance inlet QUICK-CONNECT
Current	32A
Number of poles	5p
Arrangement of phases	3p+N+PE
Position of earth contact	6 h
Voltage	200/346 - 240/415V~
Frequency	50/60Hz

Product description	
Protection degree	IP67/69
Colour code	red RAL 3000
Colour of appliance	Enclosure grey RAL 7035, Bayonet ring grey RAL 7035, Collar red RAL 3000
Connection design	screwless spring-clamp technology
Maximum conductor size	6,0 qmm
Cable entry	other
Height	139mm
Width	100mm
Depth	101mm
Flange size vertical in mm	75mm
Flange size horizontal in mm	90mm
Drill hole dist. vertical mm	45mm
Drill hole dist. horizontal mm	78mm
Material of enclosure	Polyamide
Contacts	The contact carrier is made of high temperature resistant material, the contacts are brass nickel plated

Logistics data	
Weight/pcs	0.295 kg / Piece
Packaging	Bag
Content amount	1 ST

Logistics data	
EAN	4024941260558
Length	101 mm
Width	100 mm
Height	139 mm
Weight	0.296 kg
Volume	1,403.9 ccm
Packaging	Carton
Content amount	10 ST
EAN	4024941823074
Length	325 mm
Width	217 mm
Height	210 mm
Weight	3.156 kg
Volume	13,588.4 ccm

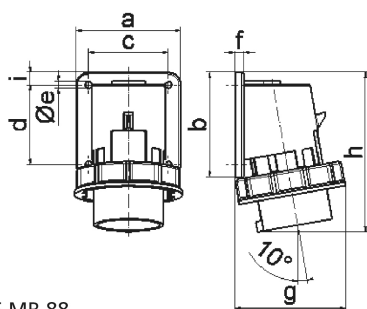

5 MB 88

Ampere	16	32				
Polzahl	5	5				
a	84,0	90,0				
b	84,0	75,0				
c	64,0	78,0				
d	64,0	45,0				
e ø	5,5	5,5				
f	7,0	7,0				
g	90,0	101,0				
h	129,0	139,0				
i	10,0	13,0				
Leiter mm² min	1	2,5				
Leiter mm² max	2,5	6				