

Panel mounting appliance inlet straight - TN - flange 85x85 fixing centers 70x70



Product description	
BALS-Prd.-Nr	2897
EAN	4024941028974
Product category	TN panel mounting appliance inlet, straight
Current	32A
Number of poles	5p
Arrangement of phases	3p+N+PE
Position of earth contact	6 h
Voltage	200/346 - 240/415V~

Product description	
Frequency	50/60Hz
VG-type-no.:	VG 96919 AP 005
Supply no.:	5935-12-409-1933
Protection degree	IP67
Colour code	bronze-green RAL 6031-F9
Colour of appliance	Bayonet ring bronze-green RAL 6031-F9, Collar bronze-green RAL 6031-F9, Closure cap bronze-green RAL 6031-F9, Enclosure bronze-green RAL 6031-F9
Connection design	with screw terminal
Maximum conductor size	6,0 qmm
Cable entry	other
Height	105mm
Width	101.5mm
Depth	96mm
Flange size vertical in mm	85mm
Flange size horizontal in mm	85mm
Drill hole dist. vertical mm	70mm
Drill hole dist. horizontal mm	70mm
Material of enclosure	Polyamide
Contacts	the contact carrier is made of high temperature resistant material, the contacts are brass nickel plated

Additional technical properties

With closure cap

Logistics data

Weight/pcs	0.358 kg / Piece
------------	------------------

Packaging	Bag
-----------	-----

Content amount	1 ST
----------------	------

EAN	4024941028974
-----	---------------

Length	96 mm
--------	-------

Width	101.5 mm
-------	----------

Height	105 mm
--------	--------

Weight	0.359 kg
--------	----------

Volume	1,023.12 ccm
--------	--------------

Packaging	Carton
-----------	--------

Content amount	10 ST
----------------	-------

EAN	4024941819213
-----	---------------


Length	325 mm
--------	--------

Width	217 mm
-------	--------

Height	210 mm
--------	--------

Weight	3.786 kg
--------	----------

Volume	13,588.4 ccm
--------	--------------

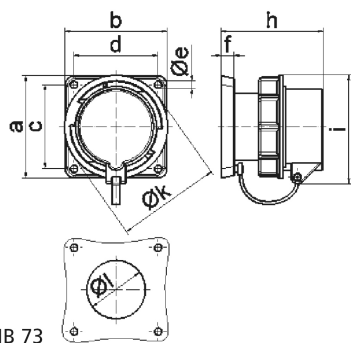

5 MB 73

Ampere Polzahl	16 3	16 4	16 5	32 3	32 4	32 5
a	85,0	85,0	85,0	85,0	85,0	85,0
b	85,0	85,0	85,0	85,0	85,0	85,0
c	70,0	70,0	70,0	70,0	70,0	70,0
d	70,0	70,0	70,0	70,0	70,0	70,0
e ø	6,3	6,3	6,3	6,3	6,3	6,3
f	11,0	11,0	11,0	11,0	11,0	11,0
h	84,0	84,0	85,0	94,0	94,0	94,0
i	82,5	86,0	91,0	96,5	96,5	104,0
k ø	70,5	78,5	86,5	94,0	94,0	101,5
l ø	49,0	49,0	49,0	49,0	49,0	49,0
Leiter mm² min	1,0	1,0	1,0	2,5	2,5	2,5
Leiter mm² max	2,5	2,5	2,5	6,0	6,0	6,0