


## Plug - with screwless terminals for harsh applications

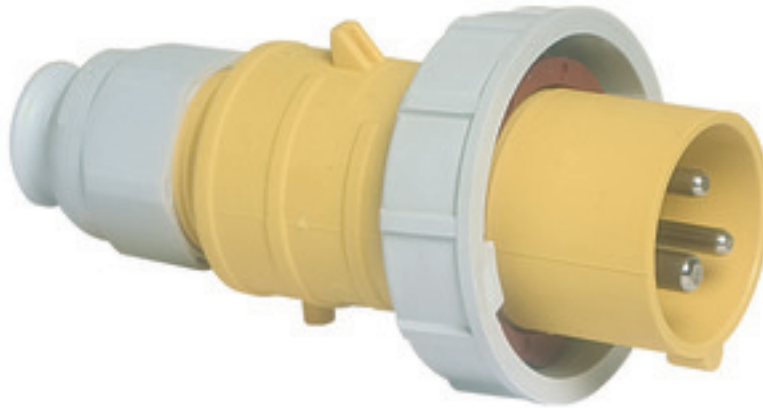


| Product description       |                       |
|---------------------------|-----------------------|
| BALS-Prd.-Nr              | 21237                 |
| EAN                       | 4024941212373         |
| Product category          | QUICK-CONNECT TE plug |
| Current                   | 16A                   |
| Number of poles           | 3p                    |
| Arrangement of phases     | 2P+PE                 |
| Position of earth contact | 4 h                   |
| Voltage                   | 100 - 130V~           |
| Frequency                 | 50/60Hz               |

| Product description    |  |
|------------------------|--|
| Protection degree      | IP67   |
| Colour code            | yellow RAL 1012  |
| Colour of appliance    | Collar yellow RAL 1012, Bayonet ring grey RAL 7035, Cable gland grey RAL 7035, Housing cover yellow RAL 1012 |
| Connection design      | screwless spring-clamp technology  |
| Maximum conductor size | 2,5 qmm  |
| Cable entry            | with cable gland   |
| Height                 | 147mm  |
| Width                  | 71mm   |
| Depth                  | 71mm   |
| Material of enclosure  | Polyamide  |
| Contacts               | the contact carrier is made of high temperature resistant material, the contacts are brass nickel plated     |

| Additional technical properties |   |
|---------------------------------|---|
|                                 | For cable diameter from 8 up to max. 18 mm, MULTI-GRIP cable gland with gasket, integrated cable clamp and additional water evacuation openings |

| Logistics data |                 |
|----------------|-----------------|
| Weight/pcs     | 0.15 kg / Piece |
| Packaging      | Bag             |
| Content amount | 1 ST            |
| EAN            | 4024941212373   |

| Logistics data |               |
|----------------|---------------|
| Length         | 71 mm         |
| Width          | 71 mm         |
| Height         | 147 mm        |
| Weight         | 0.151 kg      |
| Volume         | 741.027 ccm   |
| Packaging      | Carton        |
| Content amount | 10 ST         |
| EAN            | 4024941971362 |
| Length         | 275 mm        |
| Width          | 175 mm        |
| Height         | 137 mm        |
| Weight         | 1.625 kg      |
| Volume         | 5,737.5 ccm   |

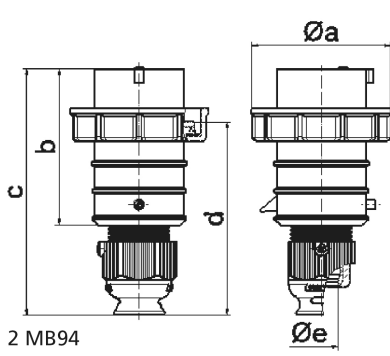

| Ampere Polzahl | 16<br>3 | 16<br>4 | 16<br>5 | 32<br>3 | 32<br>4 | 32<br>5 |
|----------------|---------|---------|---------|---------|---------|---------|
| a ø            | 70,0    | 78,0    | 86,0    | 94,0    | 94,0    | 101,0   |
| b              | 95,0    | 95,0    | 97,0    | 118,0   | 118,0   | 117,0   |
| c              | 145,0   | 145,0   | 152,0   | 178,0   | 178,0   | 181,0   |
| d              | 111,0   | 111,0   | 119,0   | 136,0   | 136,0   | 138,5   |
| e ø            | 18,0    | 18,0    | 21,0    | 23,0    | 23,0    | 27,0    |
| Leiter mm² min | 1       | 1       | 1       | 2,5     | 2,5     | 2,5     |
| Leiter mm² max | 2,5     | 2,5     | 2,5     | 6       | 6       | 6       |
|                |         |         |         |         |         |         |
|                |         |         |         |         |         |         |
|                |         |         |         |         |         |         |
|                |         |         |         |         |         |         |

2 MB94