

## Plug - with screw terminals one piece housing

| Product description       |                                                                               |
|---------------------------|-------------------------------------------------------------------------------|
| BALS-Prd.-Nr              | 210577                                                                        |
| EAN                       | 4024941109772                                                                 |
| Product category          | TLS plug with MULTI-GRIP cable gland                                          |
| Current                   | 16A                                                                           |
| Number of poles           | 3p                                                                            |
| Arrangement of phases     | 2P+PE                                                                         |
| Position of earth contact | 9 h                                                                           |
| Voltage                   | 380 - 415V~                                                                   |
| Frequency                 | 50/60Hz                                                                       |
| Protection degree         | IP67                                                                          |
| Colour code               | red RAL 3000                                                                  |
| Colour of appliance       | Enclosure red RAL 3000, Bayonet ring grey RAL 7035, Cable gland grey RAL 7035 |
| Connection design         | with screw terminal                                                           |
| Maximum conductor size    | 2,5 qmm                                                                       |
| Cable entry               | with cable gland                                                              |
| Height                    | 140mm                                                                         |
| Width                     | 70mm                                                                          |
| Depth                     | 70mm                                                                          |
| Material of enclosure     | Polyamide                                                                     |

| Product description |                                                                                |
|---------------------|--------------------------------------------------------------------------------|
| Contacts            | the contact carrier is made of polyamide, the contacts are brass nickel plated |

| Additional technical properties |                                                                                                                                |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------|
|                                 | one piece housing, MULTI-GRIP cable gland with gasket and integrated strain relief, For cable diameter from 8 up to max. 18 mm |

| Logistics data |                  |
|----------------|------------------|
| Weight/pcs     | 0.135 kg / Piece |
| Packaging      | Bag              |
| Content amount | 1 ST             |
| EAN            | 4024941109772    |
| Length         | 70 mm            |
| Width          | 70 mm            |
| Height         | 140 mm           |
| Weight         | 0.136 kg         |
| Volume         | 686 ccm          |
| Packaging      | Carton           |
| Content amount | 10 ST            |
| EAN            | 4024941832199    |
| Length         | 275 mm           |
| Width          | 175 mm           |
| Height         | 137 mm           |


## Logistics data

Weight

1.475 kg

Volume

5,737.5 ccm

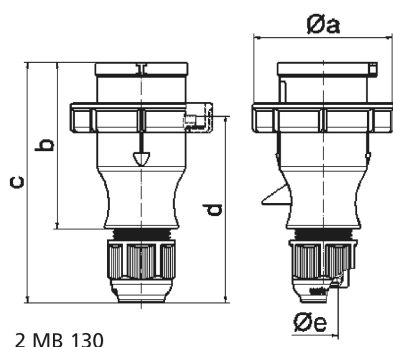

| Ampere         | 16    | 16    | 16    | 32    | 32    | 32    |
|----------------|-------|-------|-------|-------|-------|-------|
| Polzahl        | 3     | 4     | 5     | 3     | 4     | 5     |
| a Ø            | 70,0  | 78,0  | 86,0  | 94,0  | 94,0  | 101,0 |
| b              | 94,5  | 98,0  | 101,0 | 115,0 | 115,0 | 119,0 |
| c              | 138,0 | 142,0 | 145,0 | 170,0 | 170,0 | 174,0 |
| d              | 105,5 | 109,5 | 112,5 | 128,0 | 128,0 | 132,0 |
| e Ø            | 18,0  | 18,0  | 18,0  | 23,0  | 23,0  | 23,0  |
| Leiter mm² min | 1     | 1     | 1     | 2,5   | 2,5   | 2,5   |
| Leiter mm² max | 2,5   | 2,5   | 2,5   | 6     | 6     | 6     |
|                |       |       |       |       |       |       |
|                |       |       |       |       |       |       |
|                |       |       |       |       |       |       |
|                |       |       |       |       |       |       |