

Plug - with screwless terminals for harsh applications




| Product description | |
|---------------------------|-----------------------|
| BALS-Prd.-Nr | 21453 |
| EAN | 4024941214537 |
| Product category | QUICK-CONNECT TE plug |
| Current | 16A |
| Number of poles | 3p |
| Arrangement of phases | 2P+PE |
| Position of earth contact | 10 h |
| Voltage | > 50V~ |
| Frequency | 100 - 300Hz |

| Product description | |
|------------------------|--|
| Protection degree | IP67 |
| Colour code | green RAL 6002 |
| Colour of appliance | Bayonet ring grey RAL 7035, Cable gland grey RAL 7035, Housing cover green RAL 6002, Collar green RAL 6002 |
| Connection design | screwless spring-clamp technology |
| Maximum conductor size | 2,5 qmm |
| Cable entry | with cable gland |
| Height | 147mm |
| Width | 71mm |
| Depth | 71mm |
| Material of enclosure | Polyamide |
| Contacts | the contact carrier is made of high temperature resistant material, the contacts are brass nickel plated |

| Additional technical properties | |
|---------------------------------|---|
| | For cable diameter from 8 up to max. 18 mm, MULTI-GRIP cable gland with gasket, integrated cable clamp and additional water evacuation openings |

| Logistics data | |
|----------------|------------------|
| Weight/pcs | 0.149 kg / Piece |
| Packaging | Bag |
| Content amount | 1 ST |
| EAN | 4024941214537 |

| Logistics data | |
|----------------|---------------|
| Length | 71 mm |
| Width | 71 mm |
| Height | 147 mm |
| Weight | 0.15 kg |
| Volume | 4,735.104 ccm |
| Packaging | Carton |
| Content amount | 10 ST |
| EAN | 4024941831987 |
| Length | 275 mm |
| Width | 175 mm |
| Height | 137 mm |
| Weight | 1.615 kg |
| Volume | 5,737.5 ccm |

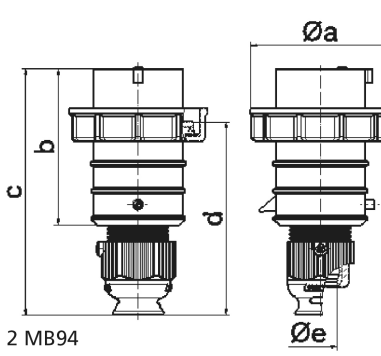

| Ampere Polzahl | 16 3 | 16 4 | 16 5 | 32 3 | 32 4 | 32 5 |
|----------------|---------|---------|---------|---------|---------|---------|
| a ø | 70,0 | 78,0 | 86,0 | 94,0 | 94,0 | 101,0 |
| b | 95,0 | 95,0 | 97,0 | 118,0 | 118,0 | 117,0 |
| c | 145,0 | 145,0 | 152,0 | 178,0 | 178,0 | 181,0 |
| d | 111,0 | 111,0 | 119,0 | 136,0 | 136,0 | 138,5 |
| e ø | 18,0 | 18,0 | 21,0 | 23,0 | 23,0 | 27,0 |
| Leiter mm² min | 1 | 1 | 1 | 2,5 | 2,5 | 2,5 |
| Leiter mm² max | 2,5 | 2,5 | 2,5 | 6 | 6 | 6 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

2 MB94