

Plug - with screwless terminals for harsh applications



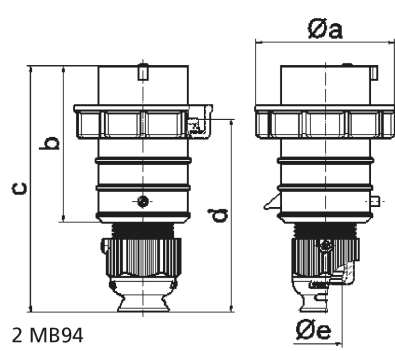
Product description	
BALS-Prd.-Nr	21350
EAN	4024941213509
Product category	QUICK-CONNECT TE plug
Current	16A
Number of poles	4p
Arrangement of phases	3P+PE
Position of earth contact	7 h
Voltage	480 - 500V~
Frequency	50/60Hz

Product description	
Protection degree	IP67
Colour code	black RAL 9005
Colour of appliance	Collar black RAL 9005, Bayonet ring grey RAL 7035, Cable gland grey RAL 7035, Housing cover black RAL 9005
Connection design	screwless spring-clamp technology
Maximum conductor size	2,5 qmm
Cable entry	with cable gland
Height	149mm
Width	79mm
Depth	79mm
Material of enclosure	Polyamide
Contacts	the contact carrier is made of high temperature resistant material, the contacts are brass nickel plated

Additional technical properties	
	For cable diameter from 8 up to max. 18 mm, MULTI-GRIP cable gland with gasket, integrated cable clamp and additional water evacuation openings

Logistics data	
Weight/pcs	0.175 kg / Piece
Packaging	Bag
Content amount	1 ST
EAN	4024941213509

Logistics data	
Length	79 mm
Width	79 mm
Height	149 mm
Weight	0.176 kg
Volume	1,190.135 ccm
Packaging	Carton
Content amount	10 ST
EAN	4024941958080
Length	245 mm
Width	177 mm
Height	185 mm
Weight	1.883 kg
Volume	7,140 ccm

 2 MB94	<table> <tr> <th>Ampere</th><th>16</th><th>16</th><th>16</th><th>32</th><th>32</th><th>32</th></tr> <tr> <th>Polzahl</th><th>3</th><th>4</th><th>5</th><th>3</th><th>4</th><th>5</th></tr> <tr> <td>a ø</td><td>70,0</td><td>78,0</td><td>86,0</td><td>94,0</td><td>94,0</td><td>101,0</td></tr> <tr> <td>b</td><td>95,0</td><td>95,0</td><td>97,0</td><td>118,0</td><td>118,0</td><td>117,0</td></tr> <tr> <td>c</td><td>145,0</td><td>145,0</td><td>152,0</td><td>178,0</td><td>178,0</td><td>181,0</td></tr> <tr> <td>d</td><td>111,0</td><td>111,0</td><td>119,0</td><td>136,0</td><td>136,0</td><td>138,5</td></tr> <tr> <td>e ø</td><td>18,0</td><td>18,0</td><td>21,0</td><td>23,0</td><td>23,0</td><td>27,0</td></tr> <tr> <td>Leiter mm² min</td><td>1</td><td>1</td><td>1</td><td>2,5</td><td>2,5</td><td>2,5</td></tr> <tr> <td>Leiter mm² max</td><td>2,5</td><td>2,5</td><td>2,5</td><td>6</td><td>6</td><td>6</td></tr> <tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> </table>						Ampere	16	16	16	32	32	32	Polzahl	3	4	5	3	4	5	a ø	70,0	78,0	86,0	94,0	94,0	101,0	b	95,0	95,0	97,0	118,0	118,0	117,0	c	145,0	145,0	152,0	178,0	178,0	181,0	d	111,0	111,0	119,0	136,0	136,0	138,5	e ø	18,0	18,0	21,0	23,0	23,0	27,0	Leiter mm² min	1	1	1	2,5	2,5	2,5	Leiter mm² max	2,5	2,5	2,5	6	6	6																												
Ampere	16	16	16	32	32	32																																																																																											
Polzahl	3	4	5	3	4	5																																																																																											
a ø	70,0	78,0	86,0	94,0	94,0	101,0																																																																																											
b	95,0	95,0	97,0	118,0	118,0	117,0																																																																																											
c	145,0	145,0	152,0	178,0	178,0	181,0																																																																																											
d	111,0	111,0	119,0	136,0	136,0	138,5																																																																																											
e ø	18,0	18,0	21,0	23,0	23,0	27,0																																																																																											
Leiter mm² min	1	1	1	2,5	2,5	2,5																																																																																											
Leiter mm² max	2,5	2,5	2,5	6	6	6																																																																																											