

## Panel mounting appliance inlet - without hinged cover




| Product description       |                                  |
|---------------------------|----------------------------------|
| BALS-Prd.-Nr              | 267                              |
| EAN                       | 4024941002677                    |
| Product category          | Surface mounting appliance inlet |
| Current                   | 16A                              |
| Number of poles           | 4p                               |
| Arrangement of phases     | 3P+PE                            |
| Position of earth contact | 10 h                             |
| Voltage                   | > 50V~                           |
| Frequency                 | 100 - 300Hz                      |

| Product description            |                                                                  |
|--------------------------------|------------------------------------------------------------------|
| Protection degree              | IP44                                                             |
| Colour code                    | green RAL 6002                                                   |
| Colour of appliance            | Enclosure grey RAL 7035, Collar green RAL 6002                   |
| Connection design              | with screw terminal                                              |
| Maximum conductor size         | 2,5 qmm                                                          |
| Cable entry                    | other                                                            |
| Height                         | 145mm                                                            |
| Width                          | 75mm                                                             |
| Depth                          | 78mm                                                             |
| Flange size vertical in mm     | 100mm                                                            |
| Flange size horizontal in mm   | 75mm                                                             |
| Drill hole dist. vertical mm   | 74mm                                                             |
| Drill hole dist. horizontal mm | 62mm                                                             |
| Material of enclosure          | Polyamide                                                        |
| Contacts                       | the contact carrier is made of polyamide, the contacts are brass |

| Logistics data |                 |
|----------------|-----------------|
| Weight/pcs     | 0.18 kg / Piece |
| Packaging      | Bag             |
| Content amount | 1 ST            |
| EAN            | 4024941002677   |

| Logistics data |               |
|----------------|---------------|
| Length         | 78 mm         |
| Width          | 75 mm         |
| Height         | 145 mm        |
| Weight         | 0.181 kg      |
| Volume         | 848.25 ccm    |
| Packaging      | Carton        |
| Content amount | 10 ST         |
| EAN            | 4024941833158 |
| Length         | 258 mm        |
| Width          | 183 mm        |
| Height         | 212 mm        |
| Weight         | 1.949 kg      |
| Volume         | 8,750 ccm     |

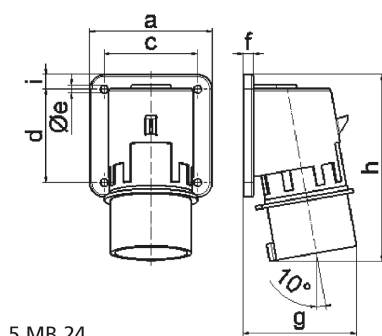

5 MB 24

| Ampere         | 16    | 16    | 16    | 32    | 32    | 32    |
|----------------|-------|-------|-------|-------|-------|-------|
| Polzahl        | 3     | 4     | 5     | 3     | 4     | 5     |
| a              | 74,0  | 75,0  | 84,0  | 90,0  | 90,0  | 90,0  |
| b              | 84,0  | 100,0 | 84,0  | 75,0  | 75,0  | 75,0  |
| c              | 58,0  | 62,0  | 64,0  | 78,0  | 78,0  | 78,0  |
| d              | 64,0  | 74,0  | 64,0  | 45,0  | 45,0  | 45,0  |
| e ø            | 5,5   | 4,3   | 5,5   | 5,5   | 5,5   | 5,5   |
| f              | 12,0  | 12,0  | 7,0   | 7,0   | 7,0   | 7,0   |
| g              | 70,0  | 77,0  | 78,0  | 86,0  | 86,0  | 88,0  |
| h              | 128,0 | 145,0 | 129,0 | 138,0 | 138,0 | 140,0 |
| i              | -     | -     | -     | 13,0  | 13,0  | 13,0  |
| Leiter mm² min | 1     | 1     | 1     | 2,5   | 2,5   | 2,5   |
| Leiter mm² max | 2,5   | 2,5   | 2,5   | 6     | 6     | 6     |
|                |       |       |       |       |       |       |
|                |       |       |       |       |       |       |

