


panel mounting socket outlet, angled - flange 114x114,  
fixing centers 90x90

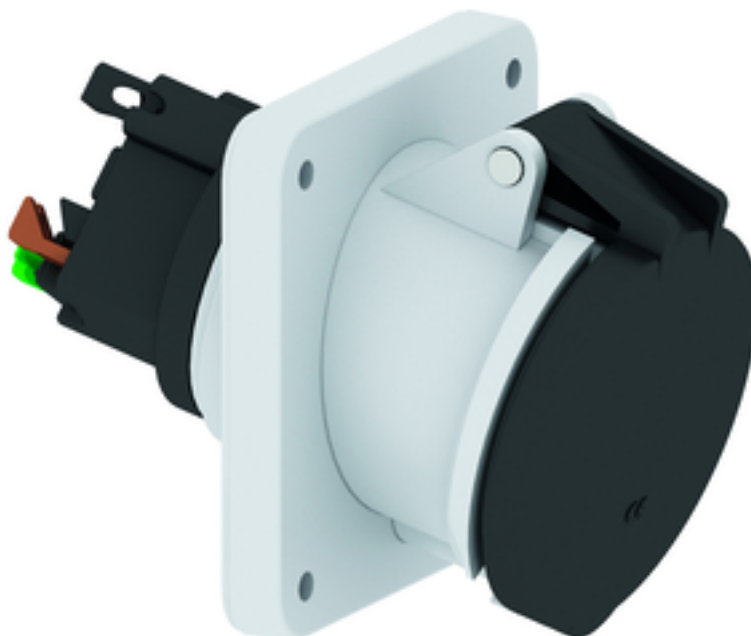

| Product description       |                                                       |
|---------------------------|-------------------------------------------------------|
| BALS-Prd.-Nr              | 120431                                                |
| EAN                       | 4024941000017                                         |
| Product category          | TE panel mounting socket outlet QUICK-CONNECT, angled |
| Current                   | 63A                                                   |
| Number of poles           | 4p                                                    |
| Arrangement of phases     | 3P+PE                                                 |
| Position of earth contact | 7 h                                                   |
| Voltage                   | 480 - 500V~                                           |

| Product description            |                                                                                                          |
|--------------------------------|----------------------------------------------------------------------------------------------------------|
| Frequency                      | 50/60Hz                                                                                                  |
| Protection degree              | IP44                                                                                                     |
| Colour code                    | black RAL 9005                                                                                           |
| Colour of appliance            | Hinged lid black RAL 9005, Enclosure grey RAL 7035                                                       |
| Connection design              | screwless spring terminal with box terminals and kontext-contact                                         |
| Maximum conductor size         | 25.0 qmm                                                                                                 |
| Cable entry                    | other                                                                                                    |
| Height                         | 119mm                                                                                                    |
| Width                          | 114mm                                                                                                    |
| Depth                          | 159mm                                                                                                    |
| Flange size vertical in mm     | 114mm                                                                                                    |
| Flange size horizontal in mm   | 114mm                                                                                                    |
| Drill hole dist. vertical mm   | 90mm                                                                                                     |
| Drill hole dist. horizontal mm | 90mm                                                                                                     |
| Material of enclosure          | Polyamide                                                                                                |
| Contacts                       | The contact carrier is made of high temperature resistant material, the contacts are brass nickel plated |

| Logistics data |                 |
|----------------|-----------------|
| Weight/pcs     | 0.57 kg / Piece |
| Packaging      | Bag             |

| Logistics data |               |
|----------------|---------------|
| Content amount | 1 ST          |
| EAN            | 4024941000017 |
| Length         | 159 mm        |
| Width          | 114 mm        |
| Height         | 119 mm        |
| Weight         | 0.571 kg      |
| Volume         | 2,156.994 ccm |
| Packaging      | Carton        |
| Content amount | 5 ST          |
| EAN            | 4024941824330 |
| Length         | 295 mm        |
| Width          | 185 mm        |
| Height         | 215 mm        |
| Weight         | 3.014 kg      |
| Volume         | 9,975 ccm     |

